

CD54T125NP-151KC Datasheet



DiGi Electronics Part Number	CD54T125NP-151KC-DG
Manufacturer	Sumida America Components Inc.
Manufacturer Product Number	CD54T125NP-151KC
Description	FIXED IND 150UH 720MA 1.1OHM SMD
Detailed Description	150 μ H Unshielded Inductor 720 mA 1.1Ohm Max Nonstandard

<https://www.DiGi-Electronics.com>



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

CD54T125NP-151KC

Series:

CD54/T125

Type:

-

Inductance:

150 μ H

Current Rating (Amps):

720 mA

Shielding:

Unshielded

Q @ Freq:

-

Ratings:

AEC-Q200

Inductance Frequency - Test:

1 kHz

Mounting Type:

Surface Mount

Supplier Device Package:

-

Height - Seated (Max):

0.205" (5.20mm)

Manufacturer:

Sumida America Components Inc.

Product Status:

Active

Material - Core:

Ferrite

Tolerance:

\pm 10%

Current - Saturation (Isat):

550mA

DC Resistance (DCR):

1.1Ohm Max

Frequency - Self Resonant:

-

Operating Temperature:

-40°C ~ 125°C

Features:

-

Package / Case:

Nonstandard

Size / Dimension:

0.240" L x 0.217" W (6.10mm x 5.50mm)

Environmental & Export classification

RoHS Status:

RoHS Compliant

ECCN:

EAR99

Moisture Sensitivity Level (MSL):

1 (Unlimited)

HTSUS:

8504.50.8000

SMD Power Inductor

CD54/T125



Description

- Ferrite drum core construction
- Magnetically unshielded
- LxWxH: 6.1x5.5x4.85mm Max.
- Product weight 0.4g(Ref.)
- Moisture Sensitivity Level: 1
- Qualification to AEC-Q200



Environmental Data

- Operating Temperature: -40°C to +125°C (including self-heating)
- Storage temperature range: -40°C~+125°C


Packaging

- Carrier tape and reel packaging

Applications

- High temp and high reliability automotive applications

Dimension - [mm]

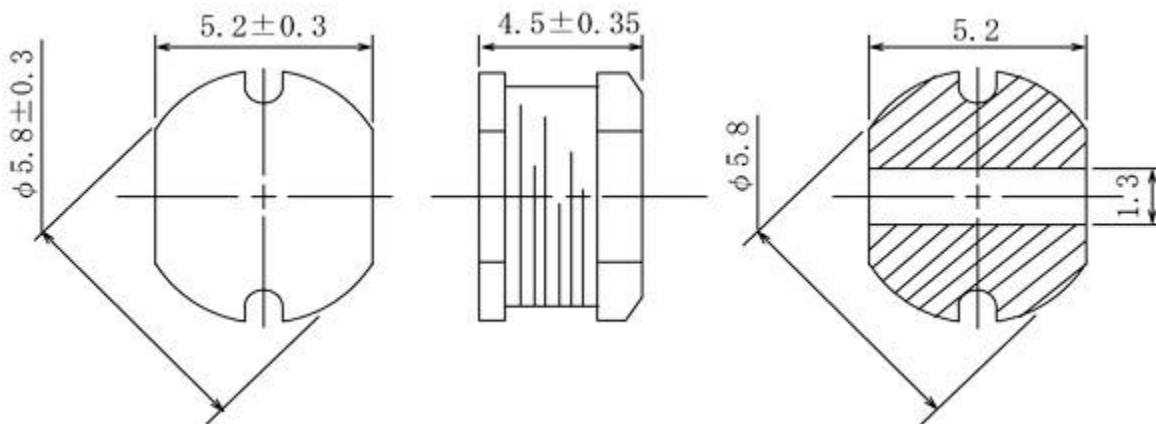


SMD Power Inductor


CD54/T125



Recommended Land pattern - [mm]



Wire Connection



SMD Power Inductor

CD54/T125



Recommended Type

Electrical Characteristics

Part Number	Inductance [Within] (μ H) ※1	D.C.R. at 20°C Max.(Typ.) (m Ω)	Saturation Current (A) Max.(Typ.) ※2	Temperature Rise Current (A) Max.(Typ.) ※3
CD54T125NP-100MC	10.00 \pm 20%	100 (55.00)	1.55 (1.94)	2.23 (2.55)
CD54T125NP-120MC	12.00 \pm 20%	120 (61.00)	1.46 (1.82)	2.15 (2.45)
CD54T125NP-150MC	15.00 \pm 20%	140 (85.00)	1.26 (1.58)	1.88 (2.15)
CD54T125NP-180MC	18.00 \pm 20%	150 (93.00)	1.19 (1.49)	1.68 (1.93)
CD54T125NP-220MC	22.00 \pm 20%	180 (123)	1.15 (1.44)	1.52 (1.75)
CD54T125NP-270MC	27.00 \pm 20%	200 (139)	1.02 (1.28)	1.44 (1.65)
CD54T125NP-330LC	33.00 \pm 15%	230 (162)	0.93 (1.16)	1.29 (1.47)
CD54T125NP-390LC	39.00 \pm 15%	320 (218)	0.82 (1.02)	1.10 (1.27)
CD54T125NP-470LC	47.00 \pm 15%	370 (247)	0.73 (0.91)	1.05 (1.21)
CD54T125NP-560KC	56.00 \pm 10%	420 (278)	0.70 (0.88)	1.00 (1.15)
CD54T125NP-680KC	68.00 \pm 10%	460 (318)	0.64 (0.80)	0.98 (1.12)
CD54T125NP-820KC	82.00 \pm 10%	600 (400)	0.57 (0.71)	0.84 (0.97)
CD54T125NP-101KC	100 \pm 10%	700 (470)	0.52 (0.65)	0.76 (0.87)
CD54T125NP-121KC	120 \pm 10%	930 (630)	0.48 (0.60)	0.65 (0.74)
CD54T125NP-151KC	150 \pm 10%	1100 (720)	0.44 (0.55)	0.62 (0.72)
CD54T125NP-181KC	180 \pm 10%	1380 (950)	0.40 (0.50)	0.54 (0.61)
CD54T125NP-221KC	220 \pm 10%	1570 (1080)	0.36 (0.45)	0.52 (0.59)



※1 Measured frequency Inductance 10 μ H \sim 82 μ H ; at 2.52 MHz

100 μ H \sim 220 μ H ; at 1 kHz

※2 Saturation current: This indicates the actual value of D.C. current when the inductance becomes 10% lower than its initial value(Ta=20°C).

※3 Temperature rise current: The actual value of D.C. current when the temperature of coil becomes $\Delta T=40^\circ\text{C}$ (Ta=20°C).

Solder Reflow Condition

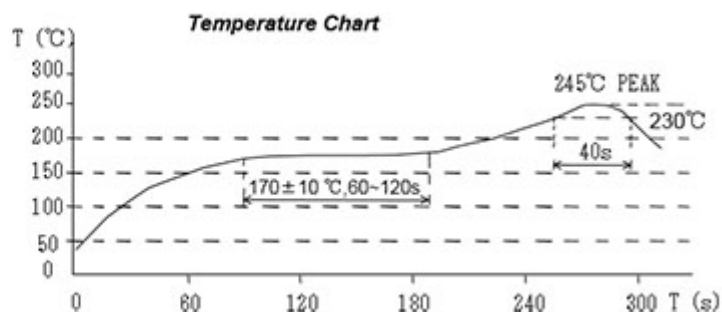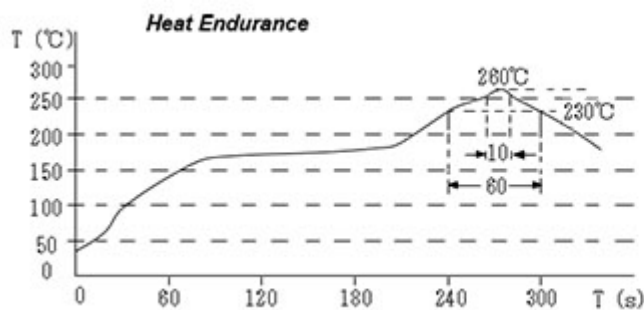

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor


CD54/T125




Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT


1. CD54T125NP-100MC

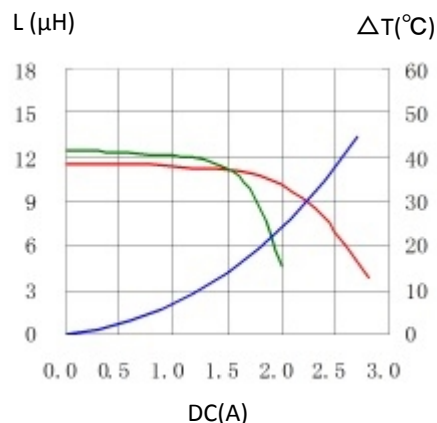


2. CD54T125NP-120MC

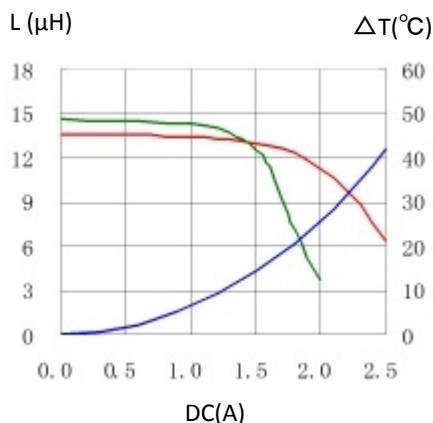


3. CD54T125NP-150MC

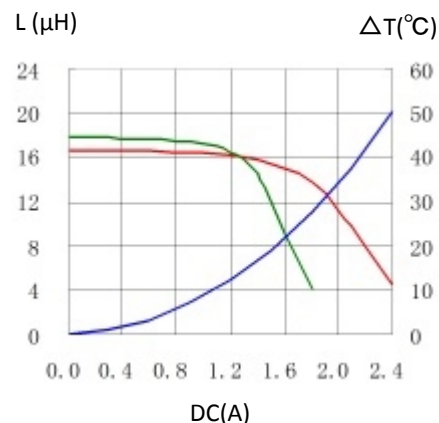


4. CD54T125NP-180MC

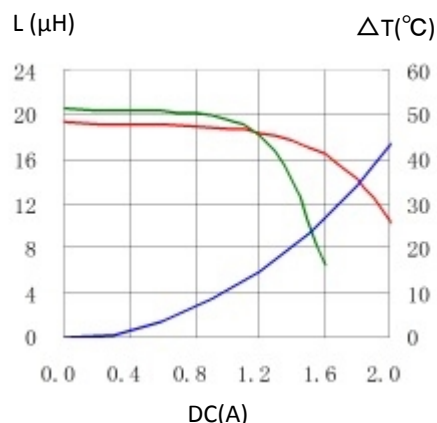


5. CD54T125NP-220MC

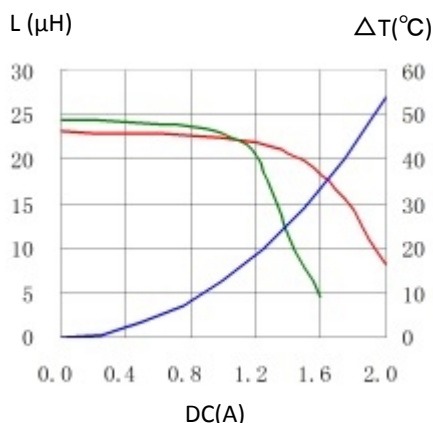


6. CD54T125NP-270MC

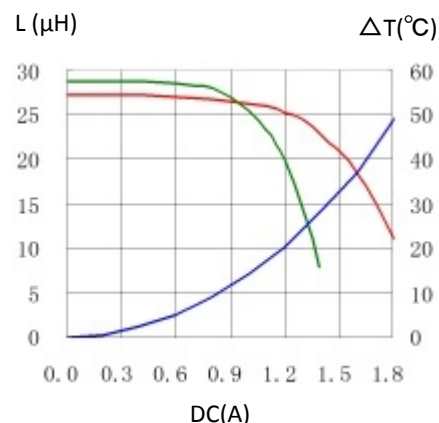


7. CD54T125NP-330LC

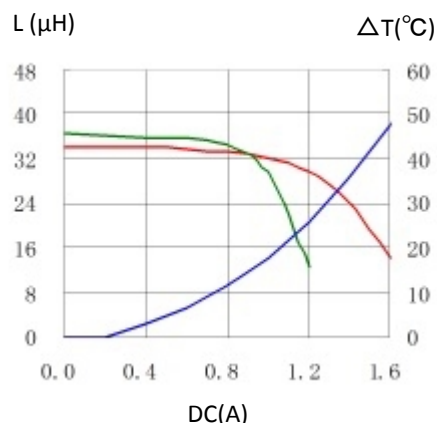

8. CD54T125NP-390LC

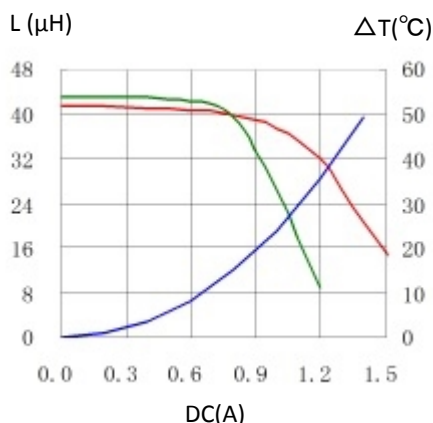

9. CD54T125NP-470LC

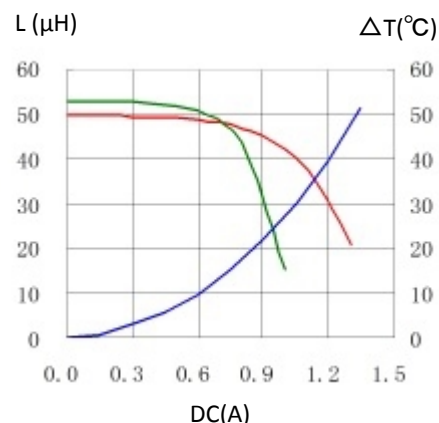


Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor


CD54/T125




10. CD54T125NP-560KC

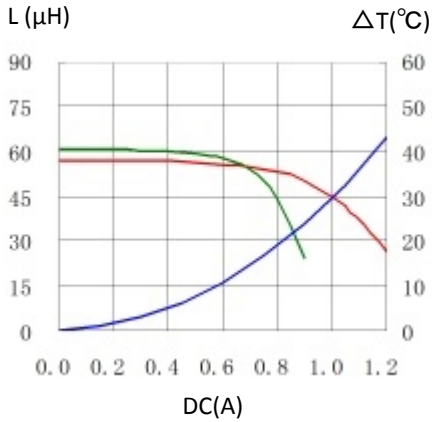


11. CD54T125NP-680KC

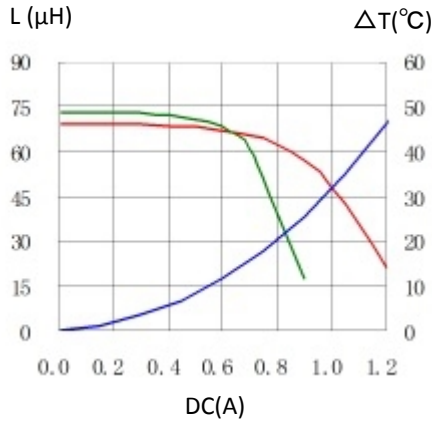


12. CD54T125NP-820KC

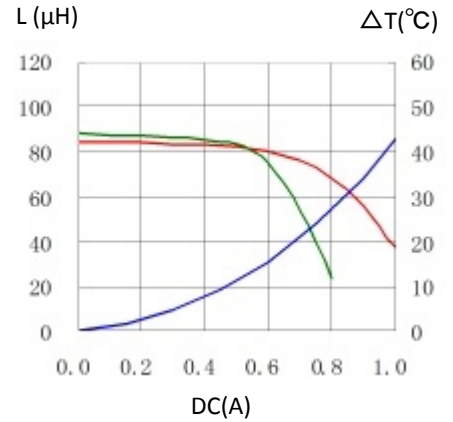


13. CD54T125NP-101KC

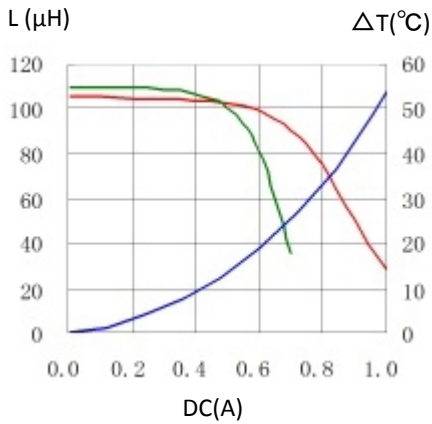


14. CD54T125NP-121KC

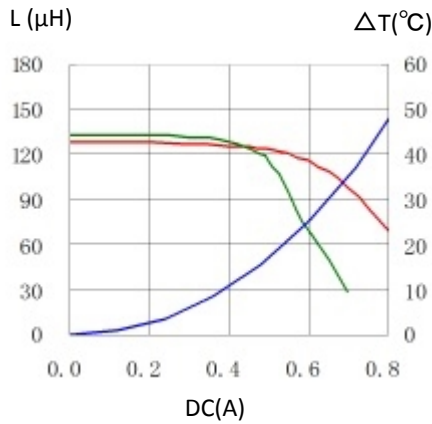


15. CD54T125NP-151KC

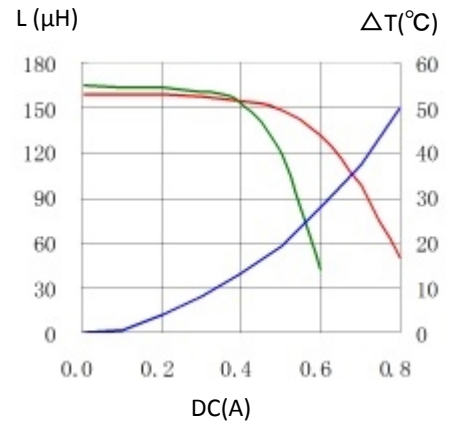

16. CD54T125NP-181KC

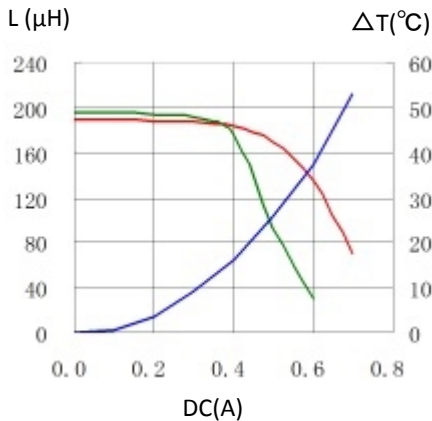

17. CD54T125NP-221KC

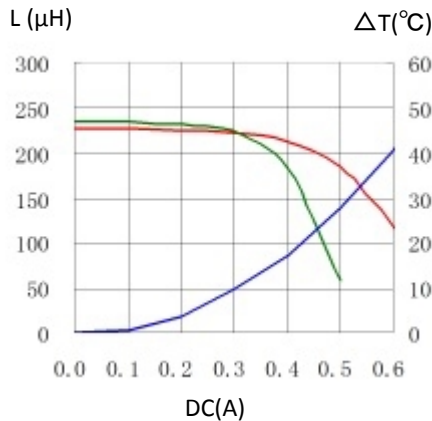

For sales office information, please [click here](#) to visit our website.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.