

CDRH40D28T125NP-2R2NC Datasheet



DiGi Electronics Part Number	CDRH40D28T125NP-2R2NC-DG
Manufacturer	Sumida America Components Inc.
Manufacturer Product Number	CDRH40D28T125NP-2R2NC
Description	FIXED IND 2.2UH 2.7A 56 MOHM SMD
Detailed Description	2.2 μ H Shielded Inductor 2.7 A 56mOhm Max Nons tandard

<https://www.DiGi-Electronics.com>



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

CDRH40D28T125NP-2R2NC

Series:

CDRH40D28/T125

Type:

-

Inductance:

2.2 μ H

Current Rating (Amps):

2.7 A

Shielding:

Shielded

Q @ Freq:

-

Ratings:

-

Inductance Frequency - Test:

100 kHz

Mounting Type:

Surface Mount

Supplier Device Package:

-

Height - Seated (Max):

0.118" (3.00mm)

Manufacturer:

Sumida America Components Inc.

Product Status:

Active

Material - Core:

Ferrite

Tolerance:

\pm 30%

Current - Saturation (Isat):

1.85A

DC Resistance (DCR):

56mOhm Max

Frequency - Self Resonant:

-

Operating Temperature:

-40°C ~ 125°C

Features:

-

Package / Case:

Nonstandard

Size / Dimension:

0.177" L x 0.177" W (4.50mm x 4.50mm)

Environmental & Export classification

RoHS Status:

RoHS Compliant

ECCN:

EAR99

Moisture Sensitivity Level (MSL):

1 (Unlimited)

HTSUS:

8504.50.8000

SMD Power Inductor

CDRH40D28/T125



Recommended Type

Description

- Ferrite drum core construction.
- Magnetically shielded.
- LxWxH:4.5x4.5x3.0mm Max.
- Product weight:0.13 g (Ref.)
- Moisture Sensitivity Level: 1



Environmental Data

- Operating temperature range: -40°C~+125°C (including coil's self temperature rise)
- Storage condition of before PCB mounting : Ta:5~40°C、RH:20~70%


Packaging

- Carrier tape and reel packaging.
- 13.0" diameter reel. 2000pcs per reel.


Applications

- Automotive application and other high temperature,high reliability application type withstand up to 125°C.


Dimension - [mm]

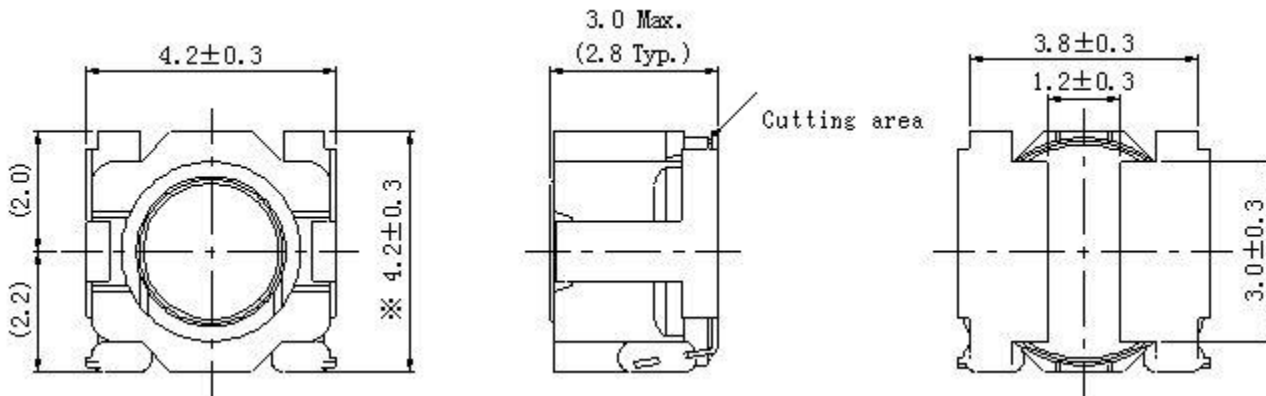

Recommended Land pattern - [mm]



Wire Connection



Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor

CDRH40D28/T125



Electrical Characteristics



Part Number	Inductance [Within] (μ H) ※1	D.C.R. at 20°C Max.(Typ.) (m Ω)	Saturation Current (A) Max.(Typ.) ※2		Temperature Rise Current (A) Max.(Typ.) ※3
			20°C	125°C	
CDRH40D28T125NP-1R5NC	1.50 \pm 30%	43.50 (35.00)	2.20 (2.76)	1.92 (2.41)	(3.00)
CDRH40D28T125NP-1R8NC	1.80 \pm 30%	50.00 (40.00)	2.00 (2.50)	1.76 (2.20)	(2.75)
CDRH40D28T125NP-2R2NC	2.20 \pm 30%	56.00 (45.00)	1.85 (2.32)	1.56 (1.95)	(2.70)
CDRH40D28T125NP-3R3NC	3.30 \pm 30%	68.50 (55.00)	1.59 (1.99)	1.36 (1.70)	(2.35)
CDRH40D28T125NP-4R7NC	4.70 \pm 30%	85.00 (68.00)	1.29 (1.62)	1.12 (1.40)	(2.00)
CDRH40D28T125NP-5R6NC	5.60 \pm 30%	112 (90.00)	1.20 (1.50)	1.03 (1.29)	(1.70)
CDRH40D28T125NP-6R8NC	6.80 \pm 30%	118 (95.00)	1.08 (1.35)	0.93 (1.16)	(1.65)
CDRH40D28T125NP-100NC	10.00 \pm 30%	206 (165)	0.82 (1.02)	0.72 (0.90)	(1.35)
CDRH40D28T125NP-150NC	15.00 \pm 30%	240 (192)	0.72 (0.90)	0.62 (0.77)	(1.20)
CDRH40D28T125NP-220NC	22.00 \pm 30%	393 (315)	0.61 (0.76)	0.53 (0.66)	(0.90)
CDRH40D28T125NP-330NC	33.00 \pm 30%	619 (495)	0.49 (0.61)	0.42 (0.52)	(0.66)

※1 Measuring frequency inductance at 100kHz,1V.

※2 Saturation current: This indicates the actual value of D.C. current when the inductance becomes 35% lower than its nominal value.

※3 Temperature rise current: The actual value of D.C. current when the temperature of coil becomes $\Delta T=40^{\circ}\text{C}$ ($T_a=20^{\circ}\text{C}$).

Solder Reflow Condition

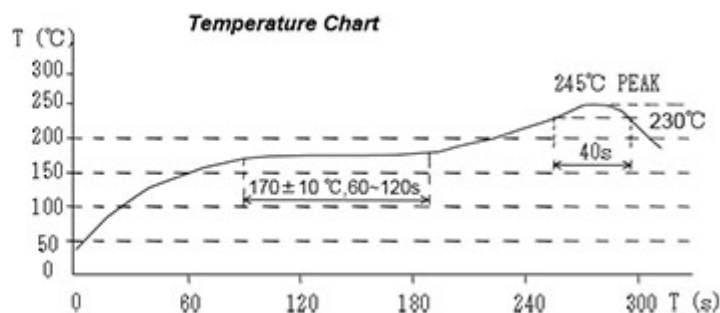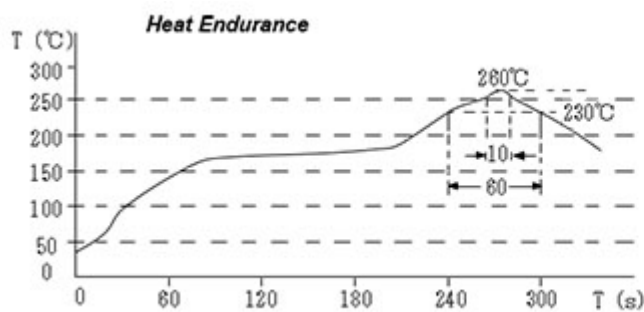

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor


CDRH40D28/T125




Saturation Current & Temperature Rise Graph

— L (20°C) — L (125°C) — ΔT


1. CDRH40D28T125NP-1R5NC

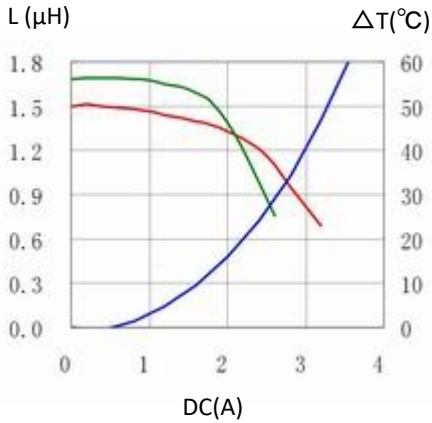


2. CDRH40D28T125NP-1R8NC

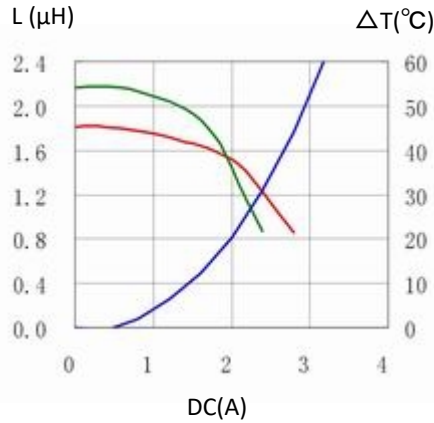


3. CDRH40D28T125NP-2R2NC

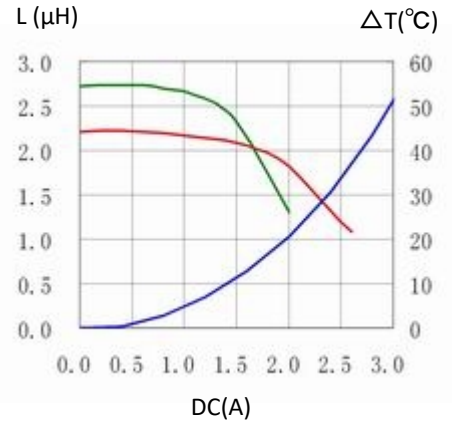


4. CDRH40D28T125NP-3R3NC

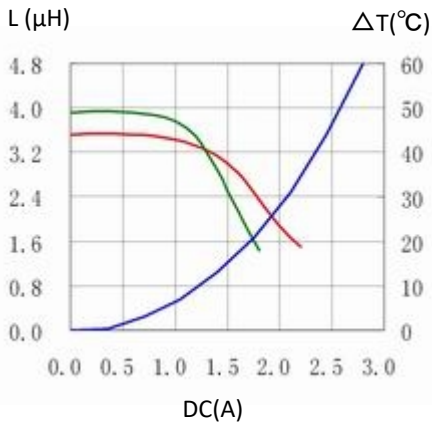


5. CDRH40D28T125NP-4R7NC

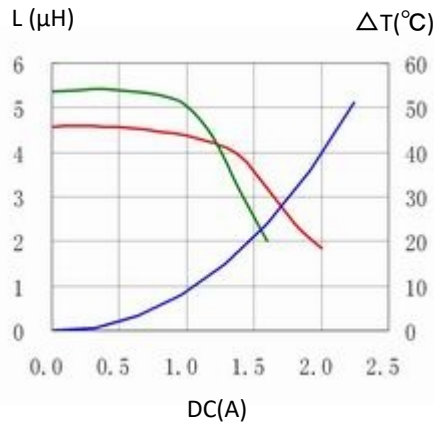


6. CDRH40D28T125NP-5R6NC

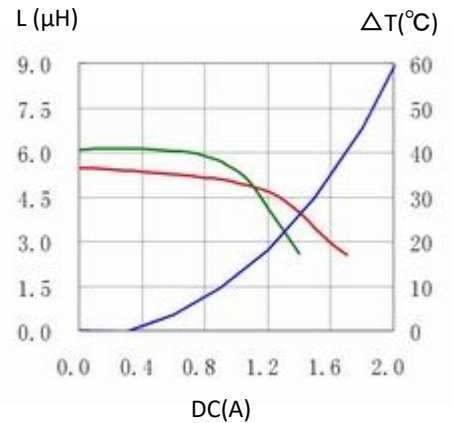


7. CDRH40D28T125NP-6R8NC

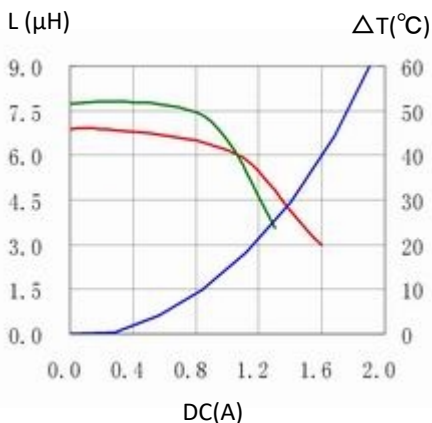

8. CDRH40D28T125NP-100NC

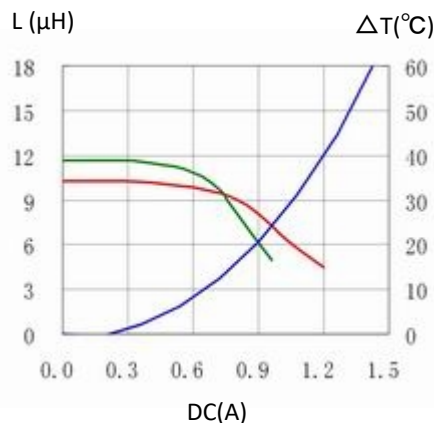

9. CDRH40D28T125NP-150NC

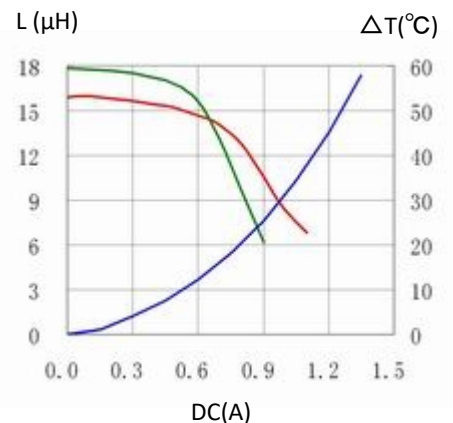

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.



SMD Power Inductor

CDRH40D28/T125



10. CDRH40D28T125NP-220NC

11. CDRH40D28T125NP-330NC

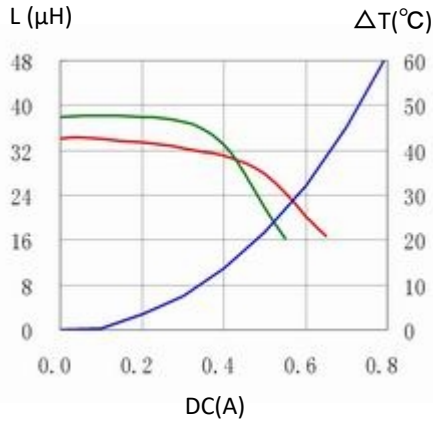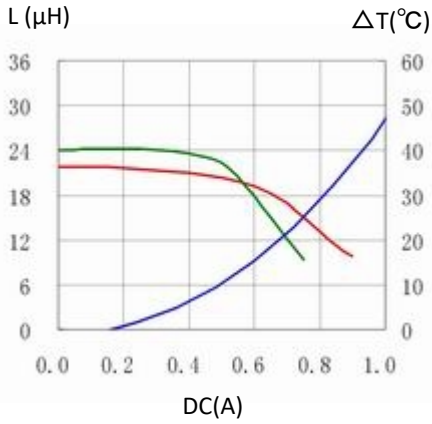

For sales office information, please [click here](#) to visit our website.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.