

# CDRH80D65BT150NP-680MC Datasheet

[www.digi-electronics.com](http://www.digi-electronics.com)



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	CDRH80D65BT150NP-680MC-DG
Manufacturer	<a href="#">Sumida America Components Inc.</a>
Manufacturer Product Number	CDRH80D65BT150NP-680MC
Description	FIXED IND 68UH 1.57A 131MOHM SMD
Detailed Description	68 $\mu$ H Shielded Inductor 1.57 A 131mOhm Nonstandard



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

**Manufacturer Product Number:**

CDRH80D65BT150NP-680MC

**Series:**

CDRH80D65B/T150

**Type:**

-

**Inductance:**68  $\mu$ H**Current Rating (Amps):**

1.57 A

**Shielding:**

Shielded

**Q @ Freq:**

-

**Ratings:**

AEC-Q200

**Inductance Frequency - Test:**

100 kHz

**Mounting Type:**

Surface Mount

**Supplier Device Package:**

-

**Height - Seated (Max):**

0.268" (6.80mm)

**Manufacturer:**

Sumida America Components Inc.

**Product Status:**

Active

**Material - Core:**

Ferrite

**Tolerance:** $\pm$ 20%**Current - Saturation (Isat):**

1.67A

**DC Resistance (DCR):**

131mOhm

**Frequency - Self Resonant:**

-

**Operating Temperature:**

-55°C ~ 150°C

**Features:**

-

**Package / Case:**

Nonstandard

**Size / Dimension:**

0.339" L x 0.323" W (8.60mm x 8.20mm)

## Environmental & Export classification

**RoHS Status:**

ROHS3 Compliant

**REACH Status:**

Vendor Undefined

**HTSUS:**

8504.50.8000

**Moisture Sensitivity Level (MSL):**

1 (Unlimited)

**ECCN:**

EAR99



# SMD Power Inductor

## CDRH80D65B/T150



### Description


- Ferrite drum core construction
- Magnetically shielded
- Qualified AEC-Q200
- Operating Temperature: -55°C to +150°C (including self-heating)




### Applications

- LED Head light for Automobile
- ECU, DC/DC converter
- Automotive and other high temperature, high reliability application


### Dimension [mm]

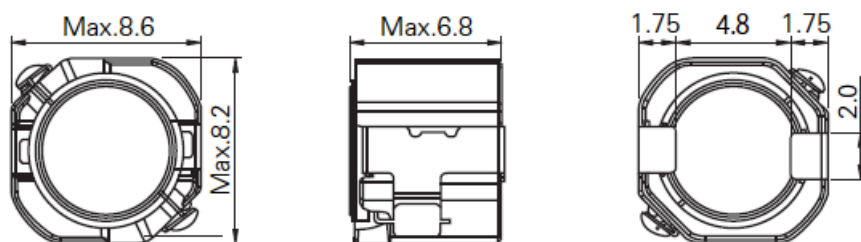


### Reference Land pattern [mm]

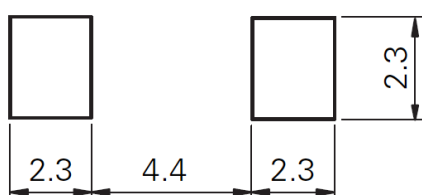

### Stamp Example

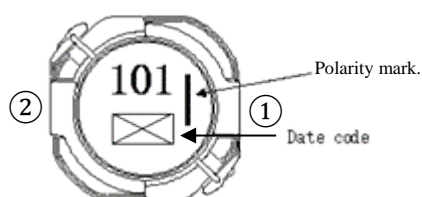

### Connection (Bottom View)



Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.



# SMD Power Inductor

## CDRH80D65B/T150



### Electrical Characteristics

Part No.	Inductance ( $\mu$ H) ※1	D.C.R (m $\Omega$ ) ( $\pm$ 30%)	Saturation Current (A) at 20°C TYP. ※2	Temperature Rise Current (A) TYP. ※3
CDRH80D65BT150NP-1R0NC	1.0 $\pm$ 30%	6.4	14.3	8.74
CDRH80D65BT150NP-1R5NC	1.5 $\pm$ 30%	7.5	11.6	7.80
CDRH80D65BT150NP-2R2NC	2.2 $\pm$ 30%	9.6	9.50	6.71
CDRH80D65BT150NP-3R3NC	3.3 $\pm$ 30%	10.8	7.65	6.35
CDRH80D65BT150NP-3R9NC	3.9 $\pm$ 30%	11.8	7.05	6.10
CDRH80D65BT150NP-4R7NC	4.7 $\pm$ 30%	13.2	6.49	5.49
CDRH80D65BT150NP-6R8NC	6.8 $\pm$ 30%	15.8	5.40	5.02
CDRH80D65BT150NP-100MC	10 $\pm$ 20%	19.8	4.50	4.54
CDRH80D65BT150NP-150MC	15 $\pm$ 20%	35.0	3.55	3.16
CDRH80D65BT150NP-220MC	22 $\pm$ 20%	49.0	2.94	2.83
CDRH80D65BT150NP-330MC	33 $\pm$ 20%	86.0	2.42	1.93
CDRH80D65BT150NP-470MC	47 $\pm$ 20%	105	2.02	1.74
CDRH80D65BT150NP-680MC	68 $\pm$ 20%	131	1.67	1.57
CDRH80D65BT150NP-101MC	100 $\pm$ 20%	168	1.41	1.37
CDRH80D65BT150NP-151MC	150 $\pm$ 20%	267	1.17	1.09
CDRH80D65BT150NP-221MC	220 $\pm$ 20%	475	0.94	0.73
CDRH80D65BT150NP-331MC	330 $\pm$ 20%	646	0.77	0.67
CDRH80D65BT150NP-471MC	470 $\pm$ 20%	799	0.64	0.61
CDRH80D65BT150NP-681MC	680 $\pm$ 20%	1180	0.53	0.46
CDRH80D65BT150NP-102MC	1000 $\pm$ 20%	1980	0.43	0.35

※ Measuring frequency inductance at 100kHz,1V.

※ Saturation current: DC current which becomes inductance value drop by 30% from the nominal value.

※ Temperature rise current: The value of D.C. current when the temperature of coil becomes  $\Delta T=40^{\circ}\text{C}$ ( $T_a=20^{\circ}\text{C}$ ).

Please note that when using the product for automotive while applying current with audio-frequency (AF) signals may result in audible noises due to magnetostriction. Also, in order to avoid noise problem, operating with Non-AF signals would be recommended. The noise may amplify depending on the coil mount area on the PCB.

Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.




# SMD Power Inductor CDRH80D65B/T150




Saturation Current & Temperature Rise Graph — L (25°C) — L (150°C) —  $\Delta T$


CDRH80D65BT150NP-1R0NC

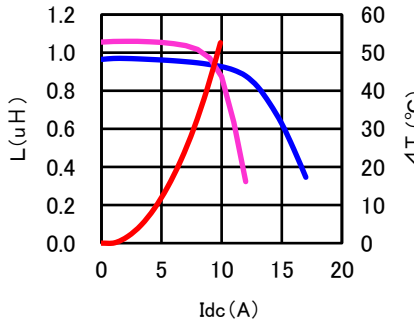


CDRH80D65BT150NP-1R5NC

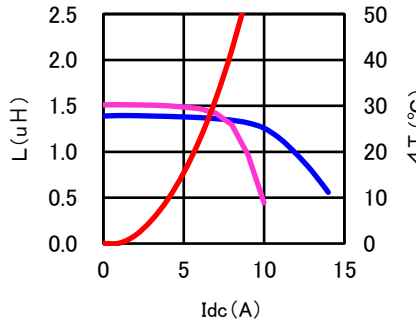


CDRH80D65BT150NP-2R2NC

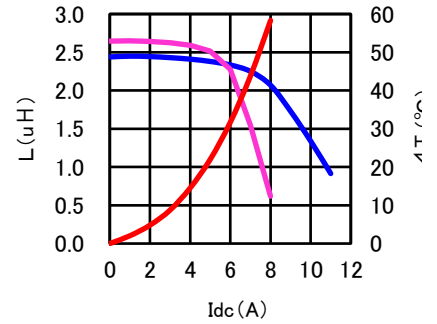


CDRH80D65BT150NP-3R3NC

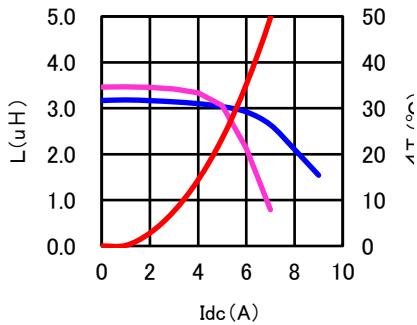


CDRH80D65BT150NP-3R9NC

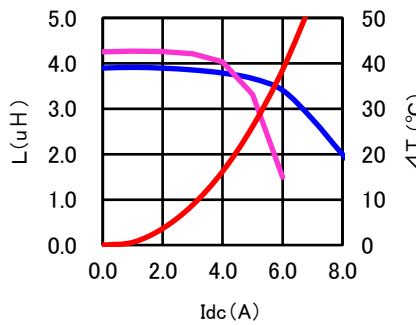


CDRH80D65BT150NP-4R7NC

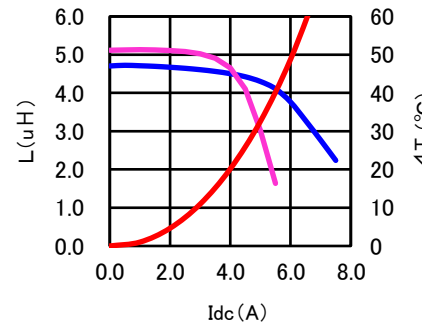


CDRH80D65BT150NP-6R8NC

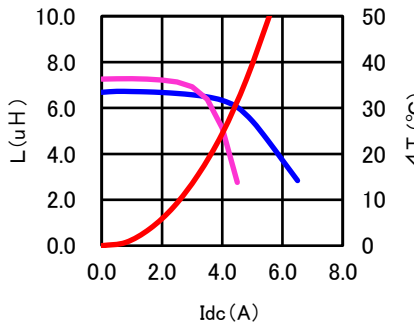

CDRH80D65BT150NP-100MC

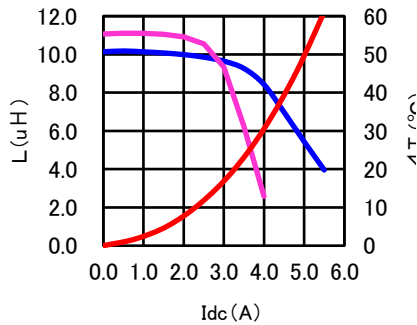

CDRH80D65BT150NP-150MC

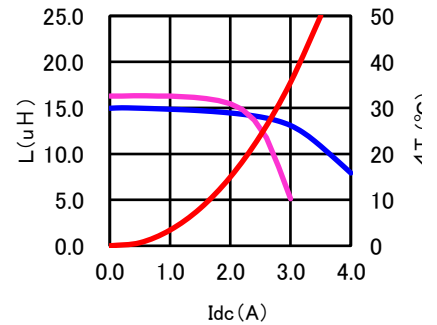

Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.




# SMD Power Inductor CDRH80D65B/T150




Saturation Current & Temperature Rise Graph — L (25°C) — L (150°C) —  $\Delta T$


**CDRH80D65BT150NP-220MC**

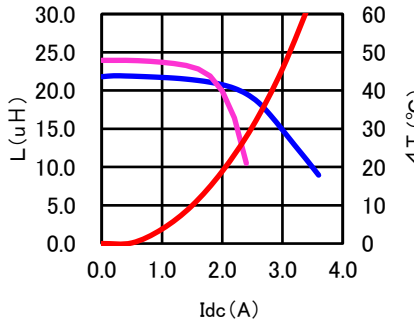


**CDRH80D65BT150NP-330MC**

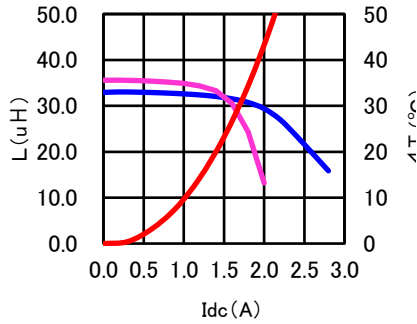


**CDRH80D65BT150NP-470MC**

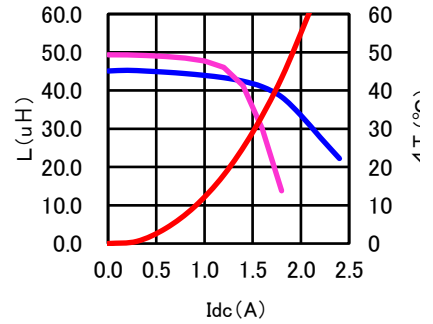


**CDRH80D65BT150NP-680MC**

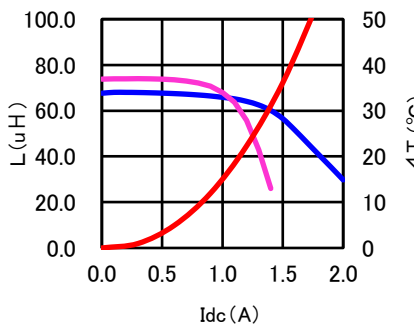


**CDRH80D65BT150NP-101MC**

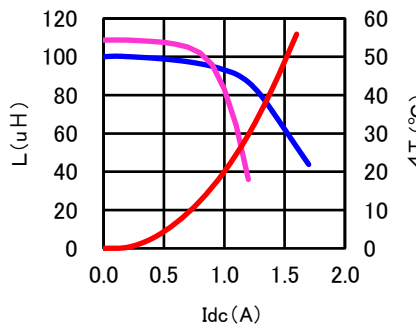


**CDRH80D65BT150NP-151MC**

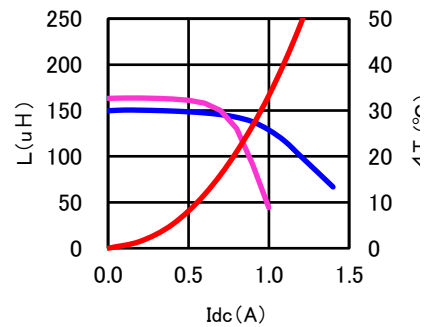


**CDRH80D65BT150NP-221MC**

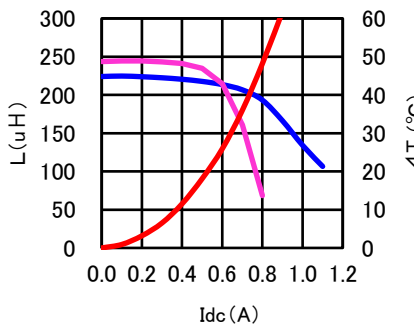

**CDRH80D65BT150NP-331MC**

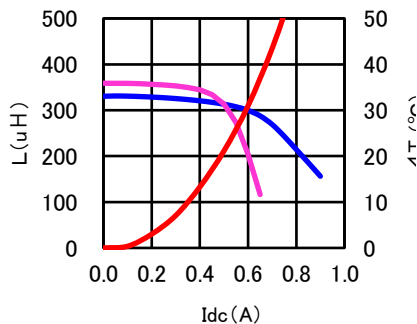

**CDRH80D65BT150NP-471MC**

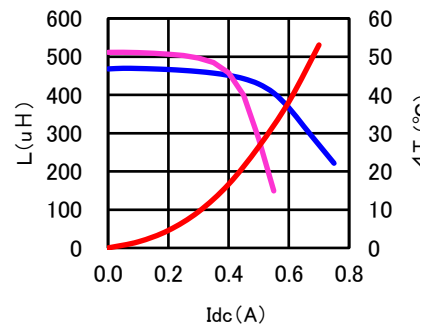

Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.




# SMD Power Inductor CDRH80D65B/T150




Saturation Current & Temperature Rise Graph — L (25°C) — L (150°C) —  $\Delta T$

CDRH80D65BT150NP-681MC

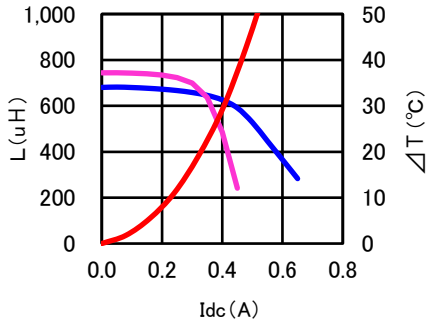

CDRH80D65BT150NP-102MC

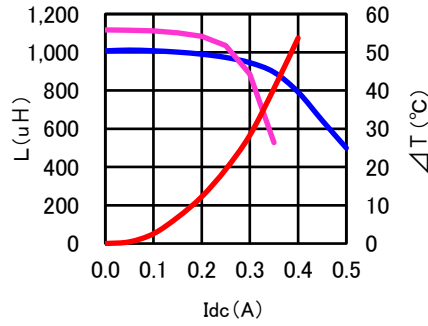

For sales office information, please [click here](#) to visit our website.

Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.