


MLF1005VR22KT Datasheet

www.digi-electronics.com

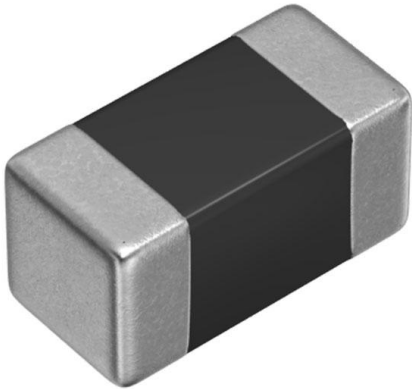

<https://www.DiGi-Electronics.com>

| | |
|------------------------------|---|
| DiGi Electronics Part Number | MLF1005VR22KT-DG |
| Manufacturer | TDK Corporation |
| Manufacturer Product Number | MLF1005VR22KT |
| Description | FIXED IND 220NH 160MA 790MOHM SM |
| Detailed Description | 220 nH Shielded Multilayer Inductor 160 mA 790mOhm Max 0402 (1005 Metric) |



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

MLF1005VR22KT

Series:

MLF

Type:

Multilayer

Inductance:

220 nH

Current Rating (Amps):

160 mA

Shielding:

Shielded

Q @ Freq:

15 @ 25MHz

Ratings:

-

Inductance Frequency - Test:

25 MHz

Package / Case:

0402 (1005 Metric)

Size / Dimension:

0.039" L x 0.020" W (1.00mm x 0.50mm)

Manufacturer:

TDK Corporation

Product Status:

Active

Material - Core:

Ferrite

Tolerance:

±10%

Current - Saturation (Isat):

-

DC Resistance (DCR):

790mOhm Max

Frequency - Self Resonant:

290MHz

Operating Temperature:

-55°C ~ 125°C

Mounting Type:

Surface Mount

Supplier Device Package:

0402 (1005 Metric)

Height - Seated (Max):

0.022" (0.55mm)

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8504.50.8000

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

Inductors for standard circuits

Multilayer ferrite

MLF series



MLF1005 type



FEATURES

- The lineup includes a wide inductance range.
- Highly reliable monolithic structure with multilayer integration.
- Operating temperature range: -55 to +125°C

APPLICATION

- Smart phones, tablet terminals, tuners, LCD-TVs, PDP-TVs, audio equipment, computers, signal processing for modules etc.
- Application guides: [Smart phones/tablets](#)

PART NUMBER CONSTRUCTION

| | | | | | | |
|-------------|------------------------------------|-----------------|--------------------------|-------------------------|-----------------|---------------|
| MLF | 1005 | V | R10 | △ | T | 000 |
| Series name | LxWxH dimensions 1.0x0.5x0.5 mm | Characteristics | Inductance (μ H) | Inductance tolerance | Packaging style | Internal code |

* The " Δ " of the Part Number contains the inductance tolerance code, J ($\pm 5\%$), K ($\pm 10\%$), or M ($\pm 20\%$).


CHARACTERISTICS SPECIFICATION TABLE

| L (μ H) | Q Tolerance | L, Q measuring conditions | | Self-resonant frequency (MHz)min. (MHz)typ. | DC resistance (Ω)max. (Ω)typ. | Rated current (mA)max. | Part No.* | | |
|-----------------|-------------------------|------------------------------|------|--|--|---------------------------|-----------|-----|--|
| | | min. | typ. | | | | | | |
| 0.10 | $\pm 5\%$ $\pm 10\%$ | 10 | 30 | 25 | 1.0 | 450 880 | 0.51 0.33 | 180 | MLF1005VR10JT000 MLF1005VR10KT000 |
| 0.12 | $\pm 5\%$ $\pm 10\%$ | 10 | 30 | 25 | 1.0 | 400 800 | 0.59 0.33 | 180 | MLF1005VR12JT000 MLF1005VR12KT000 |
| 0.15 | $\pm 5\%$ $\pm 10\%$ | 15 | 30 | 25 | 1.0 | 350 650 | 0.63 0.39 | 180 | MLF1005VR15JT000 MLF1005VR15KT000 |
| 0.18 | $\pm 5\%$ $\pm 10\%$ | 15 | 30 | 25 | 1.0 | 320 600 | 0.72 0.40 | 160 | MLF1005VR18JT000 MLF1005VR18KT000 |
| 0.22 | $\pm 5\%$ $\pm 10\%$ | 15 | 30 | 25 | 1.0 | 290 450 | 0.79 0.47 | 160 | MLF1005VR22JT000 MLF1005VR22KT000 |
| 0.27 | $\pm 5\%$ $\pm 10\%$ | 15 | 30 | 25 | 1.0 | 260 450 | 0.91 0.65 | 150 | MLF1005VR27JT000 MLF1005VR27KT000 |
| 0.33 | $\pm 5\%$ $\pm 10\%$ | 15 | 30 | 25 | 1.0 | 230 380 | 1.05 0.8 | 140 | MLF1005VR33JT000 MLF1005VR33KT000 |
| 0.39 | $\pm 5\%$ $\pm 10\%$ | 15 | 30 | 25 | 1.0 | 210 330 | 1.35 0.89 | 130 | MLF1005VR39JT000 MLF1005VR39KT000 |
| 0.47 | $\pm 5\%$ $\pm 10\%$ | 15 | 30 | 25 | 1.0 | 190 300 | 1.50 0.95 | 120 | MLF1005VR47JT000 MLF1005VR47KT000 |
| 0.56 | $\pm 5\%$ $\pm 10\%$ | 15 | 30 | 25 | 1.0 | 170 250 | 1.95 1.35 | 120 | MLF1005VR56JT000 MLF1005VR56KT000 |
| 0.39 | $\pm 5\%$ $\pm 10\%$ | 30 | 50 | 10 | 1.0 | 210 600 | 0.41 0.24 | 50 | MLF1005GR39JT000 MLF1005GR39KT000 |

Measurement equipment

| Measurement item | Product No. | Manufacturer |
|-------------------------|--------------|-----------------------|
| L, Q | 4294A+16034G | Keysight Technologies |
| Self-resonant frequency | E4991A | Keysight Technologies |
| DC resistance | Type-7561 | Yokogawa |

* Equivalent measurement equipment may be used.



⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (1/6)
Please note that the contents may change without any prior notice due to reasons such as upgrading.

20190111

inductor_commercial_standard_mlf1005_en

MLF1005 type

CHARACTERISTICS SPECIFICATION TABLE

| L (μ H) | Q Tolerance | Q | | L, Q measuring conditions | | Self-resonant frequency | | DC resistance | | Rated current | Part No.* |
|-----------------|-------------------------|------|------|---------------------------|--------------|-------------------------|-----------|------------------|------------------|---------------|--|
| | | min. | typ. | Frequency (MHz) | Current (mA) | (MHz)min. | (MHz)typ. | (Ω)max. | (Ω)typ. | (mA)max. | |
| 0.47 | $\pm 5\%$ $\pm 10\%$ | 30 | 55 | 10 | 1.0 | 190 | 460 | 0.42 | 0.25 | 50 | MLF1005GR47JT000 MLF1005GR47KT000 |
| 0.56 | $\pm 5\%$ $\pm 10\%$ | 30 | 55 | 10 | 1.0 | 170 | 450 | 0.47 | 0.34 | 45 | MLF1005GR56JT000 MLF1005GR56KT000 |
| 0.68 | $\pm 5\%$ $\pm 10\%$ | 30 | 55 | 10 | 1.0 | 150 | 360 | 0.55 | 0.43 | 45 | MLF1005GR68JT000 MLF1005GR68KT000 |
| 0.82 | $\pm 5\%$ $\pm 10\%$ | 30 | 60 | 10 | 1.0 | 130 | 320 | 0.59 | 0.43 | 40 | MLF1005GR82JT000 MLF1005GR82KT000 |
| 1.0 | $\pm 5\%$ $\pm 10\%$ | 30 | 60 | 10 | 1.0 | 120 | 290 | 0.64 | 0.45 | 40 | MLF1005G1R0JT000 MLF1005G1R0KT000 |
| 1.2 | $\pm 5\%$ $\pm 10\%$ | 30 | 60 | 10 | 1.0 | 110 | 230 | 0.79 | 0.55 | 35 | MLF1005G1R2JT000 MLF1005G1R2KT000 |
| 1.5 | $\pm 5\%$ $\pm 10\%$ | 30 | 60 | 10 | 1.0 | 100 | 200 | 0.95 | 0.68 | 35 | MLF1005G1R5JT000 MLF1005G1R5KT000 |
| 1.8 | $\pm 5\%$ $\pm 10\%$ | 30 | 60 | 10 | 1.0 | 90 | 180 | 1.05 | 0.75 | 30 | MLF1005G1R8JT000 MLF1005G1R8KT000 |
| 2.2 | $\pm 5\%$ $\pm 10\%$ | 30 | 60 | 10 | 1.0 | 80 | 150 | 1.3 | 0.99 | 30 | MLF1005G2R2JT000 MLF1005G2R2KT000 |



Measurement equipment

| Measurement item | Product No. | Manufacturer |
|-------------------------|--------------|-----------------------|
| L, Q | 4294A+16034G | Keysight Technologies |
| Self-resonant frequency | E4991A | Keysight Technologies |
| DC resistance | Type-7561 | Yokogawa |

* Equivalent measurement equipment may be used.

MLF1005 type

L FREQUENCY CHARACTERISTICS

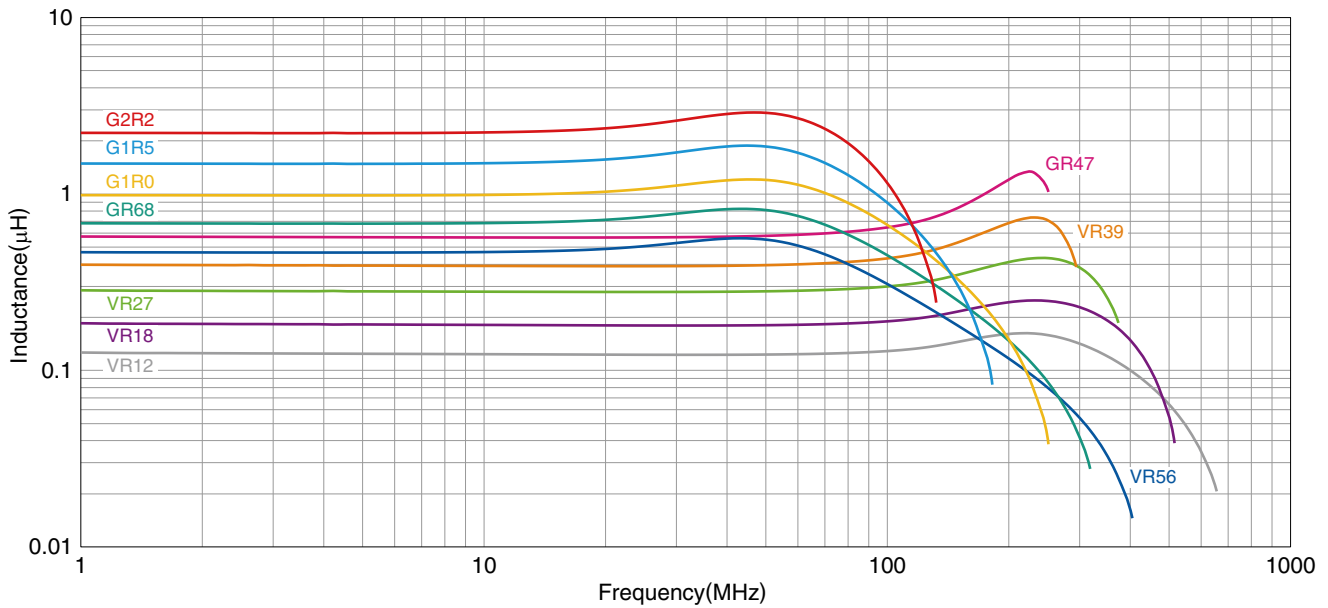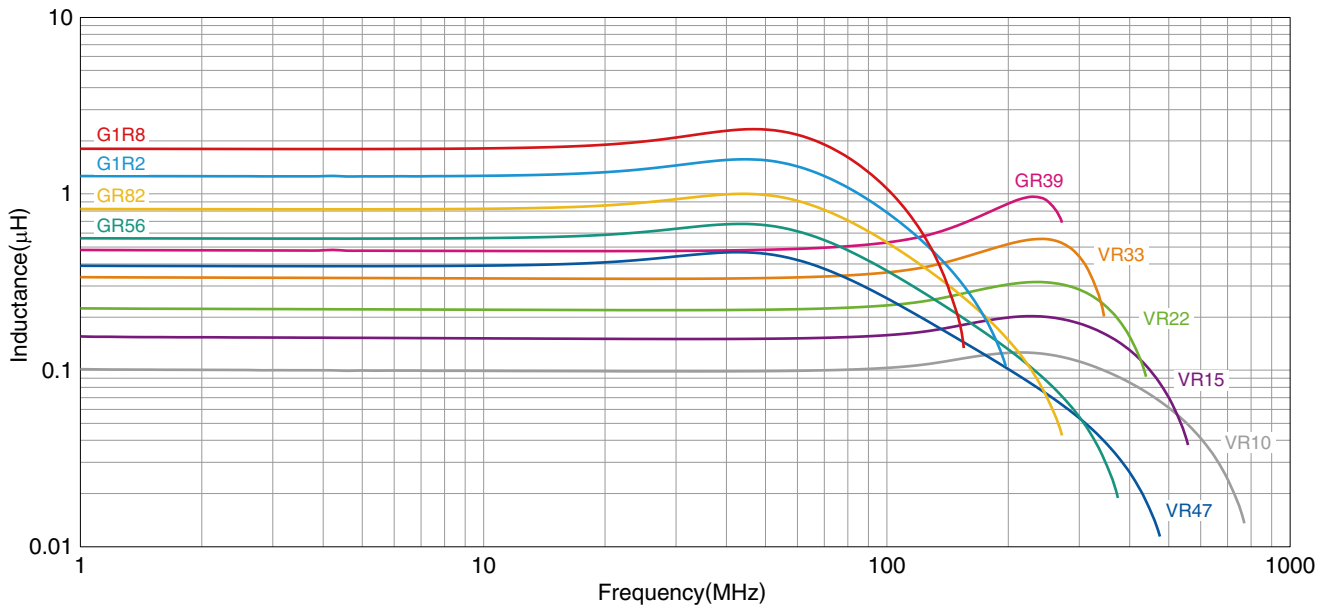



Measurement equipment

| Product No. | Manufacturer |
|---------------|-----------------------|
| E4991A+16192A | Keysight Technologies |

* Equivalent measurement equipment may be used.

MLF1005 type

Q FREQUENCY CHARACTERISTICS

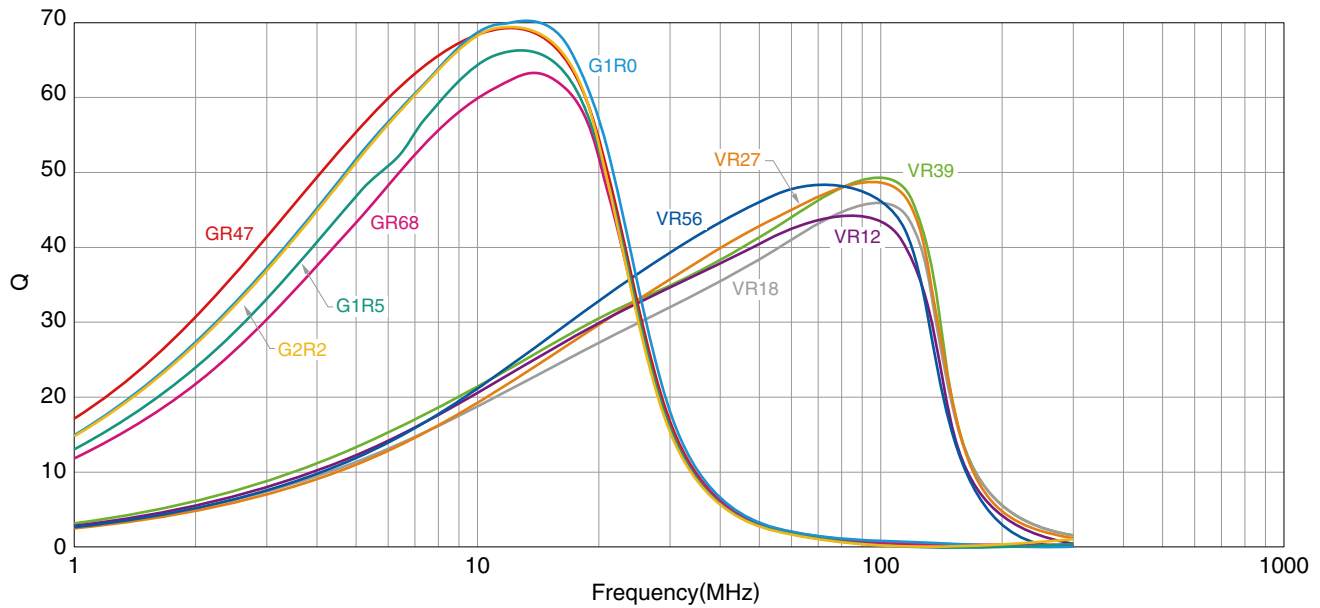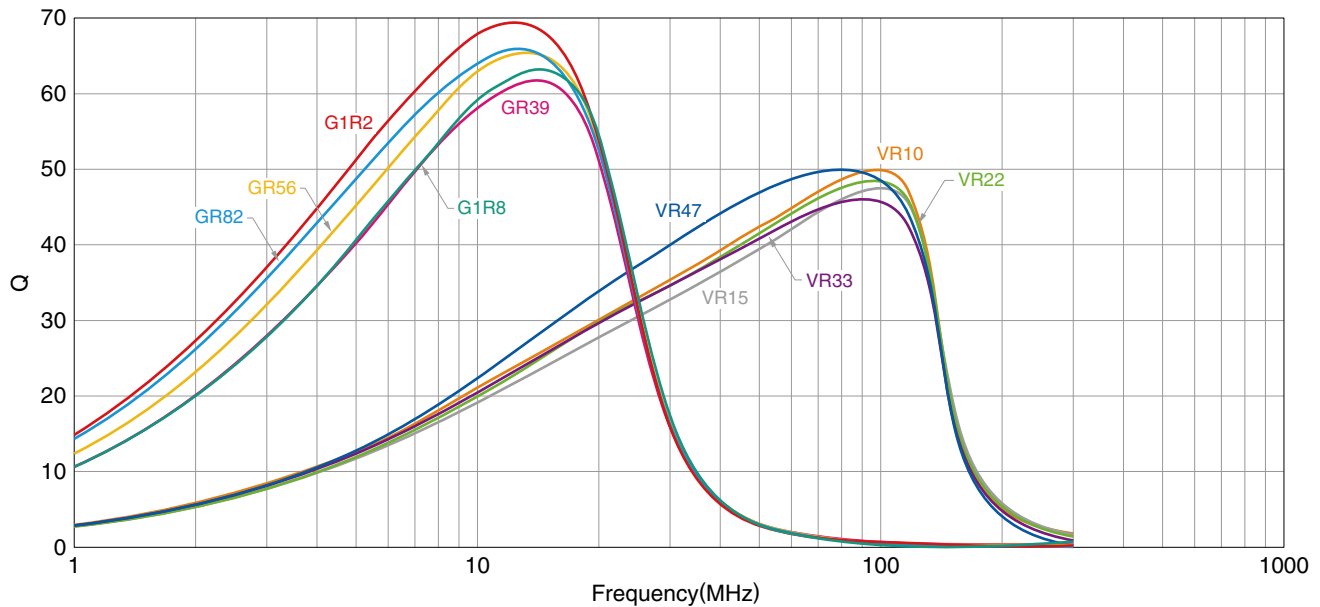


Measurement equipment

| Product No. | Manufacturer |
|---------------|-----------------------|
| E4991A+16192A | Keysight Technologies |

* Equivalent measurement equipment may be used.


MLF1005 type

SHAPE & DIMENSIONS

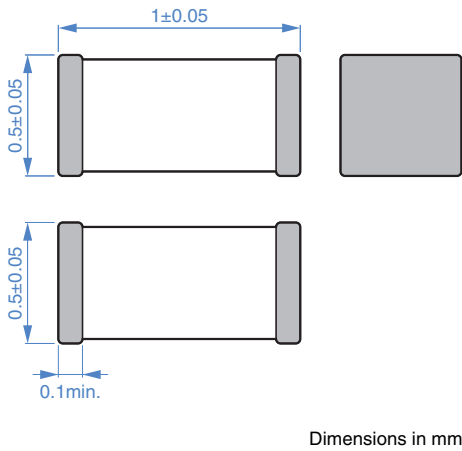


PACKAGING STYLE


REEL DIMENSIONS

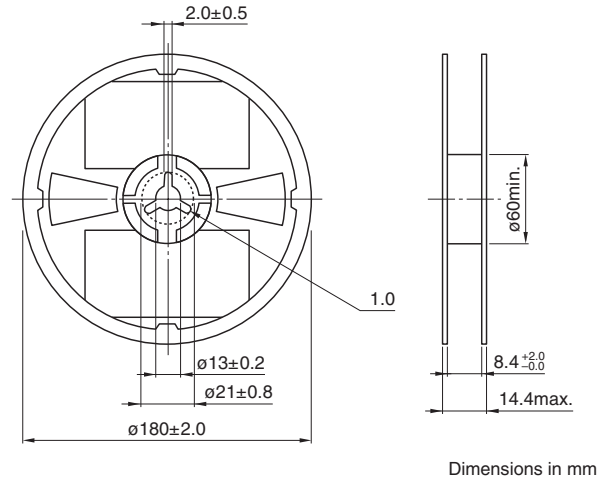

RECOMMENDED LAND PATTERN





TAPE DIMENSIONS

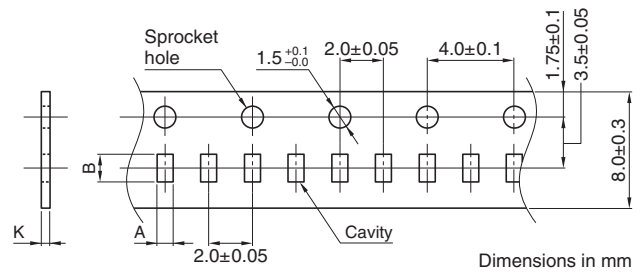

| Type | A | B | K |
|---------|----------|----------|----------|
| MLF1005 | 0.65±0.1 | 1.15±0.1 | 0.8 max. |

RECOMMENDED REFLOW PROFILE

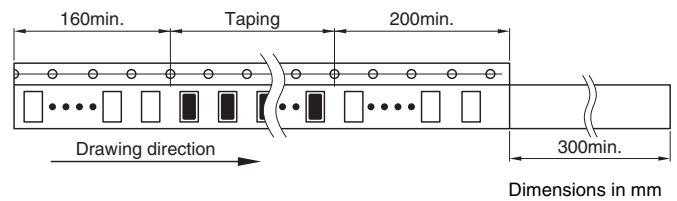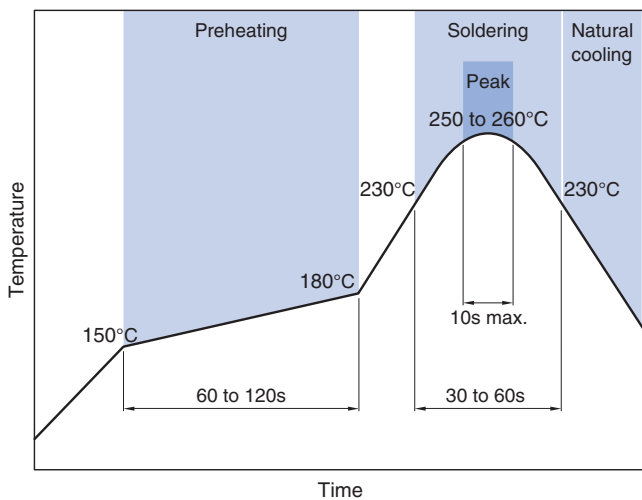

PACKAGE QUANTITY

| | |
|------------------|----------------|
| Package quantity | 10000 pcs/reel |
|------------------|----------------|

TEMPERATURE RANGE, INDIVIDUAL WEIGHT

| Operating temperature range | Storage temperature range* | Individual weight |
|-----------------------------|----------------------------|-------------------|
| -55 to +125 °C | -55 to +125 °C | 1.2 mg |

* The storage temperature range is for after the assembly.

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

REMINDERS

- The storage period is less than 12 months. Be sure to follow the storage conditions (temperature: 5 to 40°C, humidity: 10 to 75% RH or less).
If the storage period elapses, the soldering of the terminal electrodes may deteriorate.
- Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
- Before soldering, be sure to preheat components.
The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.
If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Carefully lay out the coil for the circuit board design of the non-magnetic shield type.
A malfunction may occur due to magnetic interference.
- Use a wrist band to discharge static electricity in your body through the grounding wire.
- Do not expose the products to magnets or magnetic fields.
- Do not use for a purpose outside of the contents regulated in the delivery specifications.
- The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.
The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.
If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.

- (1) Aerospace/aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.