

# MMZ2012S800ATD25 Datasheet

[www.digi-electronics.com](http://www.digi-electronics.com)



<https://www.DiGi-Electronics.com>

|                              |   |
|------------------------------|---|
| DiGi Electronics Part Number | MMZ2012S800ATD25-DG   |
| Manufacturer                 | <a href="#">TDK Corporation</a>                                     |
| Manufacturer Product Number  | MMZ2012S800ATD25  |
| Description                  | FERRITE BEAD 80 OHM 0805 1LN  |
| Detailed Description         | 80 Ohms 1 Signal Line Ferrite Bead 0805 (2012 Metric) 800mA 100mOhm |

This model MMZ2012S800ATD25 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

MMZ2012S800ATD25

Series:

MMZ

Filter Type:

Signal Line

Impedance @ Frequency:

80 Ohms @ 100 MHz

DC Resistance (DCR) (Max):

100mOhm

Operating Temperature:

-55°C ~ 125°C

Mounting Type:

Surface Mount

Size / Dimension:

0.079" L x 0.049" W (2.00mm x 1.25mm)

Manufacturer:

TDK Corporation

Product Status:

Last Time Buy

Number of Lines:

1

Current Rating (Max):

800mA

Ratings:

AEC-Q200

Package / Case:

0805 (2012 Metric)

Height (Max):

0.041" (1.05mm)

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8548.00.0000

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

## Chip beads

For general signal line

MMZ series (for automotive)



AEC-Q200

## MMZ2012 type



## FEATURES

- Noise reduction solution for general signal line.
- Various frequency characteristics with 4 materials of different features for countermeasures against everything from general signals to high-speed signals.
- Operating temperature range: -55 to +125°C

## APPLICATION

- Various ECUs, powertrains, body controls, and car multimedia (telematics).

## PART NUMBER CONSTRUCTION

|             |                                      |               |                                     |                     |                 |               |
|-------------|--------------------------------------|---------------|-------------------------------------|---------------------|-----------------|---------------|
| MMZ         | 2012                                 | R             | 150                                 | A                   | T               | D25           |
| Series name | LxWxT dimensions<br>2.0x1.25x0.85 mm | Material name | Impedance<br>( $\Omega$ ) at 100MHz | Characteristic type | Packaging style | Internal code |


## CHARACTERISTICS SPECIFICATION TABLE

| Impedance<br>[100MHz]<br>( $\Omega$ ) | Tolerance | DC resistance<br>( $\Omega$ )max. | Rated current<br>(mA)max. | Part No.                         |
|---------------------------------------|-----------|-----------------------------------|---------------------------|----------------------------------|
| 15                                    | ±25%      | 0.05                              | 1500                      | <a href="#">MMZ2012R150ATD25</a> |
| 30                                    | ±25%      | 0.05                              | 1500                      | <a href="#">MMZ2012R300ATD25</a> |
| 60                                    | ±25%      | 0.10                              | 1000                      | <a href="#">MMZ2012R600ATD25</a> |
| 120                                   | ±25%      | 0.12                              | 800                       | <a href="#">MMZ2012R121ATD25</a> |
| 300                                   | ±25%      | 0.15                              | 600                       | <a href="#">MMZ2012R301ATD25</a> |
| 600                                   | ±25%      | 0.20                              | 500                       | <a href="#">MMZ2012R601ATD25</a> |
| 1000                                  | ±25%      | 0.30                              | 500                       | <a href="#">MMZ2012R102ATD25</a> |
| 40                                    | ±25%      | 0.10                              | 1000                      | <a href="#">MMZ2012S400ATD25</a> |
| 80                                    | ±25%      | 0.10                              | 800                       | <a href="#">MMZ2012S800ATD25</a> |
| 120                                   | ±25%      | 0.15                              | 800                       | <a href="#">MMZ2012S121ATD25</a> |
| 150                                   | ±25%      | 0.15                              | 700                       | <a href="#">MMZ2012S151ATD25</a> |
| 180                                   | ±25%      | 0.15                              | 600                       | <a href="#">MMZ2012S181ATD25</a> |
| 300                                   | ±25%      | 0.20                              | 600                       | <a href="#">MMZ2012S301ATD25</a> |
| 600                                   | ±25%      | 0.30                              | 500                       | <a href="#">MMZ2012S601ATD25</a> |
| 1000                                  | ±25%      | 0.35                              | 500                       | <a href="#">MMZ2012S102ATD25</a> |

## Measurement equipment

| Measurement item | Product No.   | Manufacturer          |
|------------------|---------------|-----------------------|
| Impedance        | E4991A+16192A | Keysight Technologies |
| DC resistance    | Type-7556     | Yokogawa              |

\* Equivalent measurement equipment may be used.



# MMZ2012 type

## CHARACTERISTICS SPECIFICATION TABLE

| Impedance<br>[100MHz]<br>( $\Omega$ ) |           | DC resistance<br>( $\Omega$ )max. | Rated current<br>(mA)max. | Part No.                         |
|---------------------------------------|-----------|-----------------------------------|---------------------------|----------------------------------|
|                                       | Tolerance |                                   |                           |                                  |
| 15                                    | ±25%      | 0.05                              | 1500                      | <a href="#">MMZ2012Y150BTD25</a> |
| 30                                    | ±25%      | 0.05                              | 1500                      | <a href="#">MMZ2012Y300BTD25</a> |
| 60                                    | ±25%      | 0.10                              | 1000                      | <a href="#">MMZ2012Y600BTD25</a> |
| 120                                   | ±25%      | 0.12                              | 800                       | <a href="#">MMZ2012Y121BTD25</a> |
| 300                                   | ±25%      | 0.15                              | 600                       | <a href="#">MMZ2012Y301BTD25</a> |
| 600                                   | ±25%      | 0.20                              | 500                       | <a href="#">MMZ2012Y601BTD25</a> |
| 1000                                  | ±25%      | 0.30                              | 500                       | <a href="#">MMZ2012Y102BTD25</a> |
| 1500                                  | ±25%      | 0.40                              | 500                       | <a href="#">MMZ2012Y152BTD25</a> |
| 2000                                  | ±25%      | 0.50                              | 400                       | <a href="#">MMZ2012Y202BTD25</a> |
| 80                                    | ±25%      | 0.30                              | 500                       | <a href="#">MMZ2012D800BTD25</a> |
| 120                                   | ±25%      | 0.30                              | 500                       | <a href="#">MMZ2012D121BTD25</a> |
| 300                                   | ±25%      | 0.50                              | 400                       | <a href="#">MMZ2012D301BTD25</a> |

### Measurement equipment


| Measurement item | Product No.   | Manufacturer          |
|------------------|---------------|-----------------------|
| Impedance        | E4991A+16192A | Keysight Technologies |
| DC resistance    | Type-7556     | Yokogawa              |

\* Equivalent measurement equipment may be used.


# MMZ2012 type

## Z VS. FREQUENCY CHARACTERISTICS (BY SERIES)


### MMZ2012R series

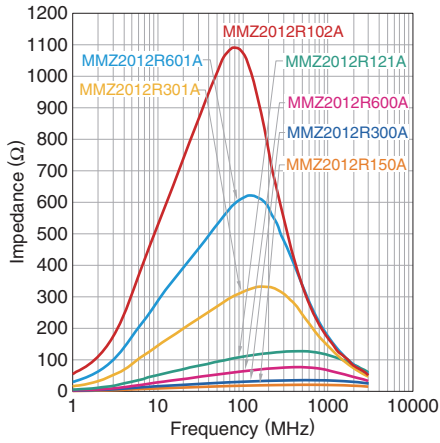


### MMZ2012S series

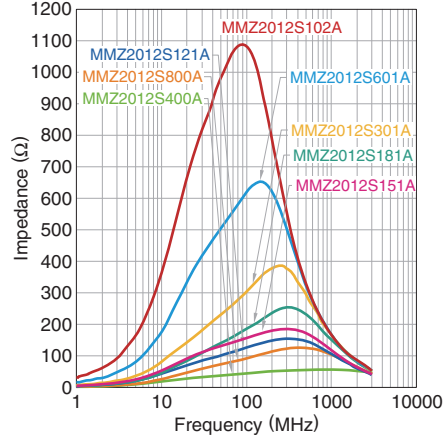

### MMZ2012Y series

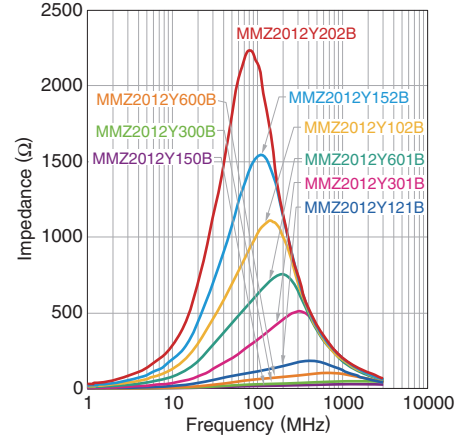

### MMZ2012D series

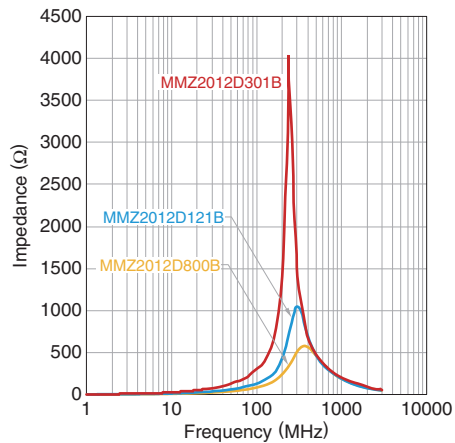


# MMZ2012 type

## Z, X, R VS. FREQUENCY CHARACTERISTICS


MMZ2012R150ATD25



MMZ2012R300ATD25

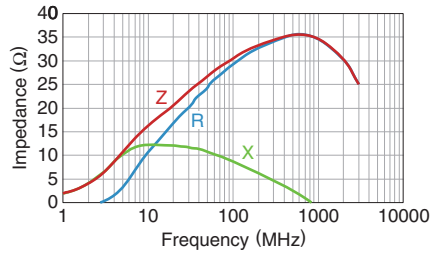


MMZ2012R600ATD25

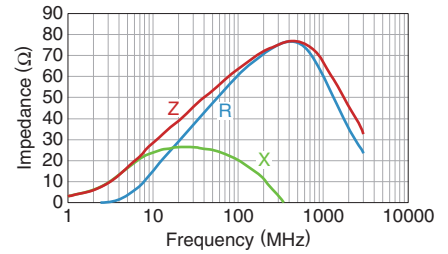


MMZ2012R121ATD25



MMZ2012R301ATD25

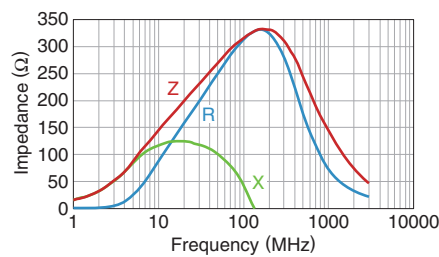


MMZ2012R601ATD25

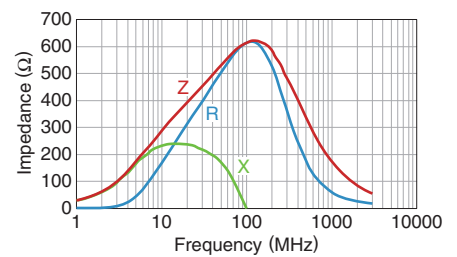


MMZ2012R102ATD25




MMZ2012S400ATD25

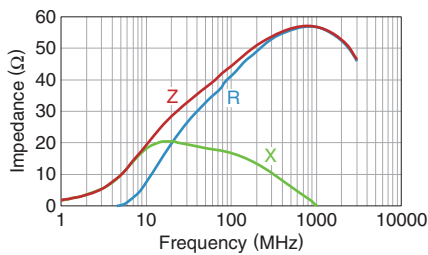


MMZ2012S800ATD25

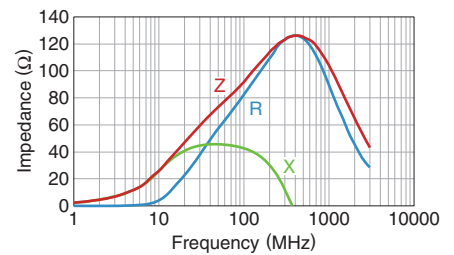


MMZ2012S121ATD25

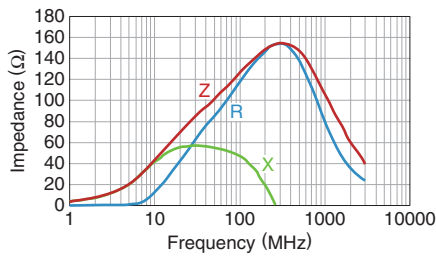


MMZ2012S151ATD25

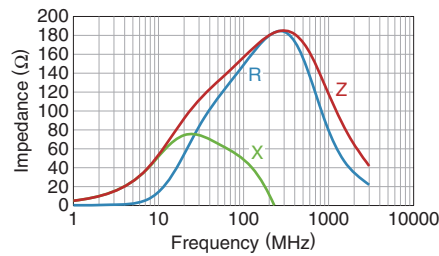


MMZ2012S181ATD25

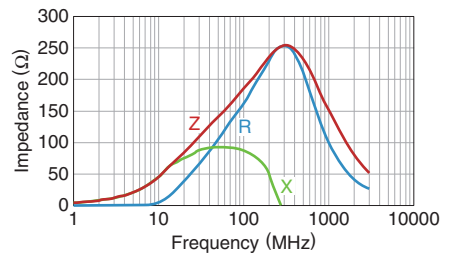


MMZ2012S301ATD25

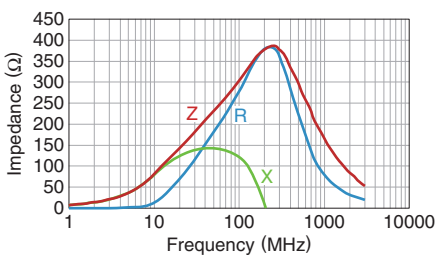

MMZ2012S601ATD25

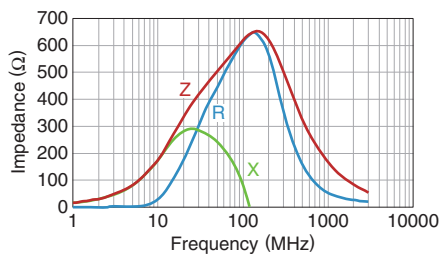


MMZ2012S102ATD25

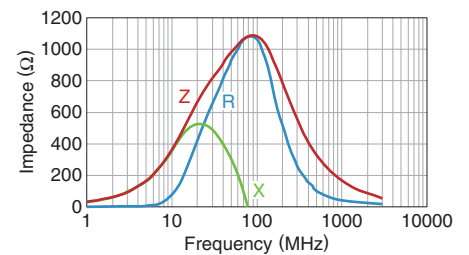


# MMZ2012 type

## Z, X, R VS. FREQUENCY CHARACTERISTICS


MMZ2012Y150BTD25

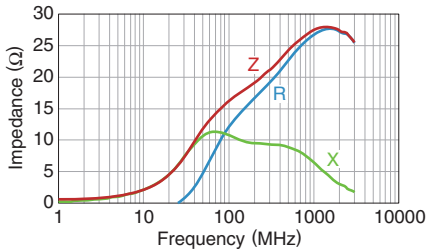


MMZ2012Y300BTD25

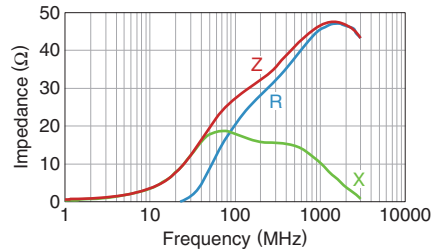


MMZ2012Y600BTD25

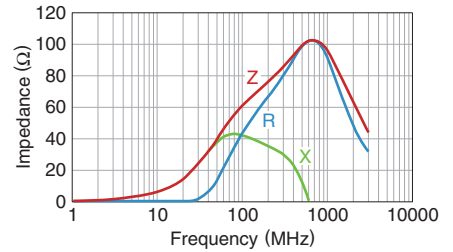


MMZ2012Y121BTD25

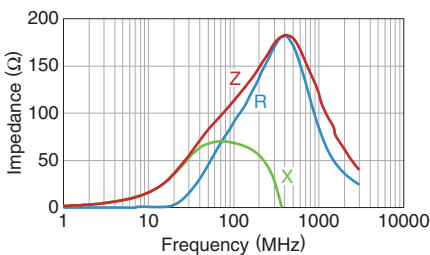


MMZ2012Y301BTD25

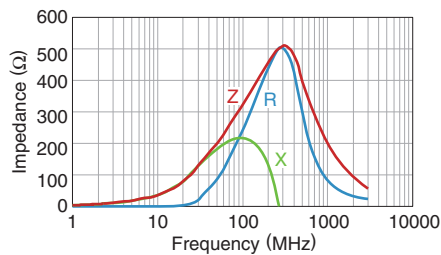


MMZ2012Y601BTD25

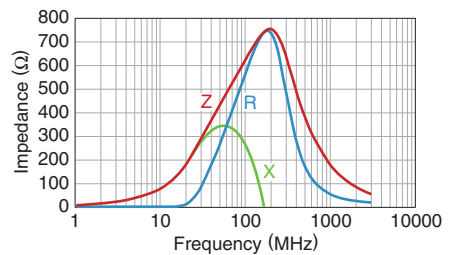


MMZ2012Y102BTD25

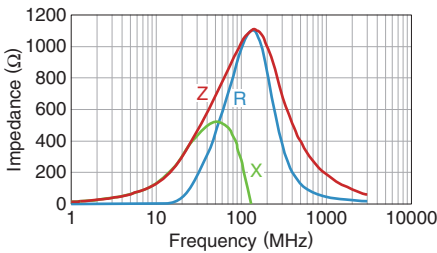


MMZ2012Y152BTD25

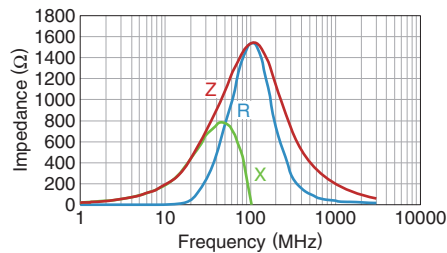


MMZ2012Y202BTD25

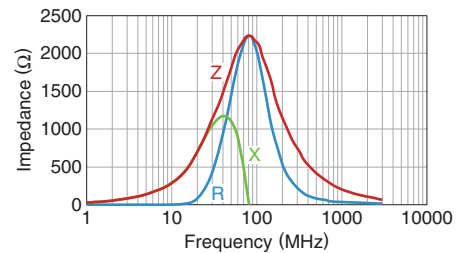


MMZ2012D800BTD25

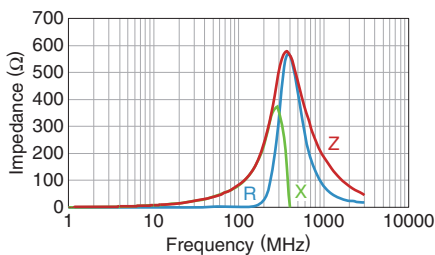

MMZ2012D121BTD25

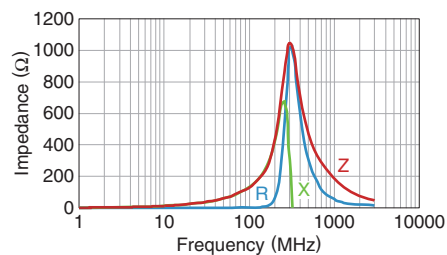

MMZ2012D301BTD25

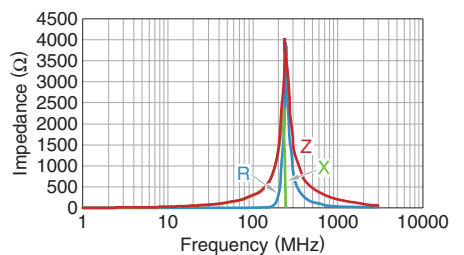



## REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

### SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

#### REMINDERS

- The storage period is within 12 months. Be sure to follow the storage conditions (temperature: 5 to 40°C, humidity: 10 to 75% RH or less).  
If the storage period elapses, the soldering of the terminal electrodes may deteriorate.
- Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
- Before soldering, be sure to preheat components.  
The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.  
If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Carefully lay out the coil for the circuit board design of the non-magnetic shield type.  
A malfunction may occur due to magnetic interference.
- Use a wrist band to discharge static electricity in your body through the grounding wire.
- Do not expose the products to magnets or magnetic fields.
- Do not use for a purpose outside of the contents regulated in the delivery specifications.
- The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.  
The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.  
If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.

- (1) Aerospace/aviation equipment
- (2) Transportation equipment (electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.