


HSA5022RJ Datasheet

www.digi-electronics.com



HSA5022RJ

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	HSA5022RJ-DG
Manufacturer	TE Connectivity Passive Product
Manufacturer Product Number	HSA5022RJ
Description	RES CHAS MNT 22 OHM 5% 50W
Detailed Description	22 Ohms ±5% 50W Wirewound Chassis Mount Resistor



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

HSA5022RJ

Series:

HS, CGS

Resistance:

22 Ohms

Power (Watts):

50W

Temperature Coefficient:

±50ppm/°C

Features:

-

Mounting Feature:

Flanges

Height - Seated (Max):

0.669" (17.00mm)

Package / Case:

Axial, Box

Manufacturer:

TE Connectivity Passive Product

Product Status:

Active

Tolerance:

±5%

Composition:

Wirewound

Operating Temperature:

-55°C ~ 200°C

Coating, Housing Type:

Aluminum

Size / Dimension:

2.008" L x 1.181" W (51.00mm x 30.00mm)

Lead Style:

Solder Lugs

Failure Rate:

-

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8533.29.0000

Moisture Sensitivity Level (MSL):

Not Applicable

ECCN:


EAR99

ALUMINIUM HOUSED POWER RESISTORS

TYPE HS SERIES

INTRODUCTION

TE Connectivity (TE) is one of the leading European suppliers of standard and custom designed aluminium housed resistors for general-purpose use, power supplies, power generation and the traction and drives industries. The HS Series product offering, a range of extremely stable, high-quality wire wound resistors are made from quality materials for optimum reliability and stability, capable of dissipating high power in a limited space with relatively low surface temperature. The aluminium housing in these resistors help rapidly dissipate power to a specified heat sink.

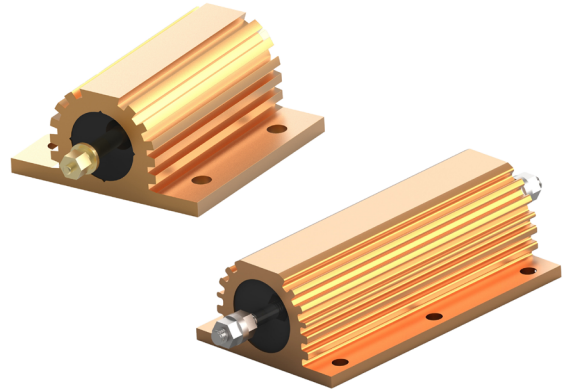

This latest revision of the datasheet introduces two new additions to the series: the HSCS stud terminal type HSC75, 100, and 150, and the HSHC type with power ratings from 350W to 500W, giving this series the widest range of power ratings currently on offer. TE is happy to advise on the use of these resistors for pulse applications and high voltage use. On request, TE can modify and test these resistors specifically to conform to relevant international, military or customer specifications. Low ohmic values, alternative mountings, and alternative termination types are also available on request.

FEATURES

- Established product with proven reliability leading the way with over 50 years of design and manufacturing experience.
- 5 Watts to 500 Watts: Largest range on the market.
- Versatile product bench mark in wide range of industries.
- Custom designs, windings, terminations, mountings available on request.
- Low resistance, low inductance and higher voltage versions available specialising the standard.

APPLICATIONS

- Braking resistor
- Balancing resistor
- Capacitor charging & discharging
- Crowbar
- Filter
- Electrical machinery general use

CHARACTERISTICS - ELECTRICAL

HSA & HSC - 5 Watts to 75 Watts

	HSA5	HSA10	HSA25	HSA50	HSC75
Dissipation @ 25°C with heatsink (Watts):	10	16	25	50	75
Without heatsink (Watts):	5.5	8	12.5	20	45
Ohmic value minimum (Ohms):	R01	R01	R01	R01	R05
Ohmic value maximum (Ohms):	10K	15K	36K	100K	50K
Operating temperature	-55-200°C				
Maximum working voltage (DC or AC rms) Volts:	150	250	500	1250	1400
Isolation voltage (DC or AC pk) Volts:	1400	1400	2500	2500	3500
Dielectric strength (AC Peak) Volts:	1400	1400	2500	2500	5000
Stability (resistance change, 1000 hours) (%):	1	1	1	1	2
Standard heatsink - area (mm ²):	41500	41500	53500	53500	99500
Thickness (mm):	1	1	1	1	3
Number of mounting holes:	2 hole	2 hole	2 hole	2 hole	4 hole

Aluminium Housed Power Resistors

Type HS Series

HSC - 100 Watts to 300 Watts

	HSC100	HSC150	HSC200	HSC250	HSC300
Dissipation @ 25°C with heatsink (Watts):	100	150	200	250	300
Without heatsink:	50	55	50	60	75
Ohmic value minimum (Ohms):	R05	R10	R10	R10	R10
Maximum (Ohms):	100K	100K	50K	68K	82K
Operating temperature	-55-200°C				
Maximum working voltage (DC or AC rms) Volts:	1900	2500	1900	2200	2500
Isolation voltage (DC or AC pk) Volts:	3500	3500	3600	3600	3600
Dielectric strength (AC Peak) Volts:	5000	5000	5600	5600	5600
Stability (resistance change, 1000 hours) (%):	2	2	3	3	3
Standard heatsink - area (mm ²):	99500	99500	375000	476500	578000
Thickness (mm):	3	3	3	3	3
Number of mounting holes:	4 hole	4 hole	6 hole	6 hole	6 hole

HS HC - 350 Watts to 500 Watts

	HS HC350	HS HC400	HS HC450	HS HC500
Dissipation @ 25°C with heatsink (Watts):	350	400	450	500
Without heatsink (Watts):	85	100	110	125
Ohmic value minimum (Ohms):	1R0	1R0	1R0	1R0
Maximum (Ohms):	100K	100K	100K	100K
Operating temperature	-55-200°C			
Maximum working voltage (DC or AC rms) Volts:	2500	2500	2500	2500
Isolation voltage (DC or AC pk) Volts:	3600	3600	3600	3600
Dielectric strength (AC Peak) Volts:	5000	5000	5000	5000
Stability (resistance change, 1000 hours) (%):	3	3	3	3
Standard heatsink - area (mm ²):	578000	578000	578000	578000
Thickness (mm):	3	3	3	3
Number of mounting holes:	6 hole	6 hole	6 hole	6 hole

Long term stability	For improvements in long-term stability, resistors must be derated as follows: for 50% of stated ΔR maximum dissipation must not exceed 70% of rating; for 25% of stated ΔR maximum, dissipation must not exceed 50% of rating.
Insulation resistance	Dry: 10,000M Ω minimum. After moisture test: 1000M Ω minimum
Heat dissipation	Although the use of proprietary heat sinks with lower thermal resistance is acceptable, up rating is not recommended. The use of proprietary heat sink compound to improve thermal conductivity is recommended for optimum performance of all sizes but essential for higher power ratings (200W and higher)
Resistance tolerance	$\pm 5\%$ Standard. Other options on request.
Specification	Temperature coefficient of resistance: $\leq 100R$, $\pm 50\text{ppm}/^\circ\text{C}$; $> 100R$, $\pm 25\text{ppm}/^\circ\text{C}$ Tolerance, 5% standard: 10%, 3%, 2%, 0.5% & 0.25% available Tolerance for values below R10, 10% standard
Shelf life	24 Months when stored in original packaging away from chemical pollution


Aluminium Housed Power Resistors

Type HS Series


DERATING CURVE

N.B. The graphs plot power against allowable heatsink temperature range and not the temperature the heatsink will rise to under this power condition, nor the ambient temperature.


HSA5 - 50

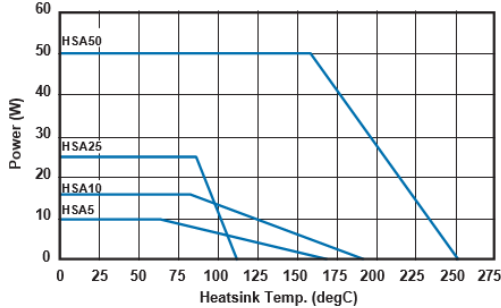


HSC75 - 300

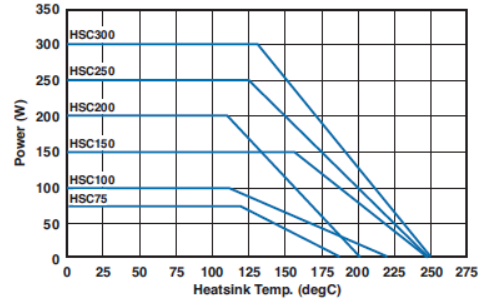


Pulse Energy HSA5 to HSC75 (pulse length 200ms)

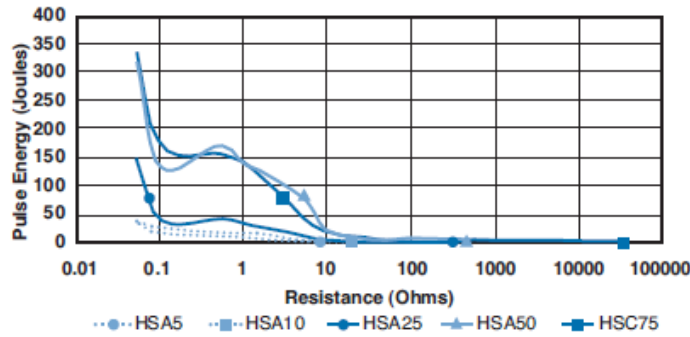


Pulse Energy HSC100 to HSC300 (pulse length 200ms)

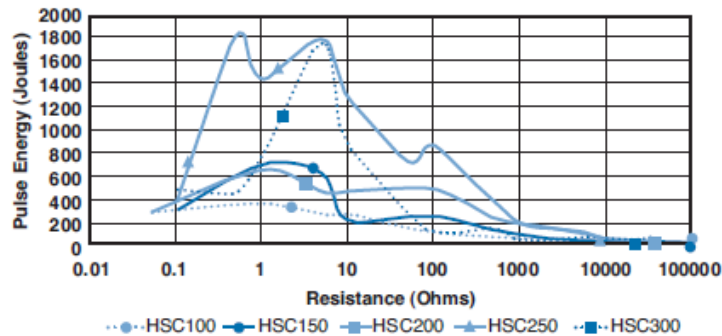

Power Overload

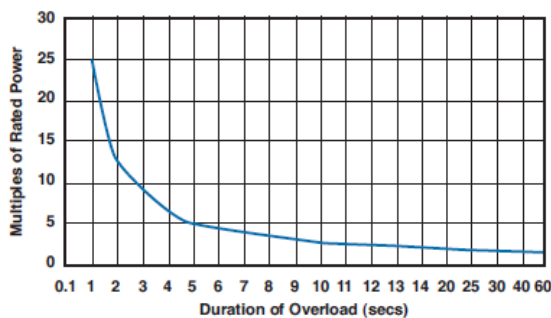

Surface Temperature Rise

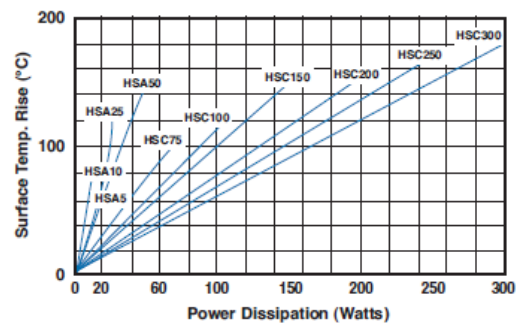

This graph indicates the amount that the rated power (at 20°C) of the standard HS series resistor may be increased for overloads of 100ms to 60s


For resistor mounted on standard heatsink, related to power dissipation

Aluminium Housed Power Resistors


Type HS Series

PRODUCT SPECIFICATIONS (Unit:mm)


HSA5 - HSC150 Standard



HSC75S - HSC150S




HSC200 - HSC300 & HSHC350 - HSHC500

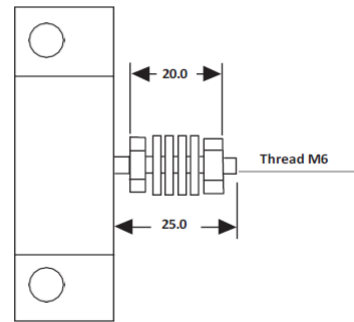

Standard Type	L
HSA5, 10	7
HSA25, 50	10
HSC75, 100, 150	8


DIMENSIONS (Unit:mm)

HSA5 - HSA50

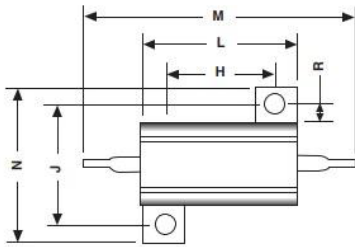


HSA5 - HSA10 : Mounting Hole 2 x 2.4mm
HSA25 - HSA50 : Mounting Hole 2 x 3.3mm

HSC75 - HSC150

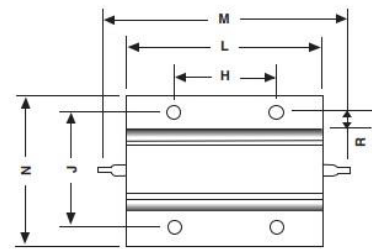


HSC75 - HSC150 : Mounting Hole 4 x 4.4mm

HSC75S - HSC150S

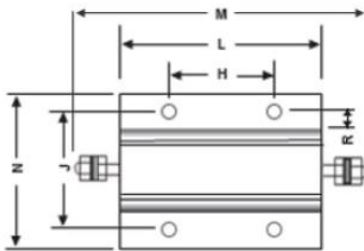

HSC75 - HSC150 : Mounting Hole 4 x 4.4mm

HSC300 - HSC300, HSHC350 - HSHC500

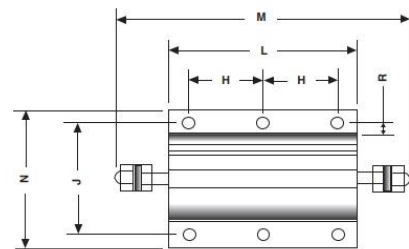


HSC200 - HSC250 : Mounting Hole 2 x 2.4mm
HSC300, HSHC350 - HSHC500 : Mounting Hole 2 x 3.3mm

Aluminium Housed Power Resistors

Type HS Series

DIMENSIONS (continued)

End Elevation (all models)

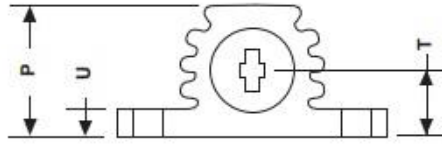

Type	H ± 0.3	J ± 0.3	L maximum	M maximum	N maximum	P maximum	R minimum	T ± 0.5	U maximum
HSA5	11.3	12.4	17.0	30.0	17.0	9.0	1.9	4.3	2.5
HSA10	14.3	15.9	21.0	36.5	21.0	11.0	1.9	5.2	3.2
HSA25	18.3	19.8	29.0	51.0	28.0	15.0	2.8	7.2	3.2
HSA50	39.7	21.4	51.0	72.5	30.0	17.0	2.8	8.2	3.2
HSC75	29.0	37.0	49.0	71.0	48.0	24.0	5.0	11.5	3.5
HSC100	35.0	37.0	66.0	87.5	48.0	24.0	5.0	11.5	3.5
HSC150	58.0	37.0	98.0	122.0	48.0	24.0	5.0	11.5	3.5
HSC200	35.0	57.2	90.0	143.0	73.0	42.0	5.6	20.25	5.3
HSC250	44.5	57.2	109.0	163.0	73.0	42.0	5.6	20.25	5.3
HSC300	52.0	59.0	128.0	180.0	73.0	42.0	5.6	20.25	5.3
HSC75S	29.0	37.0	49.0	78.0	48.0	24.0	5.0	11.5	3.5
HSC100S	35.0	37.0	66.0	94.0	48.0	24.0	5.0	11.5	3.5
HSC150S	58.0	37.0	98.0	127.0	48.0	24.0	5.0	11.5	3.5
HS HC350	61.50	59.0	147	196.0	73	42.0	5.6	20.25	5.3
HS HC400	71.0	59.0	166	215.0	73	42.0	5.6	20.25	5.3
HS HC450	80.5	59.0	185	234.0	73	42.0	5.6	20.25	5.3
HS HC500	90.0	59.0	204	253.0	73	42.0	5.6	20.25	5.3

ORDERING INFORMATION

Part Number				
HS	A	50	680R	J

Common part

HS	Standard
HSH	High power
NHS	Low inductance

Mounting style

A	Single opposing mounting feet
B	Flange one side
C	Flange two sides

Power rating

10 Watt	HSA5
16 Watt	HSA10
25 Watt	HSA25
50 Watt	HSA50
75 Watt	HSA75, etc,

Tolerance

F	1%
G	2%
E	3%
J	5%
K	10%

Resistance Value

R10	0.1 ohm (1000 mille ohms)
1R0	1 ohm (1000 mille ohms)
1K0	1K (1000 ohms)

Terminal

	Standard
S	Screw

te.com

©2024 TE Connectivity Ltd. Family of companies. All Rights Reserved.

TE Connectivity, TE connectivity (logo) and Every Connection Counts are trademarks owned or licensed by the TE Connectivity family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity assumes only those obligations set forth in the terms and conditions for this product and shall in no event be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

1773035 Rev. E 04/24 ED

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.