


# ALSR108K500FE12 Datasheet

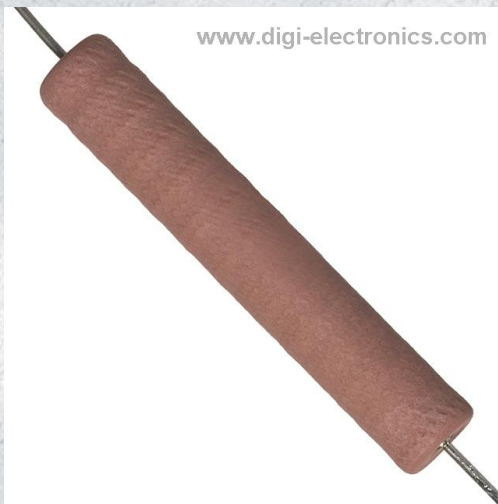

www.digi-electronics.com

https://www.DiGi-Electronics.com

|                              |   |
|------------------------------|---|
| DiGi Electronics Part Number | ALSR108K500FE12-DG  |
| Manufacturer                 | <a href="#">Vishay Dale</a>   |
| Manufacturer Product Number  | ALSR108K500FE12   |
| Description                  | RES 8.5K OHM 7W 1% AXIAL  |
| Detailed Description         | 8.5 kOhms ±1% 7W Through Hole Resistor Axial Moisture Resistant Wirewound |

This model ALSR108K500FE12 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

ALSR108K500FE12

Series:

ALSR

Resistance:

8.5 kOhms

Power (Watts):

7W

Features:

Moisture Resistant

Operating Temperature:

-65°C ~ 250°C

Supplier Device Package:

Axial

Height - Seated (Max):

-

Failure Rate:

-

Manufacturer:

Vishay Dale

Product Status:

Active

Tolerance:

±1%

Composition:

Wirewound

Temperature Coefficient:

±30ppm/°C

Package / Case:

Axial

Size / Dimension:

0.312" Dia x 1.730" L (7.92mm x 43.94mm)

Number of Terminations:

2

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

ECCN:

EAR99

Moisture Sensitivity Level (MSL):


1 (Unlimited)

HTSUS:

8533.21.0080



## Wirewound Resistors, Commercial Power, Silicone Coated, Axial Lead

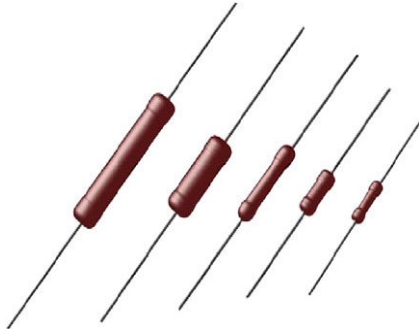

### FEATURES

- High temperature coating (> 350 °C)
- All welded construction
- Available in vitreous coating as ALVR
- Available in non-inductive styles with Ayrton-Perry winding for lowest reactive components, special "NI"
- For non-inductive models, divide maximum resistance values by two
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)




| STANDARD ELECTRICAL SPECIFICATIONS |                  |  |  |                       |                               |                       |
|------------------------------------|------------------|--|--|-----------------------|-------------------------------|-----------------------|
| GLOBAL MODEL                       | HISTORICAL MODEL | POWER RATING <sup>(1)</sup><br><i>P</i> <sub>25 °C W</sub><br>CHARACTERISTIC U +250 °C | POWER RATING <sup>(1)</sup><br><i>P</i> <sub>25 °C W</sub><br>CHARACTERISTIC V +350 °C | RESISTANCE RANGE<br>Ω | TOLERANCE <sup>(2)</sup><br>% | WEIGHT (typical)<br>g |
| ALSR01                             | ALSR-1           | 1  | -  | 0.10 to 6.37K         | 1, 3, 5, 10                   | 0.27                  |
| ALVR01                             | ALVR-1           | 1  | -  | 0.10 to 6.37K         | 1, 3, 5, 10                   | 0.27                  |
| ALSR03                             | ALSR-3           | 3  | -  | 0.10 to 12K           | 1, 3, 5, 10                   | 0.68                  |
| ALVR03                             | ALVR-3           | 3  | -  | 0.10 to 12K           | 1, 3, 5, 10                   | 0.68                  |
| ALSR5A                             | ALSR-5A          | 4  | 5  | 0.10 to 40.3K         | 1, 3, 5, 10                   | 2.1                   |
| ALVR5A                             | ALVR-5A          | 4  | 5  | 0.10 to 40.3K         | 1, 3, 5, 10                   | 2.1                   |
| ALSR05                             | ALSR-5           | 5  | 7  | 0.10 to 58.5K         | 1, 3, 5, 10                   | 3.2                   |
| ALVR05                             | ALVR-5           | 5  | 7  | 0.10 to 58.5K         | 1, 3, 5, 10                   | 3.2                   |
| ALSR10                             | ALSR-10          | 7  | 10   | 0.10 to 92K           | 1, 3, 5, 10                   | 4.9                   |
| ALVR10                             | ALVR-10          | 7  | 10   | 0.10 to 92K           | 1, 3, 5, 10                   | 4.9                   |

### Notes

- (1) Vishay Huntington ALSR / ALVR models have two power ratings depending on operation temperature and stability requirements. Models not available for characteristic V are: ALSR01, ALVR01, ALSR03, and ALVR03
- (2) Other tolerances may be available, contact factory

| GLOBAL PART NUMBER INFORMATION   |  |   |   |  |
|--|--|---|---|--|
| Global Part Numbering Example: <b>ALSR0325R00FE12NI</b>                  |  |   |   |  |
| A  | L  | S   | R   | 0 3 2 5 R 0 0 F E 1 2 N I                                      |
| GLOBAL MODEL<br>(6 digits)   | VALUE<br>(5 digits)  | TOLERANCE<br>(1 digit)                                    | PACKAGING<br>(3 digits)   | SPECIAL<br>(up to 2 digits)                                    |
| (see Standard Electrical Specifications Global Model column for options) | R = decimal<br>K = thousand<br>1R500 = 1.5 Ω<br>1K500 = 1.5 kΩ | F = ± 1.0 %<br>H = ± 3.0 %<br>J = ± 5.0 %<br>K = ± 10.0 % | E07 = tape / reel<br>(ALSR5A / ALVR5A, ALSR05 / ALVR05)<br>E08 = tape / reel (ALSR01 / ALVR01)<br>E29 = tape / reel (ALSR10 / ALVR10)<br>E48 = tape / reel (ALSR03 / ALVR03)<br>E70 = tape / reel, 1K pieces<br>(smaller than ALSR05 / ALVR05)<br>E73 = tape / reel, 500 pieces<br>E12 = bulk, 100 pc boxes | (dash number) from 1 to 99 as applicable<br>NI = non-inductive |
| Historical Part Number Example: <b>ALSR-3-25-1 %-NI</b>                  |  |   |   |  |
| ALSR-3   | 25 Ω   | 1 %   | NI  |  |
| HISTORICAL MODEL   | RESISTANCE VALUE   | TOLERANCE   | SPECIAL   |  |


[www.vishay.com](http://www.vishay.com)
**ALSR, ALVR**  
 Vishay Huntington

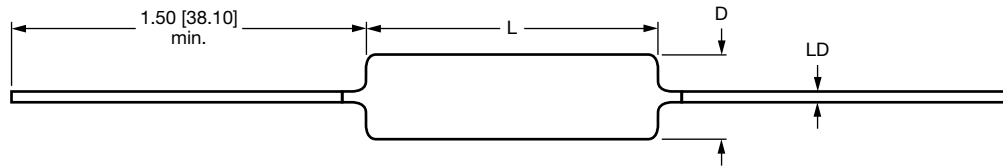**DIMENSIONS** in inches [millimeters]


| GLOBAL MODEL | DIMENSIONS in inches [millimeters] |                      |                       |
|--------------|------------------------------------|----------------------|-----------------------|
|              | L<br>± 0.032 [0.813]               | D<br>± 0.032 [0.813] | LD<br>± 0.002 [0.051] |
| ALSR01       | 0.406 [10.31]                      | 0.110 [2.79]         | 0.020 [0.508]         |
| ALVR01       | 0.406 [10.31]                      | 0.110 [2.79]         | 0.020 [0.508]         |
| ALSR03       | 0.500 [12.70]                      | 0.180 [4.57]         | 0.032 [0.813]         |
| ALVR03       | 0.500 [12.70]                      | 0.180 [4.57]         | 0.032 [0.813]         |
| ALSR5A       | 0.920 [23.37]                      | 0.200 [5.08]         | 0.032 [0.813]         |
| ALVR5A       | 0.920 [23.37]                      | 0.200 [5.08]         | 0.032 [0.813]         |
| ALSR05       | 0.875 [22.23]                      | 0.312 [7.92]         | 0.032 [0.813]         |
| ALVR05       | 0.875 [22.23]                      | 0.312 [7.92]         | 0.032 [0.813]         |
| ALSR10       | 1.730 [43.94]                      | 0.312 [7.92]         | 0.032 [0.813]         |
| ALVR10       | 1.730 [43.94]                      | 0.312 [7.92]         | 0.032 [0.813]         |

**MATERIAL SPECIFICATIONS**

**Element:** copper-nickel alloy or nickel-chrome alloy, depending on resistance value


**Core:** ceramic: steatite or alumina, depending on physical size

**End Caps:** stainless steel

**Coating:** special high temperature silicone or special formula of “vitreous like appearance” coating on ALVR

**Terminals:** tinned copper clad steel

**Part Marking:** HEI, model, value, tolerance, date code

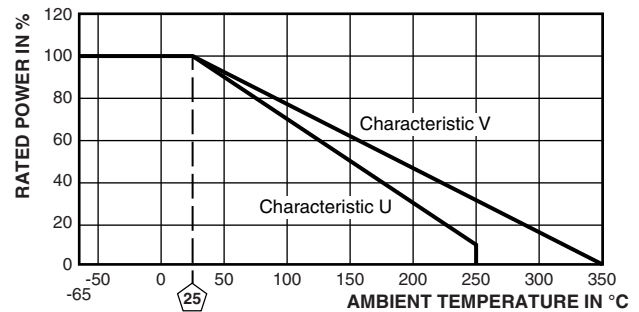**DERATING**


| TECHNICAL SPECIFICATIONS        |                 |  |
|---------------------------------|-----------------|--|
| PARAMETER                       | UNIT            | RESISTOR CHARACTERISTICS   |
| Temperature Coefficient         | ppm/°C          | ± 30 for 10 Ω and above; ± 50 for 1 Ω to 9.9 Ω; ± 90 for 0.5 Ω to 0.99 Ω |
| Terminal Strength               | lb              | 10 minimum   |
| Dielectric Withstanding Voltage | V <sub>AC</sub> | 500 for 1 W and 1000 for 3 W and above                                   |
| Operating Temperature Range     | °C              | Characteristic U = -65 to +250, characteristic V = -65 to +350           |
| Maximum Working Voltage         | V               | $(P \times R)^{1/2}$   |

| PERFORMANCE                     |  |                                |
|---------------------------------|--|--------------------------------|
| TEST                            | CONDITIONS OF TEST   | TEST LIMITS (CHARACTERISTIC V) |
| Thermal Shock                   | Rated power applied until thermally stable, then a minimum of 15 min at -55 °C           | ± (2.0 % + 0.05 Ω) > ΔR        |
| Short Time Overload             | 5x rated power (3 W and smaller), 10x rated power (4 W and larger) for 5 s               | ± (2.0 % + 0.05 Ω) > ΔR        |
| Dielectric Withstanding Voltage | 500 V <sub>RMS</sub> , 1 min for 1 W and 1000 V <sub>RMS</sub> , 1 min for 3 W and above | ± (0.1 % + 0.05 Ω) > ΔR        |
| Low Temperature Storage         | -65 °C for 24 h  | ± (2.0 % + 0.05 Ω) > ΔR        |
| High Temperature Exposure       | 250 h at U = +250 °C, V = +350 °C  | ± (4.0 % + 0.05 Ω) > ΔR        |
| Mechanical Shock                | MIL-STD-202 method 213, 100 g's for 6 ms, 10 shocks                                      | ± (0.2 % + 0.05 Ω) > ΔR        |
| Vibration                       | Frequency varied 10 Hz to 2000 Hz, 20 g peak, 2 directions 6 h each                      | ± (0.2 % + 0.05 Ω) > ΔR        |
| Load Life                       | 2000 h at rated power, +25 °C, 1.5 h “ON”, 0.5 h “OFF”                                   | ± (3.0 % + 0.05 Ω) > ΔR        |
| Moisture Resistance             | MIL-STD-202 method 106, 7b not applicable  | ± (2.0 % + 0.05 Ω) > ΔR        |



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.