

ISC1210EB3R3K Datasheet



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	ISC1210EB3R3K-DG
Manufacturer	Vishay Dale
Manufacturer Product Number	ISC1210EB3R3K
Description	FIXED IND 3.3UH 270MA 1.1OHM SMD
Detailed Description	3.3 μ H Shielded Drum Core, Wirewound Inductor 270 mA 1.1Ohm Max 1210 (3225 Metric)

This model ISC1210EB3R3K is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

ISC1210EB3R3K

Series:

ISC-1210

Type:

Drum Core, Wirewound

Inductance:

3.3 μ H

Current Rating (Amps):

270 mA

Shielding:

Shielded

Q @ Freq:

30 @ 7.96MHz

Ratings:

-

Inductance Frequency - Test:

7.96 MHz

Package / Case:

1210 (3225 Metric)

Size / Dimension:

0.126" L x 0.098" W (3.20mm x 2.49mm)

Manufacturer:

Vishay Dale

Product Status:

Active

Material - Core:

Iron Powder

Tolerance:

\pm 10%

Current - Saturation (Isat):

-

DC Resistance (DCR):

1.10hm Max

Frequency - Self Resonant:

60MHz

Operating Temperature:

-55°C ~ 125°C

Mounting Type:

Surface Mount

Supplier Device Package:

1210

Height - Seated (Max):

0.095" (2.41mm)

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8504.50.8000

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99



Wirewound, Surface-Mount, Molded, Shielded Inductors



STANDARD ELECTRICAL SPECIFICATIONS						
IND. (μH)	TOL.	TEST FREQ. (MHz)	Q MIN.	SRF MIN. (MHz)	DCR MAX. (Ω)	RATED DC CURRENT (mA) ⁽¹⁾
		L & Q				
0.010	± 20 %	50	50	1000	0.10	810
0.012	± 20 %	50	50	1000	0.11	750
0.015	± 20 %	50	50	1000	0.12	720
0.018	± 20 %	50	50	1000	0.13	690
0.022	± 20 %	50	45	1000	0.15	640
0.027	± 20 %	50	45	1000	0.17	610
0.033	± 20 %	50	45	1000	0.18	585
0.039	± 20 %	50	40	1000	0.24	530
0.047	± 20 %	50	40	1000	0.26	495
0.056	± 20 %	50	40	1000	0.28	485
0.068	± 20 %	50	40	1000	0.35	475
0.082	± 20 %	50	38	900	0.45	460
0.10	± 20 %	50	36	700	0.50	450
0.12	± 20 %	25.2	40	500	0.20	630
0.15	± 20 %	25.2	40	470	0.20	600
0.18	± 20 %	25.2	40	400	0.24	580
0.22	± 20 %	25.2	40	330	0.30	565
0.27	± 20 %	25.2	40	310	0.33	500
0.33	± 20 %	25.2	40	280	0.36	475
0.39	± 20 %	25.2	40	230	0.40	465
0.47	± 20 %	25.2	40	220	0.44	460
0.56	± 20 %	25.2	40	200	0.46	455
0.68	± 20 %	25.2	40	180	0.48	450
0.82	± 20 %	25.2	40	160	0.50	450
1.0	± 10 %	7.96	30	120	0.60	400
1.2	± 10 %	7.96	30	110	0.65	390
1.5	± 10 %	7.96	30	90.0	0.75	370
1.8	± 10 %	7.96	30	85.0	0.85	350
2.2	± 10 %	7.96	30	65.0	0.90	320
2.7	± 10 %	7.96	30	60.0	1.00	290
3.3	± 10 %	7.96	30	60.0	1.10	270
3.9	± 10 %	7.96	30	58.0	1.20	250
4.7	± 10 %	7.96	30	52.0	1.25	220
5.6	± 10 %	7.96	30	50.0	1.40	210
6.8	± 10 %	7.96	30	40.0	1.60	205
8.2	± 10 %	7.96	30	35.0	1.65	195
10.0	± 10 %	2.52	30	30.0	2.00	185
12.0	± 10 %	2.52	30	24.0	2.30	175
15.0	± 10 %	2.52	30	20.0	2.50	165
18.0	± 10 %	2.52	30	17.0	2.70	155
22.0	± 10 %	2.52	30	16.0	3.10	150
27.0	± 10 %	2.52	30	14.5	3.30	125
33.0	± 10 %	2.52	30	14.5	5.10	115
39.0	± 10 %	2.52	30	14.0	5.90	105
47.0	± 10 %	2.52	30	13.0	8.00	100
56.0	± 10 %	2.52	30	11.5	10.0	95
68.0	± 10 %	2.52	30	11.0	10.0	90
82.0	± 10 %	2.52	30	11.0	11.0	85
100.0	± 10 %	0.796	30	6.0	12.0	80

Note
⁽¹⁾ Rated DC current based on the maximum temperature rise, not to exceed 40 °C at +85 °C ambient

FEATURES

- Molded construction provides superior strength and moisture resistance
- Tape and reel packaging for automatic handling, 2000/reel, EIA-481
- Compatible with vapor phase, infrared, and wave soldering methods
- Shielded construction minimizes coupling to other components
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS COMPLIANT
HALOGEN FREE


ELECTRICAL SPECIFICATIONS

Inductance range: 0.01 μH to 100 μH
Special tolerances available upon request
Operating temperature: -55 °C to +125 °C
Coilform material: non-magnetic for 0.01 μH to 0.10 μH;; powdered iron for 0.12 μH to 100 μH

TEST EQUIPMENT

- H/P 4342A Q meter with Vishay Dale test fixture or equivalent
- H/P 4191A RF impedance analyzer (for SRF measurements)
- Wheatstone bridge

DIMENSIONS in inches [millimeters]

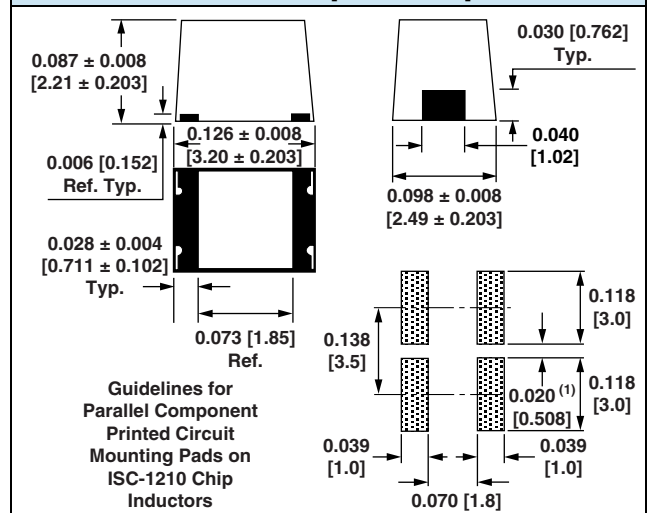

Note
⁽¹⁾ Recommended minimum spacing between components

PART MARKING

- Vishay Dale
- Inductance code
- Date code

DESCRIPTION				
ISC-1210	10 μH	± 10 %	ER	e3
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	PACKAGE CODE	JEDEC® LEAD (Pb)-FREE STANDARD
GLOBAL PART NUMBER				
I	S	C	1	2
PRODUCT FAMILY			SIZE	
			E	R
			PACKAGE CODE	
			1	0
			INDUCTANCE VALUE	
				K
			TOL.	



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.