


RN60C1001FRE6 Datasheet

www.digi-electronics.com

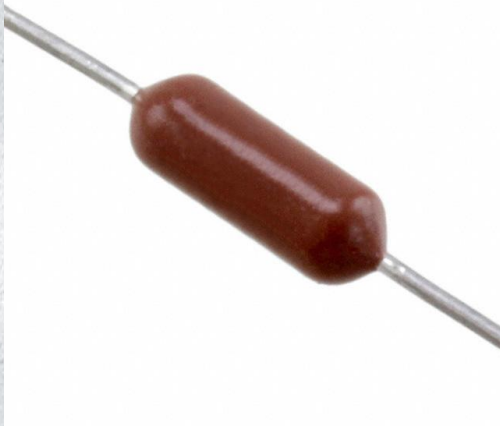

<https://www.DiGi-Electronics.com>

| | |
|------------------------------|--|
| DiGi Electronics Part Number | RN60C1001FRE6-DG |
| Manufacturer | Vishay Dale |
| Manufacturer Product Number | RN60C1001FRE6 |
| Description | RES 1K OHM 1/4W 1% AXIAL |
| Detailed Description | 1 kOhms ±1% 0.25W, 1/4W Through Hole Resistor Axial Flame Retardant Coating, Military, Moisture Resistant, Safety Metal Film |

This model RN60C1001FRE6 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

RN60C1001FRE6

Series:

Military, MIL-R-10509/1, RN60

Resistance:

1 kOhms

Power (Watts):

0.25W, 1/4W

Features:

Flame Retardant Coating, Military, Moisture Resistant, Safety

Operating Temperature:

-65°C ~ 175°C

Supplier Device Package:

Axial

Height - Seated (Max):

-

Failure Rate:

-

Manufacturer:

Vishay Dale

Product Status:

Active

Tolerance:

±1%

Composition:

Metal Film

Temperature Coefficient:

±50ppm/°C

Package / Case:

Axial

Size / Dimension:

0.145" Dia x 0.344" L (3.68mm x 8.74mm)

Number of Terminations:

2

Base Product Number:

RN60

Environmental & Export classification

RoHS Status:

RoHS non-compliant

REACH Status:

REACH Affected

HTSUS:

8533.21.0090

Moisture Sensitivity Level (MSL):

Not Applicable

ECCN:


EAR99


www.vishay.com

CMF (Military RN and RL)

Vishay Dale

Metal Film Resistors, Axial, Military, MIL-R-10509 Qualified, Precision, Type RN and MIL-PRF-22684 Qualified, Type RL

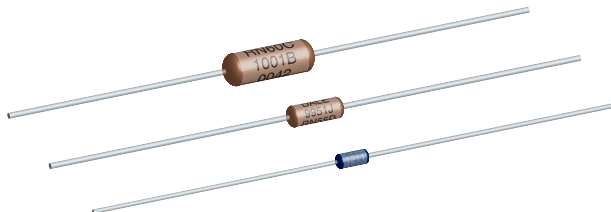

FEATURES

- Very low noise (-40 dB)
- Very low voltage coefficient (5 ppm/V)
- Controlled temperature coefficient
- Flame retardant epoxy coating
- Commercial alternatives to military styles are available with higher power ratings. See CMF Industrial data sheet: (www.vishay.com/doc?31018)

STANDARD ELECTRICAL SPECIFICATIONS

| GLOBAL MODEL | MIL STYLE | MIL SPEC. SHEET | POWER RATING $P_{70^{\circ}\text{C}}$ W | POWER RATING $P_{125^{\circ}\text{C}}$ W | MAX. WORKING VOLTAGE ⁽¹⁾ V | RESISTANCE RANGE | RESISTANCE RANGE | RESISTANCE RANGE | RESISTANCE RANGE | TOL. ⁽³⁾ ± % | DIELECTRIC STRENGTH V_{AC} |
|--------------|-----------|-----------------|---|--|--|---|--|--|--------------------|----------------------------|---------------------------------|
| | | | | | | Ω MIL-R-10509 ± 100 ppm/°C (D) | Ω MIL-R-10509 ± 50 ppm/°C (C) | Ω MIL-R-10509 ± 25 ppm/°C (E) | Ω MIL-PRF-22684 | | |
| CMF50 | RN50 | 08 | - | 0.05 | 200 | - | 10 to 100K | 10 to 100K | - | 0.1, 0.25, 0.5, 1 | 450 |
| CMF55 | RN55 | 07 | 0.125 | 0.10 | 200 | 10 to 301K | 49.9 to 100K | 49.9 to 100K | - | 0.1, 0.25, 0.5, 1 | 450 |
| CMF60 | RN60 | 01 | 0.25 | 0.125 | 300 | 10 to 1M | 49.9 to 499K | 49.9 to 499K | - | 0.1, 0.25, 0.5, 1 | 500 |
| CMF65 | RN65 | 02 | 0.50 | 0.25 | 350 | 10 to 2M | 49.9 to 1M | 49.9 to 1M | - | 0.1, 0.25, 0.5, 1 | 900 |
| CMF70 | RN70 | 03 | 0.75 ⁽²⁾ | 0.50 | 500 | 10 to 2.49M | 24.9 to 1M | 24.9 to 1M | - | 0.1, 0.25, 0.5, 1 | 900 |
| CMF07 | RL07 | 01 | 0.25 | - | 250 | - | - | - | 51 to 150K | 2, 5 | 450 |
| CMF20 | RL20 | 02 | 0.50 | - | 350 | - | - | - | 4.3 to 470K | 2, 5 | 700 |

Notes

- (1) Continuous working voltage shall be $\sqrt{P \times R}$ or maximum working voltage, whichever is less.
 (2) Formerly rated at 1 W and is the direct replacement for RN70 of MIL-R-10509 rev. D.
 (3) Tolerances of ± 0.1 %, ± 0.25 % and ± 0.5 % are not applicable to characteristic D.

TECHNICAL SPECIFICATIONS

| PARAMETER | UNIT | CONDITION |
|-----------------------------|-------|---|
| Voltage Coefficient | ppm/V | 5 when measured between 10 % and full rated voltage |
| Insulation Resistance | Ω | ≥ 10 ¹⁰ min. dry; ≥ 10 ⁸ min. after moisture test |
| Operating Temperature Range | °C | -65/+175 (see derating curves for military range) |
| Terminal Strength | lb | 5 pound pull test for RL07/RL20; 2 pound pull test for all others |
| Solderability | | Continuous satisfactory coverage when tested in accordance with MIL-R-10509 and MIL-PRF-22684 |



GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: RN60D3483FR36 (preferred part numbering format)

| | | | | | | | | | | | | | | | |
|--------------------------------------|---|---|---|--|---|---|---|---|--|---|---|---|--|--|--|
| R | N | 6 | 0 | D | 3 | 4 | 8 | 3 | F | R | 3 | 6 | | | |
| MIL STYLE | CHARACTERISTICS | | | RESISTANCE VALUE | | | TOLERANCE CODE | | PACKAGING | | | SPECIAL | | | |
| RN50 RN55 RN60 RN65 RN70 | E = 25 ppm C = 50 ppm D = 100 ppm | | | 3 digit significant figure, followed by a multiplier. Use "R" for values < 100 Ω 10R0 = 10 Ω 2152 = 21.5 kΩ 2494 = 2.49 MΩ | | | B = ± 0.1 % C = ± 0.25 % D = ± 0.5 % F = ± 1 % | | B14 = tin / lead, bulk BSL = tin / lead, bulk, single lot date code R36 = tin / lead, T/R (full) RE6 = tin / lead, T/R (1000 pieces) RSL = tin / lead, T/R, single lot date code | | | Blank = standard (Dash number) 88 = hot solder dip 143 = non-magnetic | | | |

Historical Part Number Example: RN60D3483F (will continue to be accepted)

| | | | | |
|-----------|----------------|------------------|----------------|-----------|
| RN60 | D | 3483 | F | R36 |
| MIL STYLE | CHARACTERISTIC | RESISTANCE VALUE | TOLERANCE CODE | PACKAGING |

New Global Part Numbering: RL07S471JR36 (preferred part numbering format)

| | | | | | | | | | | | | | | |
|--------------|----------------|---|---|---|---|---|------------------------|---|--|---|---|---|--|--|
| R | L | 0 | 7 | S | 4 | 7 | 1 | J | R | 3 | 6 | | | |
| MIL STYLE | LEAD MATERIAL | | | RESISTANCE VALUE | | | TOLERANCE CODE | | PACKAGING | | | SPECIAL | | |
| RL07 RL20 | S = solderable | | | 2 digit significant figure, followed by a multiplier. Use "R" for values < 10 Ω 4R3 = 4.3 Ω 202 = 2.0 kΩ 474 = 470 kΩ | | | G = ± 2 % J = ± 5 % | | B14 = tin / lead, bulk BSL = tin / lead, bulk, single lot date code R36 = tin / lead, T/R (full) RE6 = tin / lead, T/R (1000 pieces) RSL = tin / lead, T/R, single lot date code | | | Blank = standard (Dash number) 88 = hot solder dip 143 = non-magnetic | | |

Historical Part Number Example: RL07S471J (will continue to be accepted)

| | | | | |
|-----------|---------------|------------------|----------------|-----------|
| RL07 | S | 471 | J | R36 |
| MIL STYLE | LEAD MATERIAL | RESISTANCE VALUE | TOLERANCE CODE | PACKAGING |

Note

- For additional information on packaging, refer to the Through Hole Resistor Packaging document (www.vishay.com/doc?31544)

MATERIAL SPECIFICATIONS

| | |
|-------------|--|
| Element | Nickel-chrome alloy |
| Coating | Flame retardant epoxy, formulated for superior moisture protection |
| Core | Fire-cleaned high purity ceramic |
| Termination | Standard lead material is solder-coated copper. Solderable and weldable. |

APPLICABLE MIL-SPECS

MIL-R-10509 and MIL-PRF-22684: The CMF models meet or exceed the electrical, environmental and dimensional requirements of MIL-R-10509 and MIL-PRF-22684.

Noise: Vishay Dale metal film resistors have exceptionally low noise level. Average for standard resistance range is 0.10 μV per V over a decade of frequency, with low and intermediate resistance values typically below 0.05 μV per V.


CAGE CODE: 91637

ENVIRONMENTAL SPECIFICATIONS


| | |
|------------|---|
| General | Environmental performance is shown in the Environmental Performance table. Test methods are those specified in MIL-R-10509 and MIL-PRF-22684. |
| Shelf Life | Resistance shifts due to storage at room temperature are negligible. |



Vishay Dale CMF resistors have an operating temperature range of -65 °C to +175 °C. They must be derated according to the following curves:

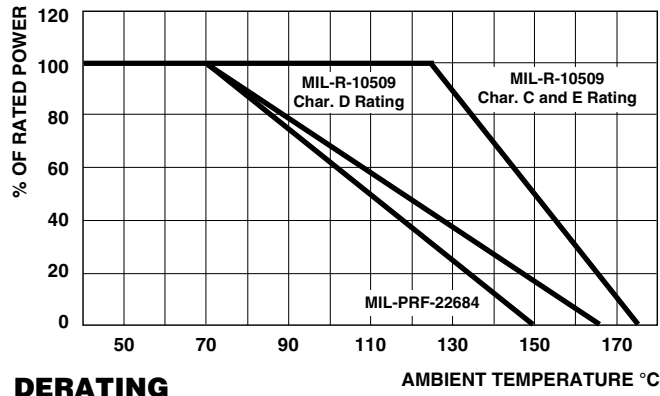

DIMENSIONS in inches (millimeters)

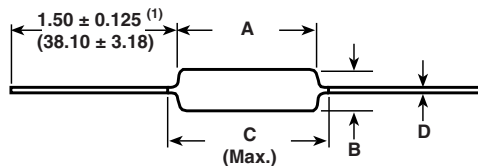

| VISHAY DALE MODEL | A | B | C (MAX.) | D |
|-------------------|---------------------------------|--------------------------------|------------------|--------------------------------|
| CMF50 | 0.150 ± 0.020 (3.81 ± 0.51) | 0.065 ± 0.015 (1.65 ± 0.38) | 0.244 (6.20) | 0.016 ± 0.002 (0.41 ± 0.05) |
| CMF55 | 0.240 ± 0.020 (6.10 ± 0.51) | 0.090 ± 0.008 (2.29 ± 0.20) | 0.290 (7.37) | 0.025 ± 0.002 (0.64 ± 0.05) |
| CMF60 | 0.344 ± 0.031 (8.74 ± 0.79) | 0.145 ± 0.015 (3.68 ± 0.38) | 0.425 (10.80) | 0.025 ± 0.002 (0.64 ± 0.05) |
| CMF65 | 0.562 ± 0.031 (14.27 ± 0.79) | 0.180 ± 0.015 (4.57 ± 0.38) | 0.687 (17.45) | 0.025 ± 0.002 (0.64 ± 0.05) |
| CMF70 | 0.562 ± 0.031 (14.27 ± 0.79) | 0.180 ± 0.015 (4.57 ± 0.38) | 0.687 (17.45) | 0.032 ± 0.002 (0.81 ± 0.05) |
| CMF07 | 0.240 ± 0.020 (6.10 ± 0.51) | 0.090 ± 0.008 (2.29 ± 0.20) | 0.290 (7.37) | 0.025 ± 0.002 (0.64 ± 0.05) |
| CMF20 | 0.375 ± 0.040 (9.53 ± 1.02) | 0.145 ± 0.015 (3.68 ± 0.38) | 0.425 (10.80) | 0.032 ± 0.002 (0.81 ± 0.05) |

Note


(1) Lead length for product in bulk pack. For product supplied in tape and reel, the actual lead length would be based on the body size, tape spacing and lead trim

| MILITARY POWER RATING | | | |
|-----------------------|--------------------|----------------------|---------------|
| WATTAGE | MILITARY QUALIFIED | | |
| | MIL-R-10509 | | MIL-PRF-22684 |
| | AT +70 °C (D) | AT +125 °C (C and E) | AT +70 °C |
| 0.05 | - | RN50 | - |
| 0.10 | - | RN55 | - |
| 0.125 | RN55 | RN60 | - |
| 0.25 | RN60 | RN65 | RL07 |
| 0.50 | RN65 | RN70 | RL20 |
| 0.75 (1) | RN70 | - | - |

Notes

• Commercial equivalents of military styles are available with higher power ratings. Consult factory

(1) Formerly rated at 1 W and is the direct replacement for RN70 of MIL-R-10509 rev. D

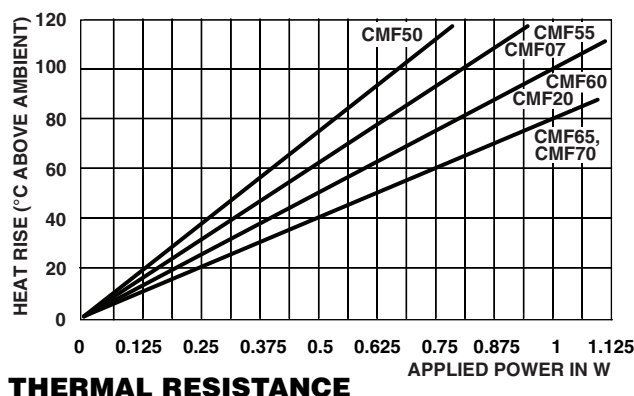**MARKING** (per MIL-PRF-10509)

Characteristics: D = 100 ppm, C = 50 ppm, E = 25 ppm
 Tolerance: F = 1 %, D = 0.5 %, C = 0.25 %, B = 0.1 %
 Value = Three significant figures and multiplier
 J = JAN (Joint Army - Navy) brand

RN50: (3 lines)

J50D JAN, type, characteristic

1211 Value

F137 Tolerance and 3 digit date code

RN55, RN60, RN65, RN70 (4 lines)

DALE Company logo

0137J 4 digit date code and JAN brand

RN55D Type and characteristic

1211F Value and Tolerance

Note

- RL series are color banded per MIL-PRF-22684.

PERFORMANCE

| REQUIREMENT | MIL-R-10509 | | | MIL-PRF-22684 |
|--|---------------------------|---------------------------|---------------------------|---------------------------|
| | CHARACTERISTIC D | CHARACTERISTIC C | CHARACTERISTIC E | |
| MIL Temperature Coefficient | +200 ppm/°C -500 ppm/°C | ± 50 ppm/°C | ± 25 ppm/°C | ± 200 ppm/°C |
| Applicable Vishay Dale Temperature Coefficient | ± 100 ppm/°C | ± 50 ppm/°C | ± 25 ppm/°C | ± 200 ppm/°C |
| TEST | MIL_{max.} | MIL_{max.} | MIL_{max.} | MIL_{max.} |
| Thermal Shock | ± 0.50 % ΔR | ± 0.25 % ΔR | ± 0.25 % ΔR | ± 1.00 % ΔR |
| Short Time Overload | ± 0.50 % ΔR | ± 0.25 % ΔR | ± 0.25 % ΔR | ± 0.50 % ΔR |
| Low Temperature Operation | ± 0.50 % ΔR | ± 0.25 % ΔR | ± 0.25 % ΔR | ± 0.50 % ΔR |
| Moisture Resistance | ± 1.50 % ΔR | ± 0.50 % ΔR | ± 0.50 % ΔR | ± 1.50 % ΔR |
| Shock | ± 0.50 % ΔR | ± 0.25 % ΔR | ± 0.25 % ΔR | ± 0.50 % ΔR |
| Vibration | ± 0.50 % ΔR | ± 0.25 % ΔR | ± 0.25 % ΔR | ± 0.50 % ΔR |
| Load Life | ± 1.00 % ΔR | ± 0.50 % ΔR | ± 0.50 % ΔR | ± 2.00 % ΔR |
| Dielectric Withstanding Voltage | ± 0.50 % ΔR | ± 0.25 % ΔR | ± 0.25 % ΔR | ± 0.50 % ΔR |
| Effect of Solder | ± 0.50 % ΔR | ± 0.10 % ΔR | ± 0.10 % ΔR | ± 0.50 % ΔR |



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.