

VS-26MB10A Datasheet



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	VS-26MB10A-DG
Manufacturer	Vishay General Semiconductor - Diodes Division
Manufacturer Product Number	VS-26MB10A
Description	BRIDGE RECT 1PHASE 100V 25A D-34
Detailed Description	Bridge Rectifier Single Phase Standard 100 V QC Terminal D-34



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

VS-26MB10A

Series:

-

Diode Type:

Single Phase

Voltage - Peak Reverse (Max):

100 V

Current - Reverse Leakage @ Vr:

10 μ A @ 100 V

Mounting Type:

QC Terminal

Supplier Device Package:

D-34

Manufacturer:

Vishay General Semiconductor - Diodes Division

Product Status:

Active

Technology:

Standard

Current - Average Rectified (Io):

25 A

Operating Temperature:

-40°C ~ 150°C (TJ)

Package / Case:

4-Square, D-34

Base Product Number:

26MB10

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8541.10.0080

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

International
IR Rectifier


Bulletin I2715 rev. E 08/97

MB & JB SERIES

SINGLE PHASE BRIDGE

Power Modules

Features

- Universal, 3 way terminals:
push-on, wrap around or solder
- High thermal conductivity package,
electrically insulated case
- Center hole fixing
- Excellent power/volume ratio
- UL E 62320 approved 

10 A
 25 A
 35 A

Description

A range of extremely compact, encapsulated single phase bridge rectifiers offering efficient and reliable operation. They are intended for use in general purpose and instrumentation applications.

Major Ratings and Characteristics

Parameters	100JB-L	26MB-A 250JB-L	36MB-A 35MB-A	Units
I_O	10	25	35	A
@ T_C	65	65	60	°C
I_{FSM} @ 50Hz	148	400	475	A
@ 60Hz	155	420	500	A
I^2t @ 50Hz	110	790	1130	A ² s
@ 60Hz	100	725	1030	A ² s
V_{RRM} range	50 to 1600			V
T_J	-40 to 150			°C

MB & JB Series

Bulletin I2715 rev. E 08/97



ELECTRICAL SPECIFICATIONS

Voltage Ratings

Typenumber	Voltage Code	V _{RRM} , maximum repetitive peak reverse voltage V	V _{RSM} , maximum non-repetitive peak rev. voltage V	I _{RRM} max. @ T _J max. mA
100JB..L 26MB..A 250JB..L 36MB..A 35MB..A	5	50	75	2
	10	100	150	
	20	200	275	
	40	400	500	
	60	600	725	
	80	800	900	
	100	1000	1100	
	120	1200	1300	
	140	1400	1500	
	160	1600	1700	

Forward Conduction

Parameters	100JB-L	26MB-A 250JB-L	36MB-A 35MB-A	Units	Conditions
I _O Maximum DC output current @ Case temperature	10	25	35	A	Resistive or inductive load
	8	20	28	A	Capacitive load
	65	65	60	°C	
I _{FSM} Maximum peak, one-cycle non-repetitive forward current	148	400	475	A	t = 10ms No voltage reappplied
	155	420	500		t = 8.3ms 100% V _{RRM} reappplied
	125	335	400		t = 10ms 100% V _{RRM} reappplied
	130	350	420		t = 8.3ms 100% V _{RRM} reappplied
I ² t Maximum I ² t for fusing	110	790	1130	A ² s	t = 10ms No voltage reappplied
	100	725	1030		t = 8.3ms 100% V _{RRM} reappplied
	78	560	800		t = 10ms 100% V _{RRM} reappplied
	71	512	730		t = 8.3ms 100% V _{RRM} reappplied
I ² /t Maximum I ² /t for fusing	1.1	5.6	11.3	KA ² /s	I ² t for time t _x = I ² √t x √t _x ; 0.1 ≤ t _x ≤ 10ms, V _{RRM} = 0V
V _{F(TO)1} Low-level of threshold voltage	1.00	0.76	0.79	V	(16.7% x π x I _{F(AV)}) < I < π x I _{F(AV)} , @ T _J max.
V _{F(TO)2} High-level of threshold voltage	1.17	0.92	0.96		(I > π x I _{F(AV)}), @ T _J max.
r _{t1} Low-level forward slope resistance	15.4	6.8	5.8	mΩ	(16.7% x π x I _{F(AV)}) < I < π x I _{F(AV)} , @ T _J max.
r _{t2} High-level forward slope resistance	10.8	5.0	4.5		(I > π x I _{F(AV)}), @ T _J max.
V _{FM} Maximum forward voltage drop	1.3	1.11	1.14	V	T _J = 25°C, I _{FM} = I _{Favg} (arm) x π, tp = 400μs
I _{RRM} Max. DC reverse current	10	10	10	μA	T _J = 25°C, per diode at V _{RRM}
V _{INS} RMS isolation voltage base plate	2700	2700	2700	V	f = 50 Hz, t = 1s

Thermal and Mechanical Specifications

Parameters	100JB-L	26MB-A 250JB-L	36MB-A 35MB-A	Units	Conditions
T _J Junction temperature range	-40 to 150			°C	
T _{stg} Storage temperature range	-40 to 150			°C	
R _{thJC} Max. thermal resistance junction to case	3.5	1.7	1.2	K/W	Per bridge
R _{thCS} Max. thermal resistance, case to heatsink	0.2			K/W	Mounting surface, smooth, flat and greased
wt Approximate weight	20			g	
T Mounting Torque ± 10%	2.0			Nm	Bridge to heatsink

Ordering Information Table

Device Code

36	MB	160	A
1	2	3	4

1 - Current rating code:
 26 & 36 = 10A (Avg)
 100 & 250 = 25A (Avg)
 35 = 35A (Avg)
 American coding
 European coding

2 - Circuit configuration:
 JB = Single phase american coding
 MB = Single phase european coding

3 - Voltage code: MB series = code x 10 = V_{RRM}
 JB series = code x 100 = V_{RRM}

4 - Diode bridge rectifier:
 A = 26MB, 36MB, 35MB Series
 L = 100JB and 250JB Series

Outline Table

Suggested plugging force: 200 N max; axially applied to faston terminals

All dimensions in millimetres (inches)

Not To Scale

MB & JB Series

Bulletin I2715 rev. E 08/97

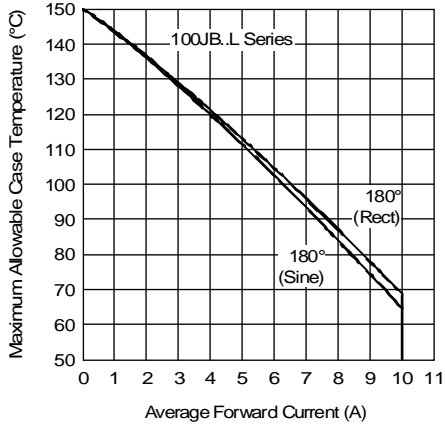


Fig. 1 - Current Ratings Characteristics

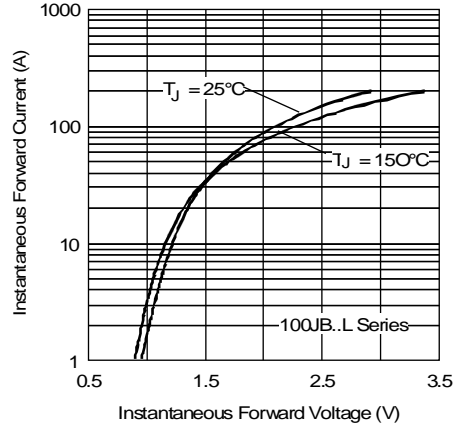


Fig. 2 - Forward Voltage Drop Characteristics

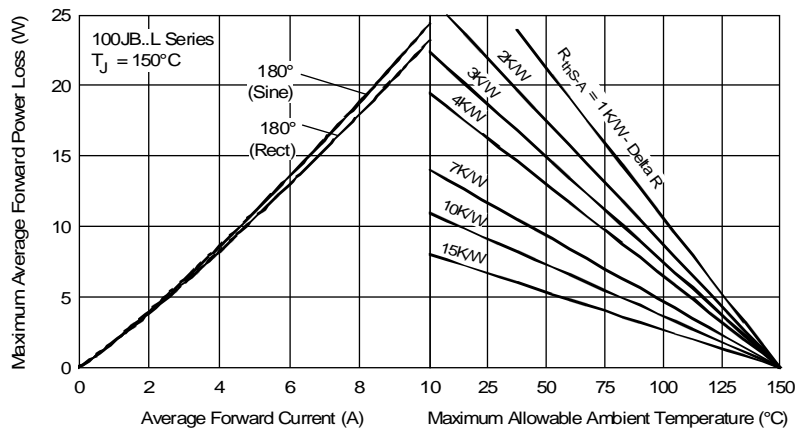


Fig. 3 - Total Power Loss Characteristics

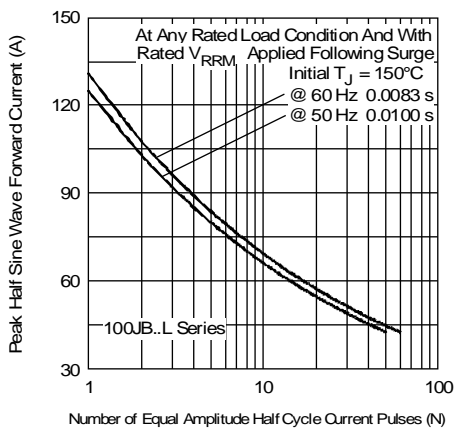


Fig. 4 - Maximum Non-Repetitive Surge Current

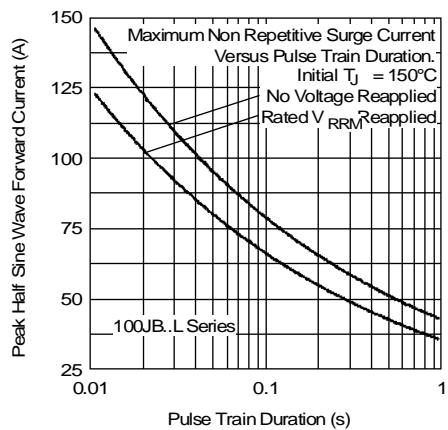


Fig. 5 - Maximum Non-Repetitive Surge Current

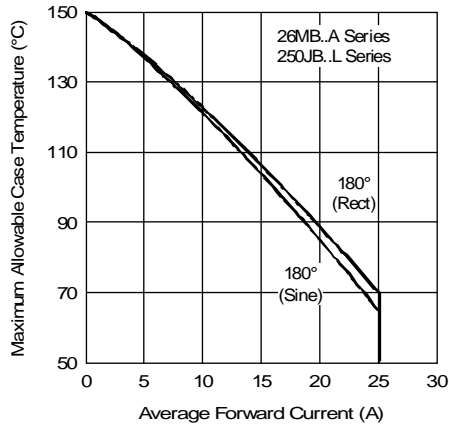


Fig. 6 - Current Ratings Characteristics

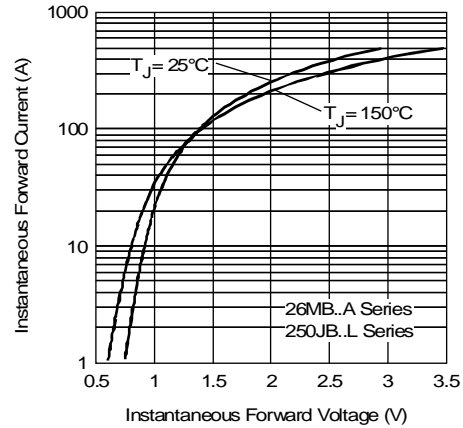


Fig. 7 - Forward Voltage Drop Characteristics

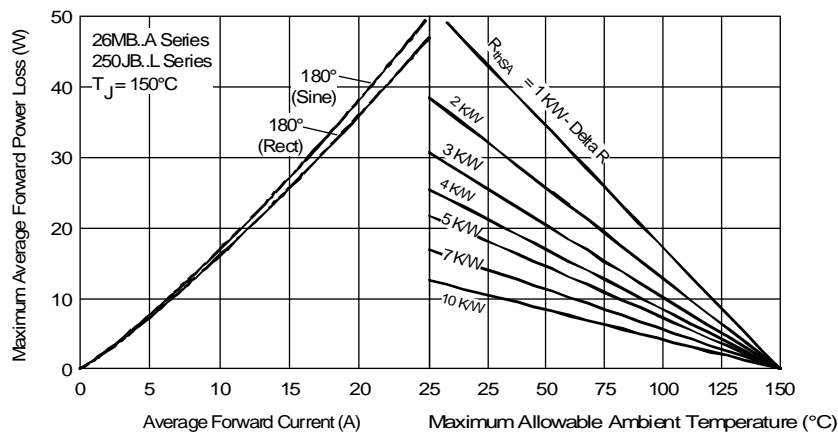


Fig. 8 - Total Power Loss Characteristics

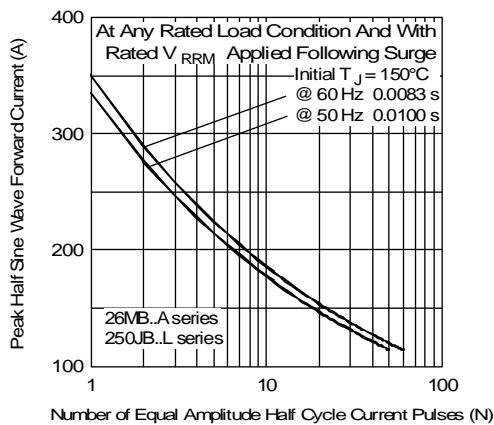


Fig. 9 - Maximum Non-Repetitive Surge Current

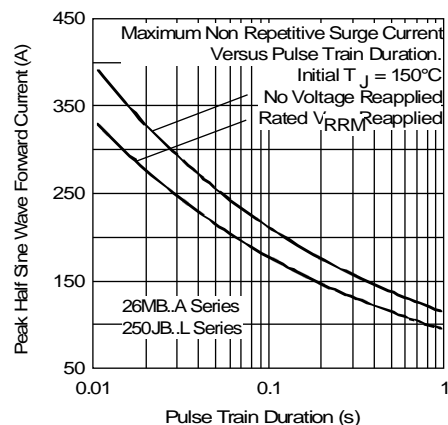


Fig. 10 - Maximum Non-Repetitive Surge Current

MB & JB Series

Bulletin I2715 rev. E 08/97

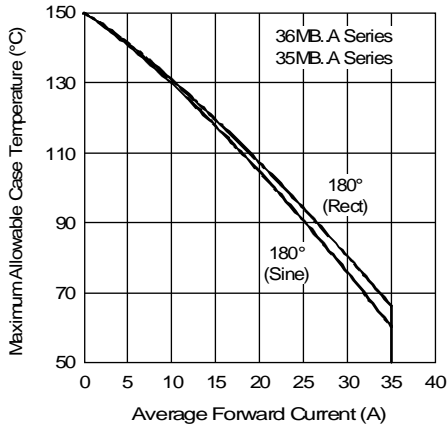


Fig. 11 - Current Ratings Characteristics

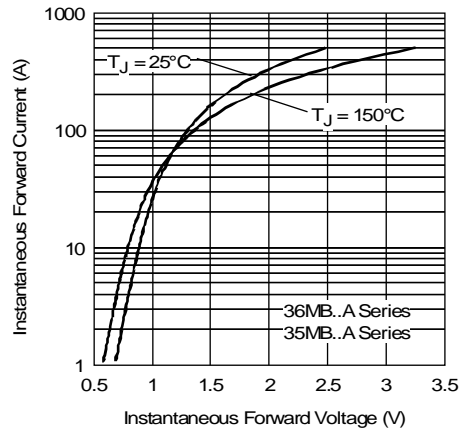


Fig. 12 - Forward Voltage Drop Characteristics

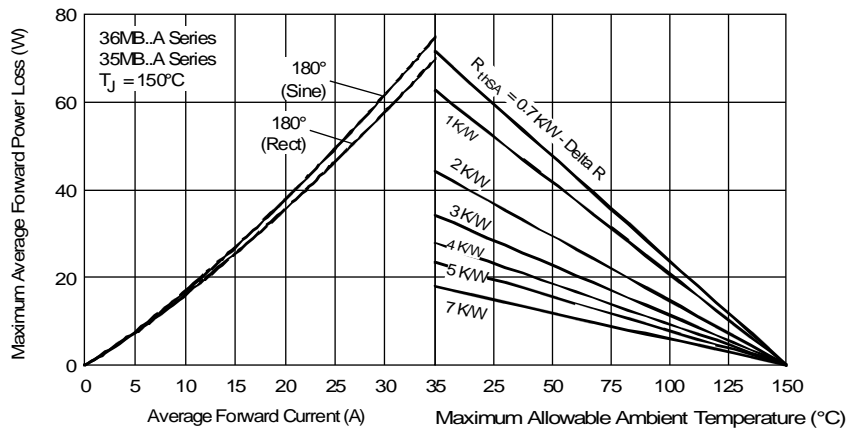


Fig. 13 - Total Power Loss Characteristics

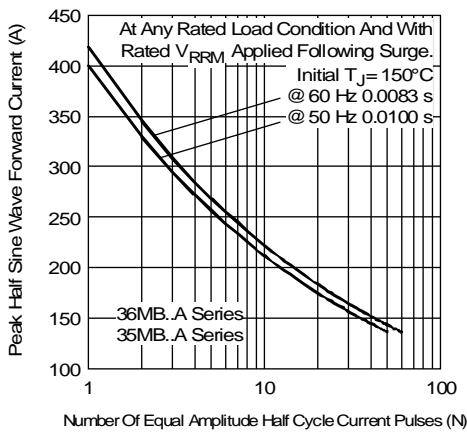


Fig. 14 - Maximum Non-Repetitive Surge Current

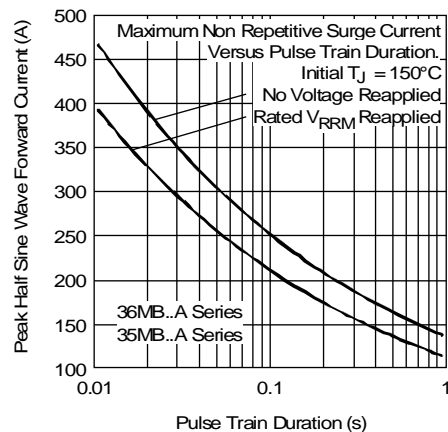


Fig. 15 - Maximum Non-Repetitive Surge Current

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.