

# VS-T110HF100 Datasheet



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	VS-T110HF100-DG
Manufacturer	<a href="#">Vishay General Semiconductor - Diodes Division</a>
Manufacturer Product Number	VS-T110HF100
Description	DIODE GEN PURP 1KV 110A D-55
Detailed Description	Diode 1000 V 110A Chassis Mount D-55

This model VS-T110HF100 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

VS-T110HF100

Series:

-

Technology:

Standard

Current - Average Rectified (Io):

110A

Current - Reverse Leakage @ Vr:

20 mA @ 1000 V

Mounting Type:

Chassis Mount

Supplier Device Package:

D-55

Manufacturer:

Vishay General Semiconductor - Diodes Division

Product Status:

Active

Voltage - DC Reverse (Vr) (Max):

1000 V

Speed:

Standard Recovery >500ns, > 200mA (Io)

Capacitance @ Vr, F:

-

Package / Case:

D-55 T-Module

Base Product Number:

T110

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8541.10.0080

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99



# VS-T40HF..., VS-T70HF..., VS-T85HF..., VS-T110HF... Series

[www.vishay.com](http://www.vishay.com)


Vishay Semiconductors

## Power Rectifiers Diodes (T-modules), 40 A to 110 A



D-55 (T-module)

### FEATURES

- Electrically isolated base plate
- Types up to 1200 V<sub>RRM</sub>
- 3500 V<sub>RMS</sub> isolating voltage
- Simplified mechanical designs, rapid assembly
- High surge capability
- Large creepage distances
- UL E78996 approved 
- Designed and qualified for industrial level
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



RoHS  
COMPLIANT

PRIMARY CHARACTERISTICS	
I <sub>F(AV)</sub>	40 A to 110 A
Type	Modules - diode, high voltage
V <sub>RRM</sub>	100 V to 1200 V
Package	D-55 (T-module)
Circuit configuration	Single diode

### DESCRIPTION / APPLICATIONS

These series of T-modules use standard recovery power rectifier diodes. The semiconductors are electrically isolated from the metal base, allowing common heatsink and compact assembly to be built.

Applications include power supplies, battery charges, welders, motor controls and general industrial current rectification.

MAJOR RATINGS AND CHARACTERISTICS						
SYMBOL	CHARACTERISTICS	T40HF	T70HF	T85HF	T110HF	UNITS
I <sub>F(AV)</sub>		40	70	85	110	A
	T <sub>C</sub>	85	85	85	85	°C
I <sub>F(RMS)</sub>		63	110	134	173	A
I <sub>FSM</sub>	50 Hz	570	1200	1700	2000	A
	60 Hz	600	1250	1800	2100	
I <sup>2</sup> <sub>t</sub>	50 Hz	1630	7100	14 500	20 500	A <sup>2</sup> s
	60 Hz	1500	6450	13 500	18 600	
I <sup>2</sup> √t		16 300	70 700	148 700	204 300	A <sup>2</sup> √s
V <sub>RRM</sub>		100 to 1200				V
T <sub>J</sub>		-40 to +150				°C

### ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS				
TYPE NUMBER	VOLTAGE CODE	V <sub>RRM</sub> , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	V <sub>RSM</sub> , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	I <sub>RRM</sub> MAXIMUM AT T <sub>J</sub> = 25 °C μA
VS-T40HF... VS-T70HF... VS-T85HF... VS-T110HF...	10	100	150	100
	20	200	300	
	40	400	500	
	60	600	700	
	80	800	900	
	100	1000	1100	
	120	1200	1300	



# VS-T40HF..., VS-T70HF..., VS-T85HF..., VS-T110HF... Series

[www.vishay.com](http://www.vishay.com)

Vishay Semiconductors

FORWARD CONDUCTION									
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES				UNITS	
				T40HF	T70HF	T85HF	T110HF		
Maximum average forward current at case temperature	$I_{F(AV)}$	180° conduction, half sine wave		40	70	85	110	A	
				85	85	85	85	°C	
Maximum RMS forward current	$I_{F(RMS)}$			63	110	134	173	A	
Maximum peak, one-cycle forward, non-repetitive surge current	$I_{FSM}$	t = 10 ms t = 8.3 ms	No voltage reappplied	Sinusoidal half wave, initial $T_J = T_J$ maximum	570	1200	1700	2000	A
					600	1250	1800	2100	
					480	1000	1450	1700	
					500	1050	1500	1780	
Maximum $I^2t$ for fusing	$I^2t$	t = 10 ms t = 8.3 ms	No voltage reappplied		1630	7100	14 500	20 500	A <sup>2</sup> s
					1500	6450	13 500	18 600	
					1150	5000	10 500	14 500	
					1050	4570	9600	13 200	
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	t = 0.1 ms to 10 ms, no voltage reappplied		16 300	70 700	148 700	204 300	A <sup>2</sup> √s	
Low level value of threshold voltage	$V_{F(TO)1}$	(16.7 % $\times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}$ , $T_J$ maximum)		0.66	0.76	0.68	0.68	V	
High level value of threshold voltage	$V_{F(TO)2}$	(I > $\pi \times I_{F(AV)}$ , $T_J$ maximum)		0.84	0.95	0.90	0.86		
Low level value of forward slope resistance	$r_{f1}$	(16.7 % $\times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}$ , $T_J$ maximum)		4.3	2.4	1.76	1.56	mΩ	
High level value of forward slope resistance	$r_{f2}$	(I > $\pi \times I_{F(AV)}$ , $T_J$ maximum)		3.1	1.7	1.08	1.12		
Maximum forward voltage drop	$V_{FM}$	$I_{FM} = \pi \times I_{F(AV)}$ , $T_J = 25^\circ\text{C}$ , $t_p = 400 \mu\text{s}$ square pulse Average power = $V_{F(TO)} \times I_{F(AV)} + r_f \times (I_{F(RMS)})^2$		1.30	1.35	1.27	1.35	V	

BLOCKING							
PARAMETER	SYMBOL	TEST CONDITIONS	T40HF	T70HF	T85HF	T110HF	UNITS
Maximum peak reverse leakage current	$I_{RRM}$	$T_J = 150^\circ\text{C}$	15	15	20	20	mA
RMS isolation voltage	$V_{ISOL}$	50 Hz, circuit to base, all terminals shorted $T_J = 25^\circ\text{C}$ , t = 1 s	3500	3500	3500	3500	V

THERMAL AND MECHANICAL SPECIFICATIONS								
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES				UNITS
				T40HF	T70HF	T85HF	T110HF	
Maximum junction operating and storage temperature range	$T_J, T_{Stg}$			-40 to +150				°C
Maximum thermal resistance, junction to case per junction	$R_{thJC}$	DC operation		1.36	0.69	0.62	0.47	K/W
Maximum thermal resistance, case to heatsink	$R_{thCS}$	Mounting surface smooth, flat and greased		0.2				
Mounting torque, $\pm 10\%$ to heatsink terminals		Non-lubricated threads	M3.5 mounting screws <sup>(1)</sup>	1.3 $\pm$ 10 %				Nm
			M5 screw terminals	3 $\pm$ 10 %				
Approximate weight		See dimensions - link at the end of datasheet		54				g
Case style				D-55 (T-module)				

**Note**

<sup>(1)</sup> A mounting compound is recommended and the torque should be rechecked after a period of about 3 hours to allow for the spread of the compound



# VS-T40HF..., VS-T70HF..., VS-T85HF..., VS-T110HF... Series

[www.vishay.com](http://www.vishay.com)

Vishay Semiconductors

<b>ΔR CONDUCTION PER JUNCTION</b>											
DEVICES	SINUSOIDAL CONDUCTION AT T <sub>J</sub> MAXIMUM					RECTANGULAR CONDUCTION AT T <sub>J</sub> MAXIMUM					UNITS
	180°	120°	90°	60°	30°	180°	120°	90°	60°	30°	
T40HF...	0.12	0.14	0.18	0.27	0.46	0.09	0.15	0.20	0.28	0.46	K/W
T70HF...	0.09	0.11	0.14	0.20	0.35	0.07	0.11	0.15	0.21	0.35	
T85HF...	0.08	0.09	0.12	0.18	0.31	0.06	0.10	0.13	0.19	0.31	
T110HF...	0.05	0.07	0.09	0.14	0.23	0.05	0.08	0.10	0.15	0.24	

**Note**

- Table shows the increment of thermal resistance R<sub>thJC</sub> when devices operate at different conduction angles than DC

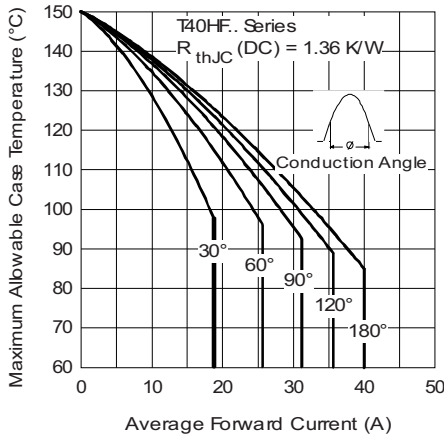


Fig. 1 - Current Ratings Characteristics

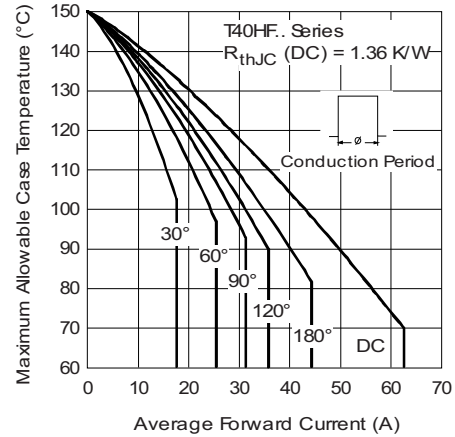


Fig. 2 - Current Ratings Characteristics

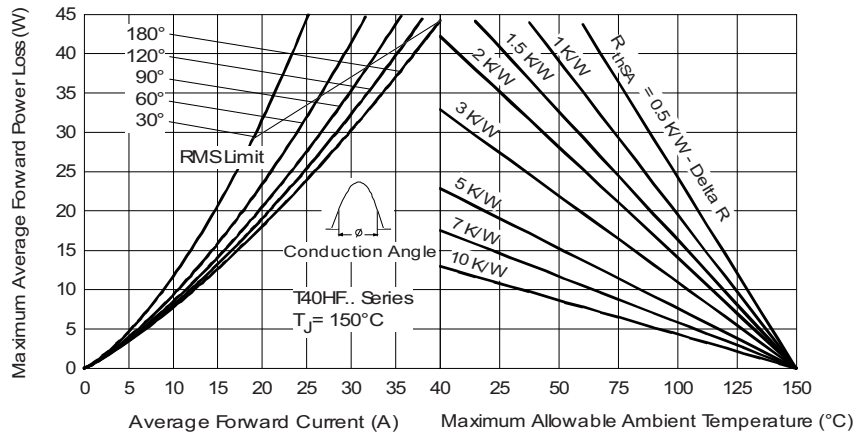


Fig. 3 - Forward Power Loss Characteristics



# VS-T40HF..., VS-T70HF..., VS-T85HF..., VS-T110HF... Series

[www.vishay.com](http://www.vishay.com)

Vishay Semiconductors

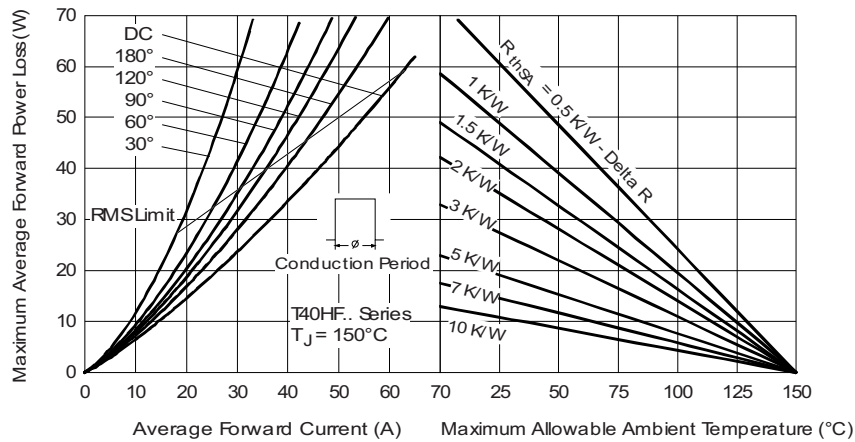


Fig. 4 - Forward Power Loss Characteristics

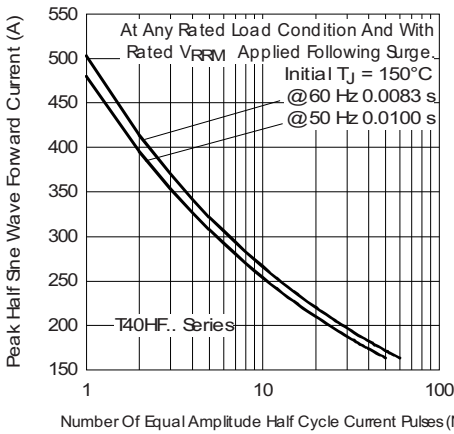


Fig. 5 - Maximum Non-Repetitive Surge Current

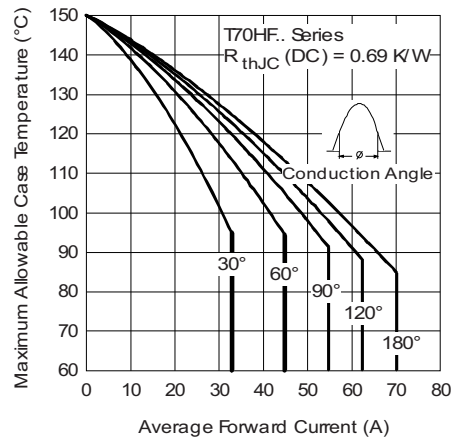


Fig. 7 - Current Ratings Characteristics

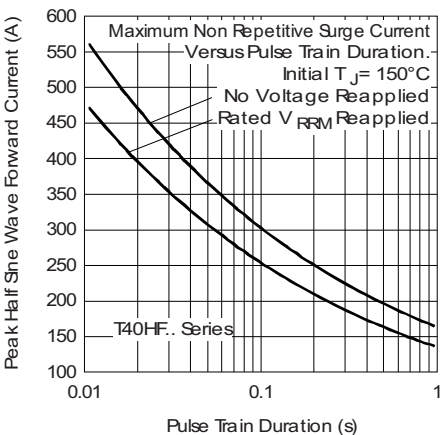


Fig. 6 - Maximum Non-Repetitive Surge Current

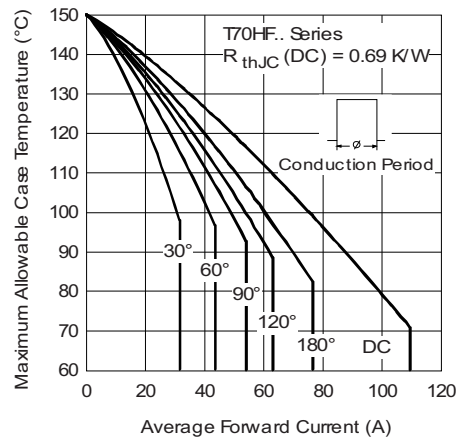


Fig. 8 - Current Ratings Characteristics



# VS-T40HF..., VS-T70HF..., VS-T85HF..., VS-T110HF... Series

[www.vishay.com](http://www.vishay.com)

Vishay Semiconductors

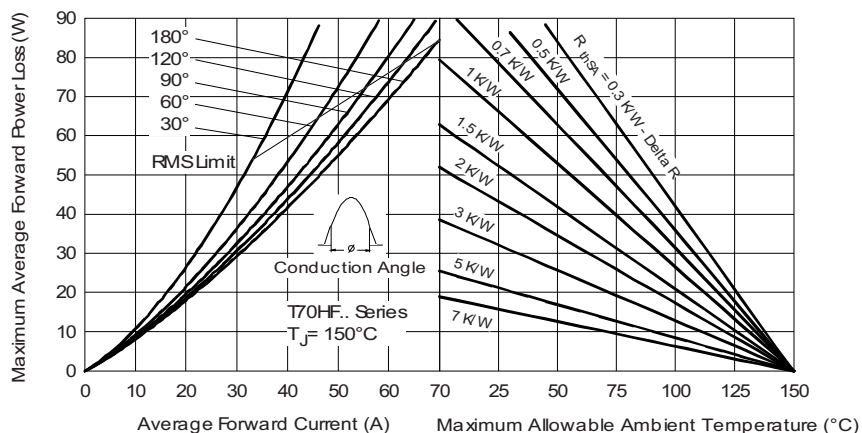


Fig. 9 - Forward Power Loss Characteristics

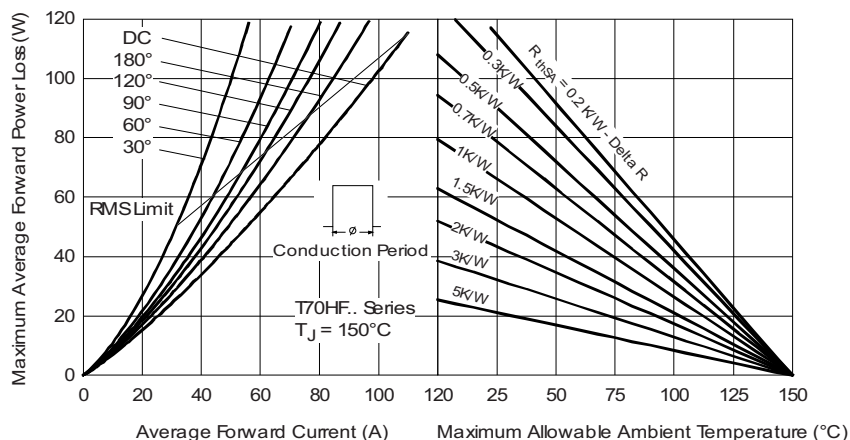


Fig. 10 - Forward Power Loss Characteristics

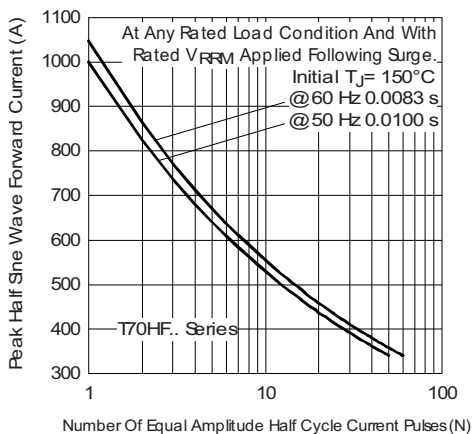


Fig. 11 - Maximum Non-Repetitive Surge Current

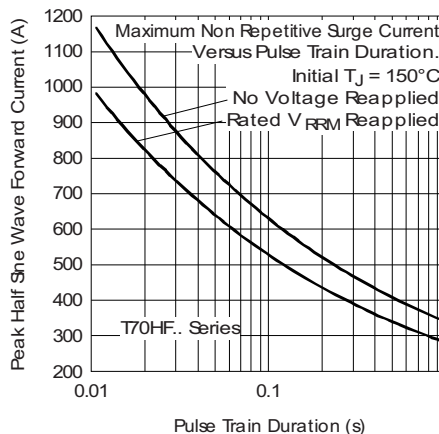


Fig. 12 - Maximum Non-Repetitive Surge Current



# VS-T40HF..., VS-T70HF..., VS-T85HF..., VS-T110HF... Series

[www.vishay.com](http://www.vishay.com)

Vishay Semiconductors

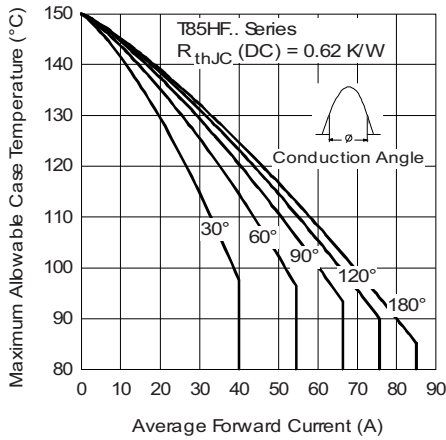


Fig. 13 - Current Ratings Characteristics

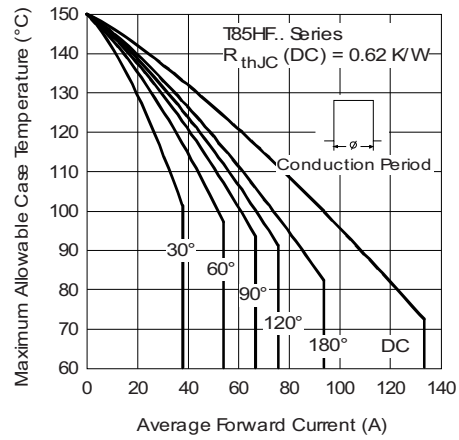


Fig. 14 - Current Ratings Characteristics

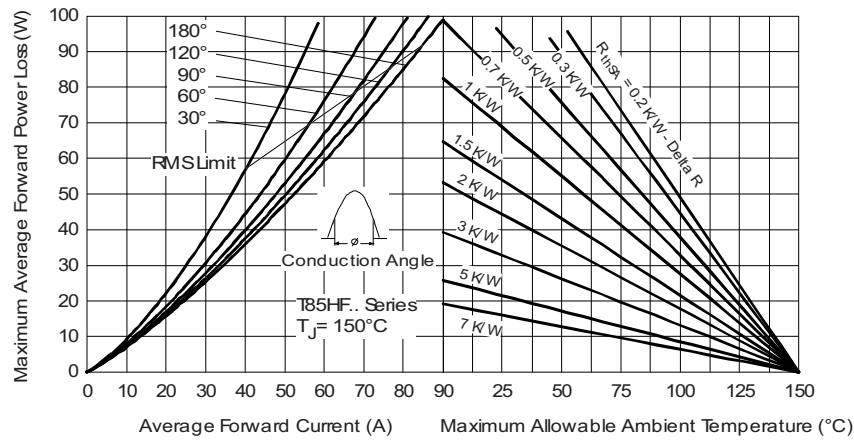


Fig. 15 - Forward Power Loss Characteristics

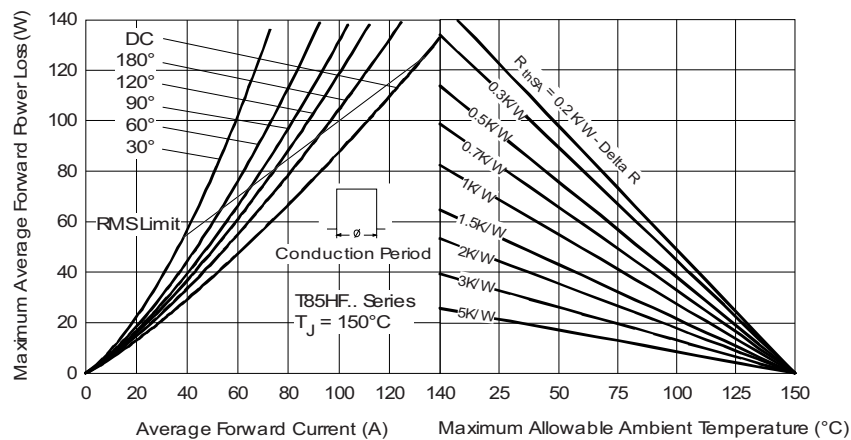


Fig. 16 - Forward Power Loss Characteristics



# VS-T40HF..., VS-T70HF..., VS-T85HF..., VS-T110HF... Series

[www.vishay.com](http://www.vishay.com)

Vishay Semiconductors

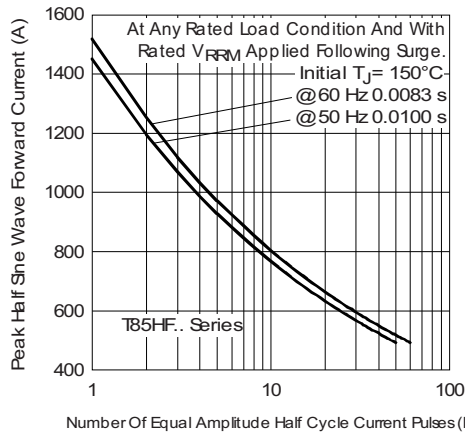


Fig. 17 - Maximum Non-Repetitive Surge Current

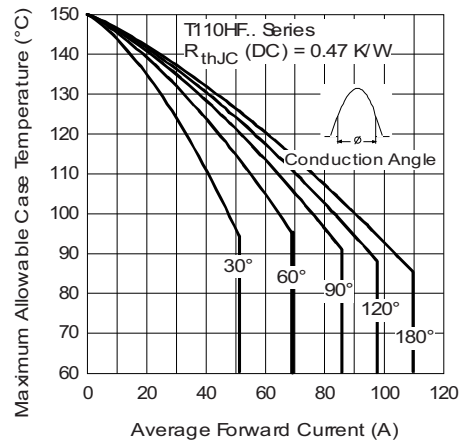


Fig. 19 - Current Ratings Characteristics

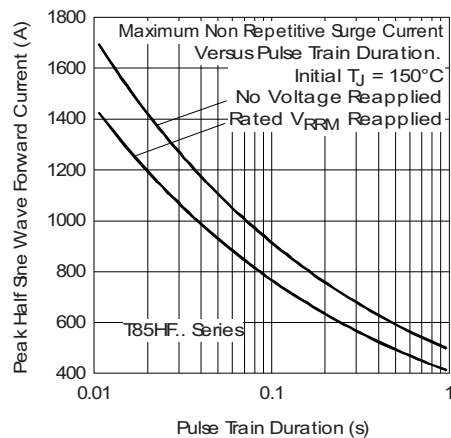


Fig. 18 - Maximum Non-Repetitive Surge Current

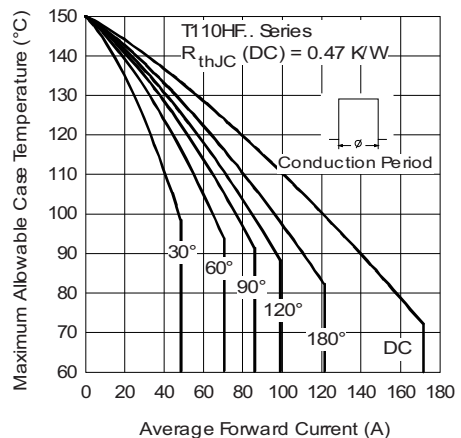


Fig. 20 - Current Ratings Characteristics

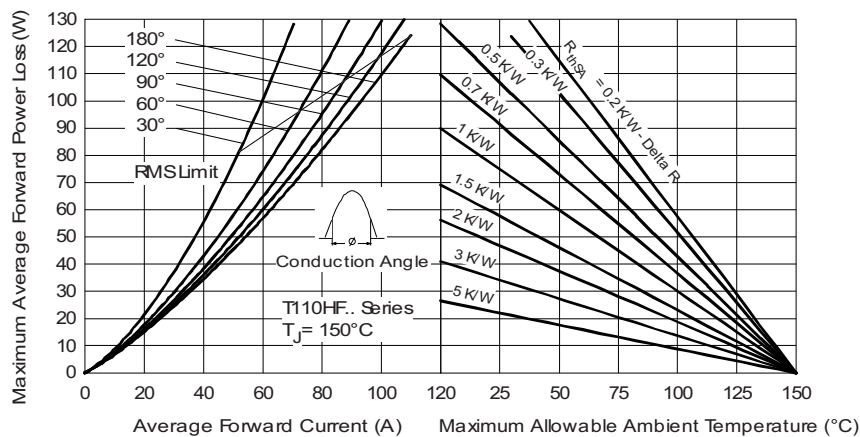


Fig. 21 - Forward Power Loss Characteristics



# VS-T40HF..., VS-T70HF..., VS-T85HF..., VS-T110HF... Series

[www.vishay.com](http://www.vishay.com)

Vishay Semiconductors

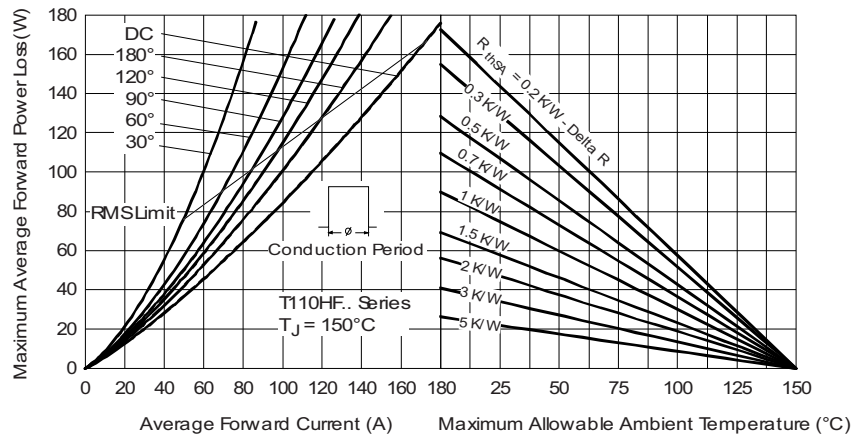


Fig. 22 - Forward Power Loss Characteristics

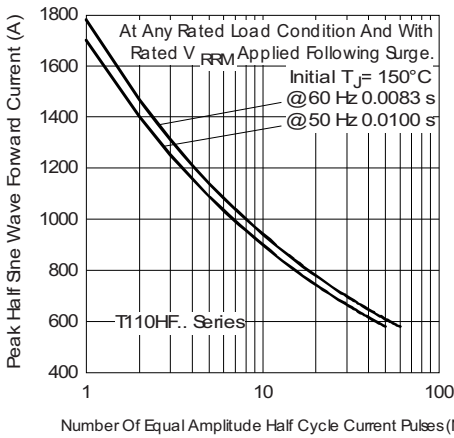


Fig. 23 - Maximum Non-Repetitive Surge Current

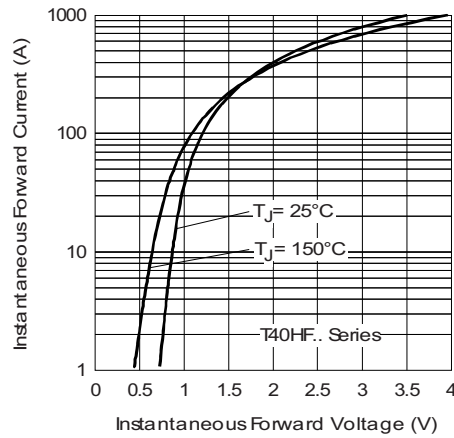


Fig. 25 - Forward Voltage Drop Characteristics

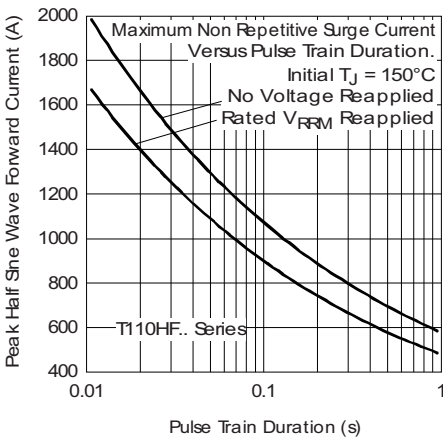


Fig. 24 - Maximum Non-Repetitive Surge Current

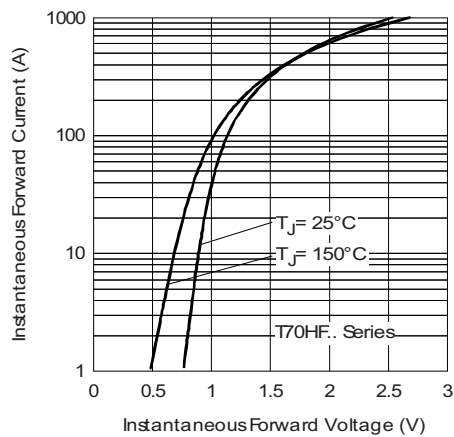


Fig. 26 - Forward Voltage Drop Characteristics



# VS-T40HF..., VS-T70HF..., VS-T85HF..., VS-T110HF... Series

[www.vishay.com](http://www.vishay.com)

Vishay Semiconductors

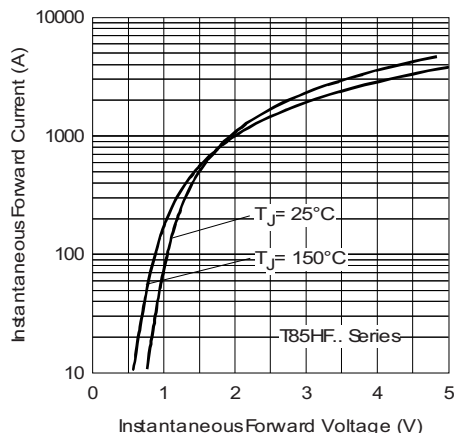


Fig. 27 - Forward Voltage Drop Characteristics

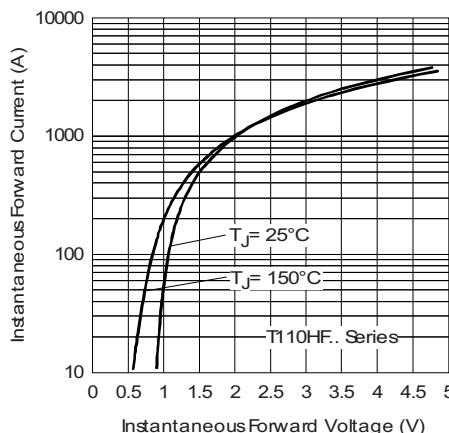


Fig. 28 - Forward Voltage Drop Characteristics

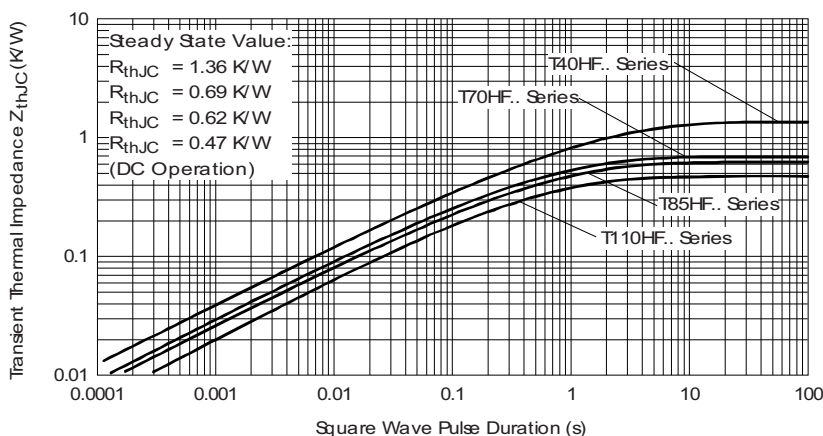


Fig. 29 - Thermal Impedance  $Z_{thJC}$  Characteristics

## ORDERING INFORMATION TABLE

Device code	<b>VS-</b>	<b>T</b>	<b>110</b>	<b>HF</b>	<b>120</b>
	①	②	③	④	⑤
	1	2	3	4	5
	-	-	-	-	-
	-	-	-	-	-
	-	-	-	-	-
	-	-	-	-	-
	-	-	-	-	-

CIRCUIT CONFIGURATION		
CIRCUIT DESCRIPTION	CIRCUIT CONFIGURATION CODE	CIRCUIT DRAWING
Single diode	HF	

LINKS TO RELATED DOCUMENTS	
Dimensions	<a href="http://www.vishay.com/doc?95313">www.vishay.com/doc?95313</a>



[www.vishay.com](http://www.vishay.com)

# Outline Dimensions

Vishay Semiconductors

## D-55 T-Module Diode Standard and Fast Recovery

**DIMENSIONS** in millimeters (inches)

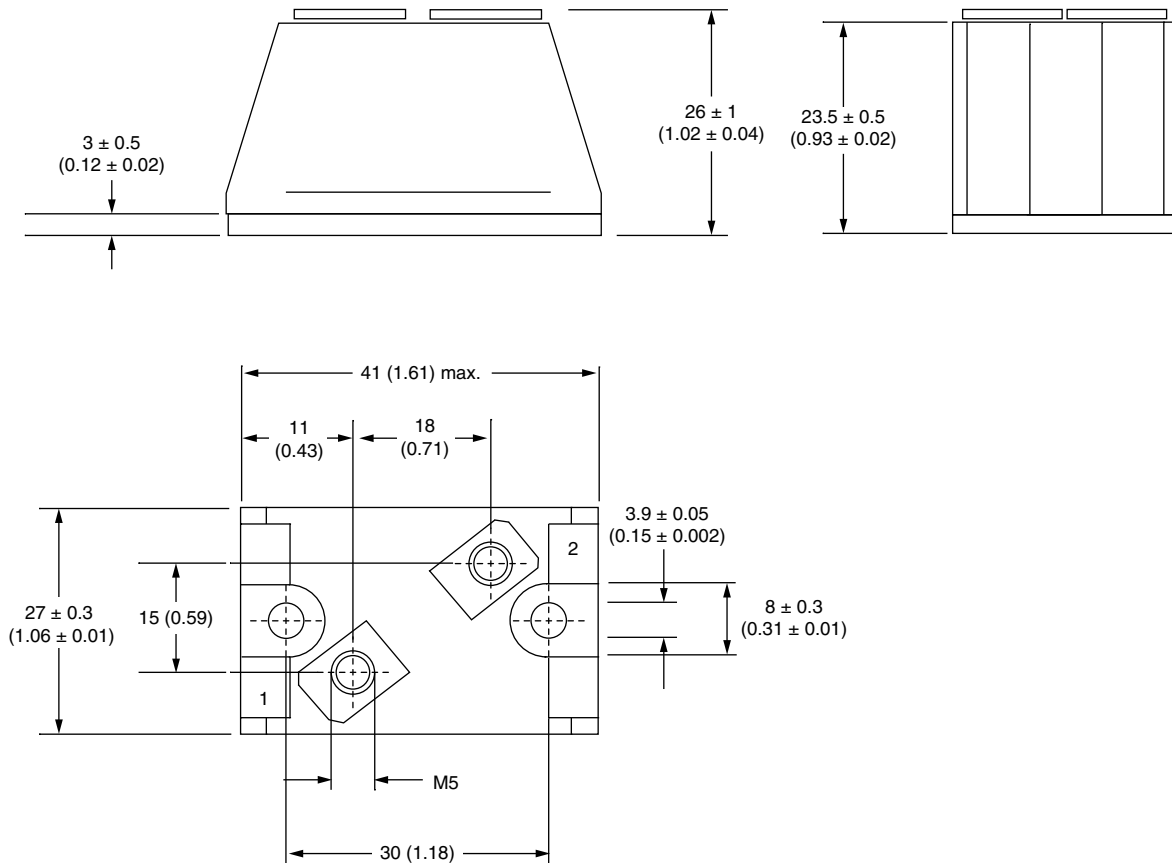

### Note

- 1 = Anode
- 2 = Cathode



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.