

# VS-T50RIA120 Datasheet



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	VS-T50RIA120-DG
Manufacturer	<a href="#">Vishay General Semiconductor - Diodes Division</a>
Manufacturer Product Number	VS-T50RIA120
Description	SCR PHASE CONT 1200V 50A D-55
Detailed Description	SCR Module 1.2 kV 80 A Single Chassis Mount D-55 T-Module

This model VS-T50RIA120 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

VS-T50RIA120

Series:

-

Structure:

Single

Voltage - Off State:

1.2 kV

Current - On State (It (RMS)) (Max):

80 A

Current - Gate Trigger (Igt) (Max):

100 mA

Current - Hold (Ih) (Max):

200 mA

Mounting Type:

Chassis Mount

Base Product Number:

T50

Manufacturer:

Vishay General Semiconductor - Diodes Division

Product Status:

Active

Number of SCRs, Diodes:

1 SCR

Current - On State (It (AV)) (Max):

50 A

Voltage - Gate Trigger (Vgt) (Max):

2.5 V

Current - Non Rep. Surge 50, 60Hz (I<sub>tsm</sub>):

1310A, 1370A

Operating Temperature:

-40°C ~ 125°C (Tj)

Package / Case:

D-55 T-Module

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8541.30.0080

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99


[www.vishay.com](http://www.vishay.com)
**VS-T..RIA Series**


Vishay Semiconductors

## Medium Power Phase Control Thyristors (Power Modules), 50 A, 70 A, 90 A



D-55 (T-module)

### FEATURES

- Electrically isolated base plate
- Types up to 1200  $V_{RRM}$
- 3500  $V_{RMS}$  isolating voltage
- Simplified mechanical designs, rapid assembly
- High surge capability
- Large creepage distances
- UL E78996 approved 
- Designed and qualified for industrial level
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)


**RoHS**  
COMPLIANT

PRIMARY CHARACTERISTICS	
Package	D-55 (T-module)
Circuit configuration	Single SCR
$I_{T(AV)}$	50 A, 70 A, 90 A
$V_{DRM}/V_{RRM}$	100 V, 1200 V
$V_{TM}$	1.55 V
$I_{GT}$	120 mA
$T_J$	-40 °C to +125 °C
Type	Modules - thyristor, standard

### DESCRIPTION

These series of T-modules are intended for general purpose applications such as battery chargers, welders and plating equipment, regulated power supplies and temperature and speed control circuits. The semiconductors are electrically isolated from the metal base, allowing common heatsinks and compact assemblies to be built.

MAJOR RATINGS AND CHARACTERISTICS					
SYMBOL	CHARACTERISTICS	VALUES T50RIA	VALUES T70RIA	VALUES T90RIA	UNITS
$I_{T(AV)}$	70 °C	50	70	90	A
$I_{T(RMS)}$		80	110	141	A
$I_{TSM}$	50 Hz	1310	1660	1780	A
	60 Hz	1370	1740	1870	
$I^2t$	50 Hz	8550	13 860	15 900	A <sup>2</sup> s
	60 Hz	7800	12 650	14 500	
$I^2\sqrt{t}$		85 500	138 500	159 100	A <sup>2</sup> √s
$V_{RRM}$	Range	100 to 1200	100 to 1200	100 to 1200	V
$T_J$			-40 to +125		°C

### ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS				
TYPE NUMBER	VOLTAGE CODE	$V_{RRM}/V_{DRM}$ , MAXIMUM REPETITIVE PEAK REVERSE AND PEAK OFF-STATE VOLTAGE V	$V_{RSM}$ , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	$I_{RRM}/I_{DRM}$ MAXIMUM AT $T_J = 25$ °C μA
VS-T50RIA VS-T70RIA VS-T90RIA	10	100	150	100
	20	200	300	
	40	400	500	
	60	600	700	
	80	800	900	
	100	1000	1100	
	120	1200	1300	



ON-STATE CONDUCTION								
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES T50RIA	VALUES T70RIA	VALUES T90RIA	UNITS	
Maximum average on-state current at case temperature	$I_{T(AV)}$	180° conduction, half sine wave		50	70	90	A	
				70	70	70	°C	
Maximum RMS on-state current	$I_{T(RMS)}$			80	110	141	A	
Maximum peak, one-cycle on-state, non-repetitive surge current	$I_{TSM}$	t = 10 ms	No voltage reappplied	Sine half wave, initial $T_J = T_{J \text{ maximum}}$	1310	1660	1780	A
		t = 8.3 ms			1370	1740	1870	
		t = 10 ms	100 % $V_{RRM}$ reappplied		1100	1400	1500	
		t = 8.3 ms			1150	1460	1570	
Maximum $I^2t$ for fusing	$I^2t$	t = 10 ms	No voltage reappplied	8550	13 860	15 900	$A^2s$	
		t = 8.3 ms		7800	12 650	14 500		
		t = 10 ms	100 % $V_{RRM}$ reappplied	6050	9800	11 250		
		t = 8.3 ms		5520	8950	10 270		
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	t = 0.1 to 10 ms, no voltage reappplied		85 500	138 500	159 100	$A^2\sqrt{s}$	
Low level value of threshold voltage	$V_{T(TO)1}$	$(16.7 \% \times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)})$ , $T_J$ maximum		0.97	0.77	0.78	V	
High level value of threshold voltage	$V_{T(TO)2}$	$(I > \pi \times I_{T(AV)})$ , $T_J$ maximum		1.13	0.88	0.88		
Low level value of on-state slope resistance	$r_{t1}$	$(16.7 \% \times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)})$ , $T_J$ maximum		4.1	3.6	2.9	$m\Omega$	
High level value of on-state slope resistance	$r_{t2}$	$(I > \pi \times I_{T(AV)})$ , $T_J$ maximum		3.3	3.2	2.6		
Maximum on-state voltage drop	$V_{TM}$	$I_{TM} = \pi \times I_{T(AV)}$ , $T_J = 25\text{ °C}$ , $t_p = 400\ \mu s$ square Average power = $V_{T(TO)} \times I_{T(AV)} + r_f \times (I_{T(RMS)})^2$		1.60	1.55	1.55	V	
Maximum forward voltage drop	$V_{FM}$	$I_{TM} = \pi \times I_{T(AV)}$ , $T_J = 25\text{ °C}$ , $t_p = 400\ \mu s$ square Average power = $V_{T(TO)} \times I_{T(AV)} + r_f \times (I_{T(RMS)})^2$		1.60	1.55	1.55	V	
Maximum holding current	$I_H$	Anode supply = 6 V, initial $I_T = 30\text{ A}$ , $T_J = 25\text{ °C}$		200	200	200	mA	
Maximum latching current	$I_L$	Anode supply = 6 V, resistive load = $10\ \Omega$ Gate pulse: 10 V, 100 $\mu s$ , $T_J = 25\text{ °C}$		400	400	400		

SWITCHING				
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Typical turn-on time	$t_{gd}$	$T_J = 25\text{ °C}$ , $V_d = 50\ \% V_{DRM}$ , $I_{TM} = 50\text{ A}$ $I_g = 500\text{ mA}$ , $t_r \leq 0.5$ , $t_p \geq 6\ \mu s$	0.9	$\mu s$
Typical reverse recovery time	$t_{rr}$	$T_J = 125\text{ °C}$ , $I_{TM} = 50\text{ A}$ , $t_p = 300\ \mu s$ , $dI/dt = 10\text{ A}/\mu s$	3	
Typical turn-off time	$t_q$	$T_J = T_J \text{ maximum}$ , $I_{TM} = 50\text{ A}$ , $t_p = 300\ \mu s$ , $dI/dt = 15\text{ A}/\mu s$ , $V_R = 100\text{ V}$ , linear to 80 % $V_{DRM}$	110	

BLOCKING				
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum peak reverse and off-state leakage current	$I_{RRM}$ , $I_{DRM}$	$T_J = T_J \text{ maximum}$	15	mA
RMS isolation voltage	$V_{ISOL}$	50 Hz, circuit to base, all terminals shorted, $T_J = 25\text{ °C}$ , $t = 1\text{ s}$	3500	V
Critical rate of rise of off-state voltage	$dV/dt$	$T_J = T_J \text{ maximum}$ , linear to 80 % rated $V_{DRM}$ <sup>(1)</sup>	500	V/ $\mu s$

**Note**

<sup>(1)</sup> Available with  $dV/dt = 1000\text{ V}/\mu s$ , to complete code add S90 i.e. T90RIA80S90



TRIGGERING						
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES T50RIA	VALUES T70RIA	VALUES T90RIA	UNITS
Maximum peak gate power	$P_{GM}$	$T_J = T_J$ maximum, $t_p \leq 5$ ms	10	12	12	W
Maximum average gate power	$P_{G(AV)}$	$T_J = T_J$ maximum, $f = 50$ Hz	2.5	3	3	W
Maximum peak gate current	$I_{GM}$	$T_J = T_J$ maximum, $t_p \leq 5$ ms	2.5	3	3	A
Maximum peak negative gate voltage	$-V_{GT}$		10	10	10	V
Maximum required DC gate voltage to trigger	$V_{GT}$	$T_J = -40$ °C	4.0	4.0	4.0	V
		$T_J = 25$ °C	2.5	2.5	2.5	
		$T_J = T_J$ maximum	1.5	1.5	1.5	
Maximum required DC gate current to trigger	$I_{GT}$	$T_J = -40$ °C	250	270	270	mA
		$T_J = 25$ °C	100	120	120	
		$T_J = T_J$ maximum	50	60	60	
Maximum gate voltage that will not trigger	$V_{GD}$	$T_J = T_J$ maximum, rated $V_{DRM}$ applied	0.2	0.2	0.2	V
Maximum gate current that will not trigger	$I_{GD}$		5.0	6.0	6.0	mA
Maximum rate of rise of turned-on current	di/dt	$V_D = 0.67$ rated $V_{DRM}$ , $I_{TM} = 2 \times$ rated di/dt $I_g = 400$ mA for T50RIA and $I_g = 500$ mA for T70RIA/T90RIA; $t_r < 0.5$ $\mu$ s, $t_p \geq 6$ $\mu$ s For repetitive value use 40 % non-repetitive per JEDEC® STD. RS397, 5.2.2.6	200	200	200	A/ $\mu$ s
			180	180	180	
			160	160	160	
			150	150	150	

THERMAL AND MECHANICAL SPECIFICATIONS						
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES T50RIA	VALUES T70RIA	VALUES T90RIA	UNITS
Maximum junction operating temperature range	$T_J$		-40 to +125			°C
Maximum storage temperature range	$T_{Stg}$		-40 to +150			
Maximum thermal resistance, junction to case per junction	$R_{thJC}$	DC operation	0.65	0.50	0.38	K/W
Maximum thermal resistance, case to heatsink	$R_{thCS}$	Mounting surface, smooth, flat and greased	0.2			
Mounting torque, $\pm 10$ % to heatsink terminals		Non-lubricated threads	M3.5 mounting screws <sup>(1)</sup>	1.3 $\pm$ 10 %		Nm
			M5 screw terminals	3 $\pm$ 10 %		
Approximate weight			54			g
Case style			D-55 (T-module)			

**Note**

<sup>(1)</sup> A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound

$\Delta R$ CONDUCTION PER JUNCTION											
DEVICES	SINUSOIDAL CONDUCTION AT $T_J$ MAXIMUM					RECTANGULAR CONDUCTION AT $T_J$ MAXIMUM					UNITS
	180°	120°	90°	60°	30°	180°	120°	90°	60°	30°	
T50RIA	0.08	0.10	0.13	0.19	0.31	0.06	0.10	0.14	0.20	0.32	K/W
T70RIA	0.07	0.08	0.10	0.14	0.24	0.05	0.08	0.11	0.15	0.24	
T90RIA	0.05	0.06	0.08	0.12	0.20	0.04	0.06	0.09	0.12	0.20	

**Note**

- Table shows the increment of thermal resistance  $R_{thJC}$  when devices operate at different conduction angles than DC

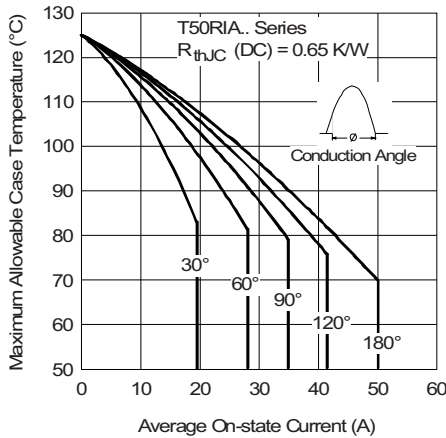


Fig. 1 - Current Ratings Characteristics

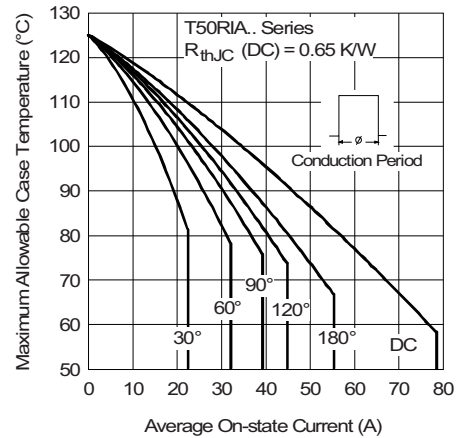


Fig. 2 - Current Ratings Characteristics

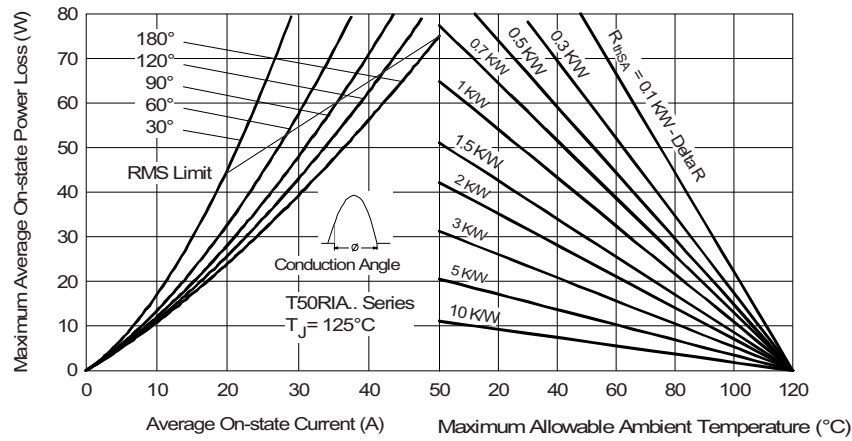


Fig. 3 - On-State Power Loss Characteristics

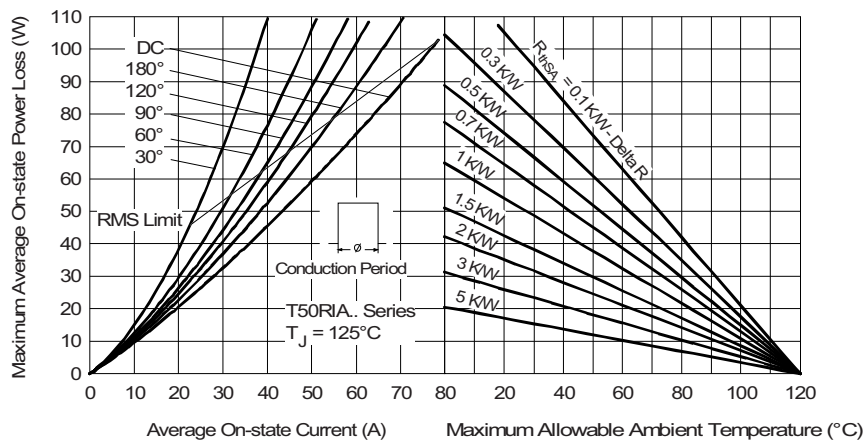


Fig. 4 - On-State Power Loss Characteristics

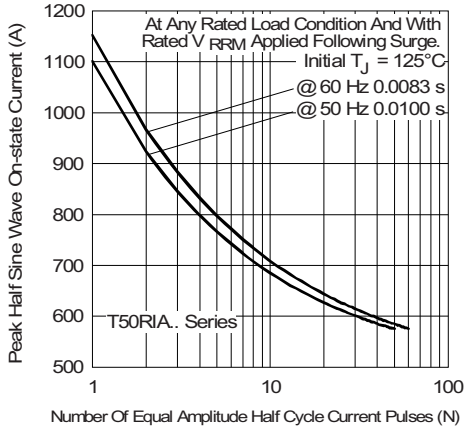


Fig. 5 - Maximum Non-Repetitive Surge Current

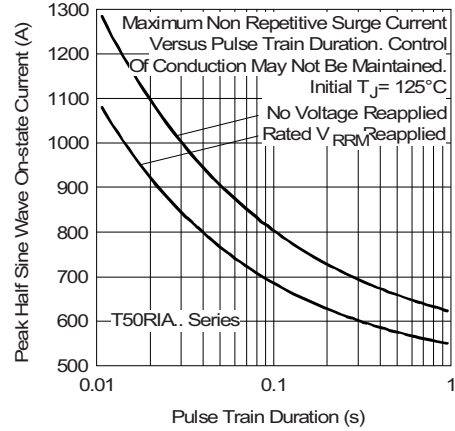


Fig. 6 - Maximum Non-Repetitive Surge Current

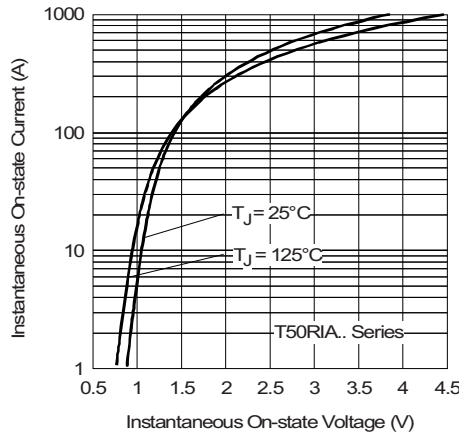


Fig. 7 - On-State Voltage Drop Characteristics

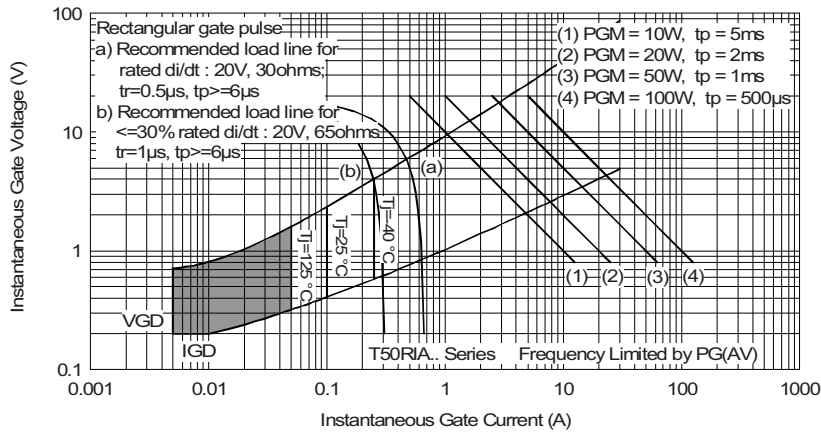


Fig. 8 - Gate Characteristics

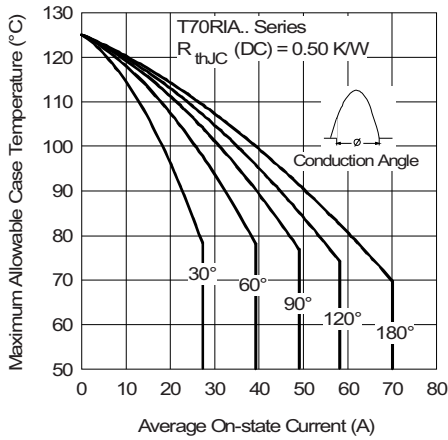


Fig. 9 - Current Ratings Characteristics

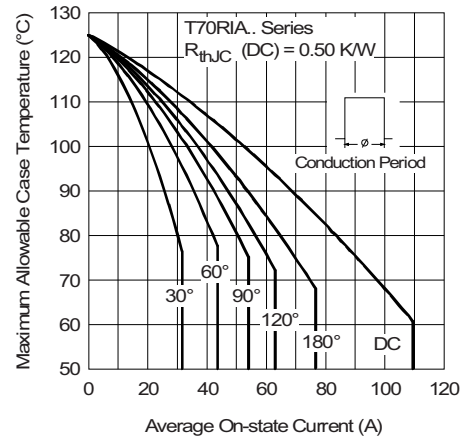


Fig. 10 - Current Ratings Characteristics

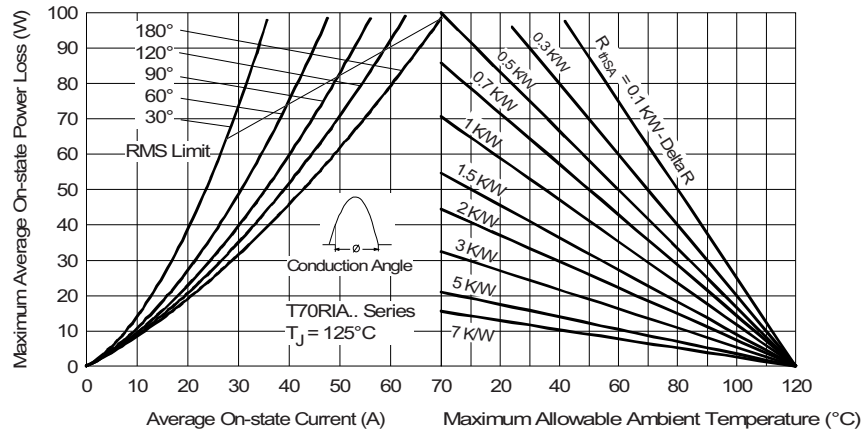


Fig. 11 - On-State Power Loss Characteristics

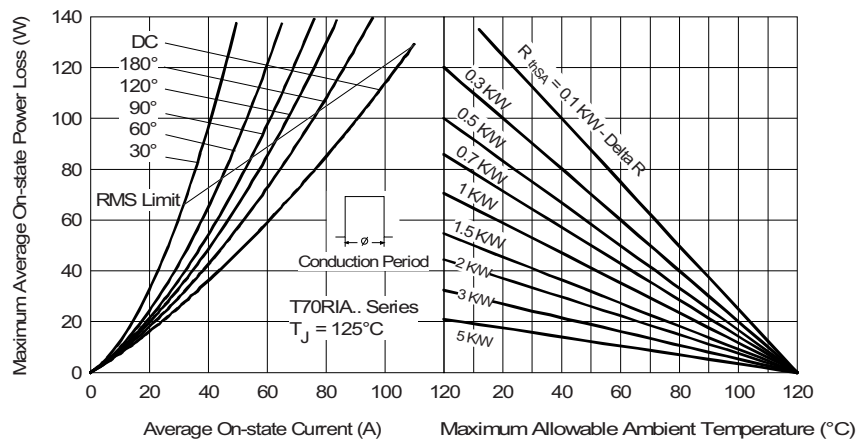


Fig. 12 - On-State Power Loss Characteristics

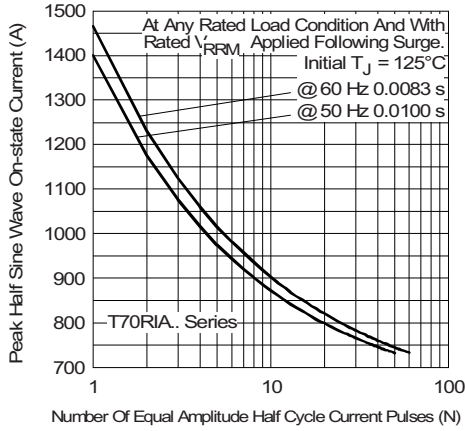


Fig. 13 - Maximum Non-Repetitive Surge Current

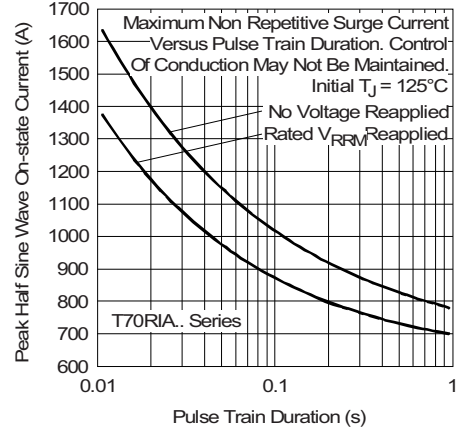


Fig. 14 - Maximum Non-Repetitive Surge Current

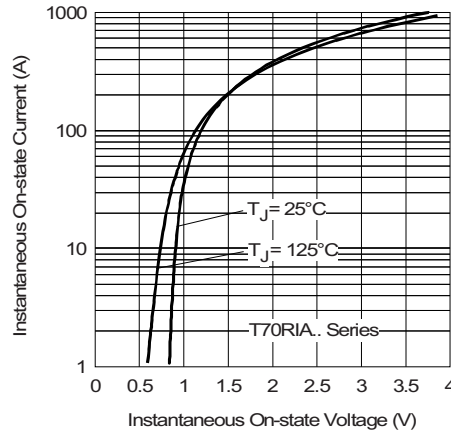


Fig. 15 - On-State Voltage Drop Characteristics

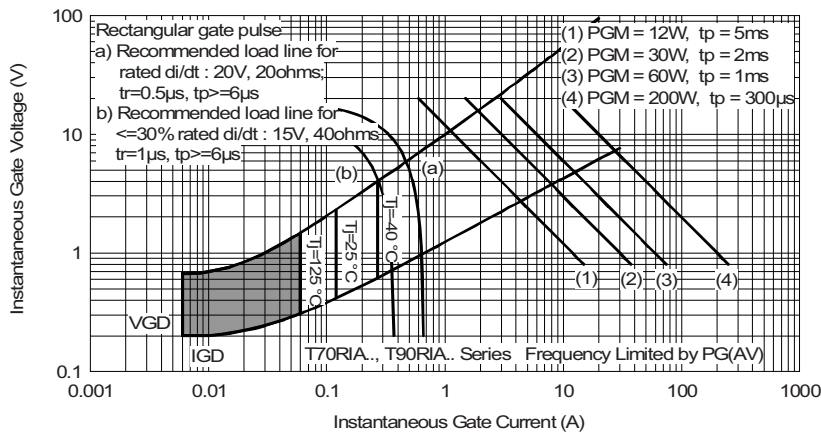


Fig. 16 - Gate Characteristics

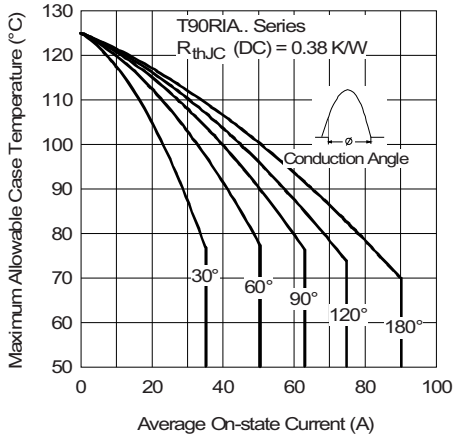


Fig. 17 - Current Ratings Characteristics

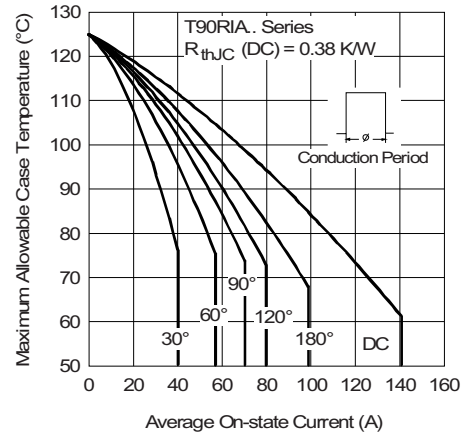


Fig. 18 - Current Ratings Characteristics

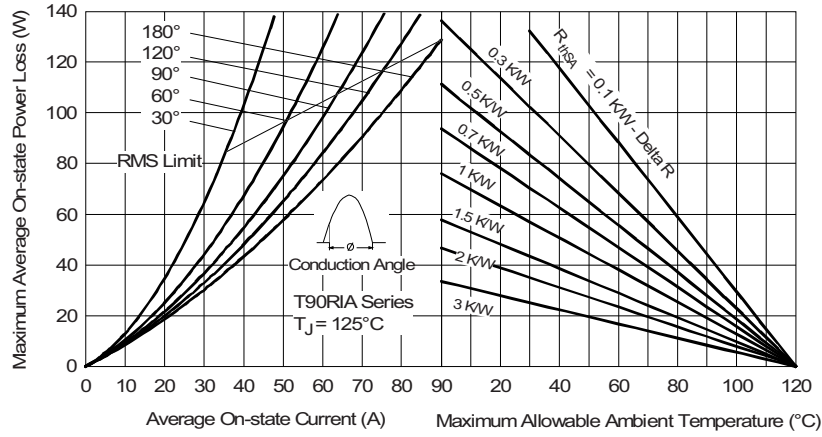


Fig. 19 - On-State Power Loss Characteristics

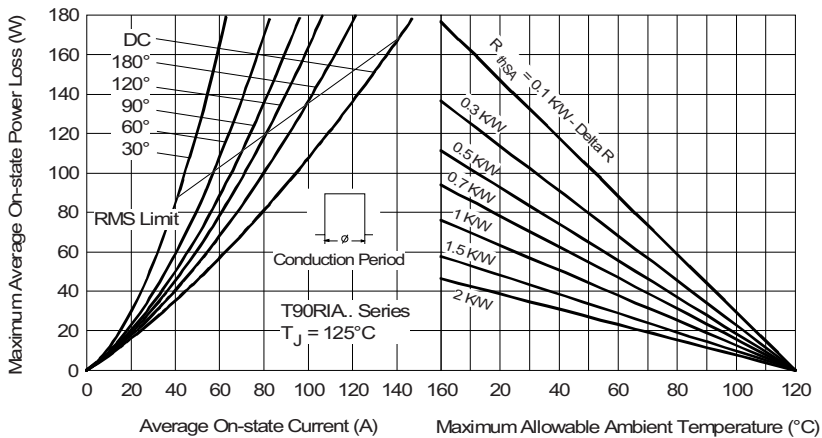


Fig. 20 - On-State Power Loss Characteristics

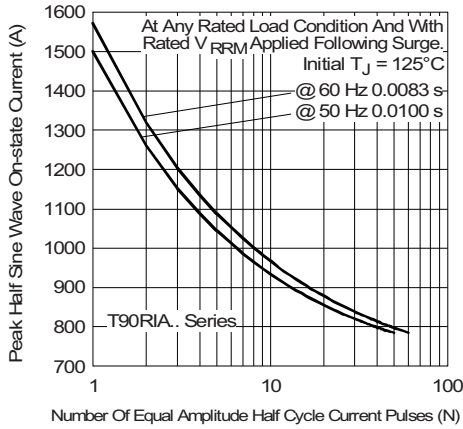


Fig. 21 - Maximum Non-Repetitive Surge Current

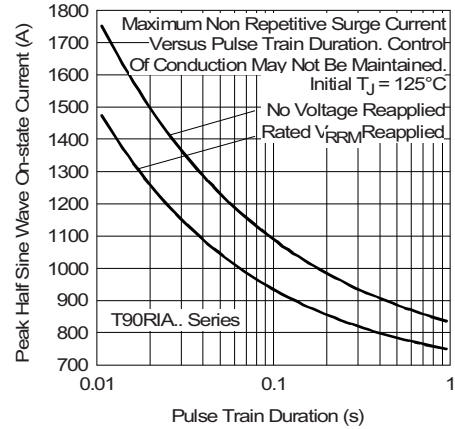


Fig. 22 - Maximum Non-Repetitive Surge Current

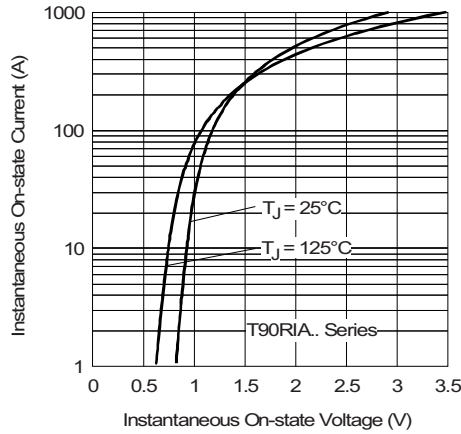


Fig. 23 - On-State Voltage Drop Characteristics


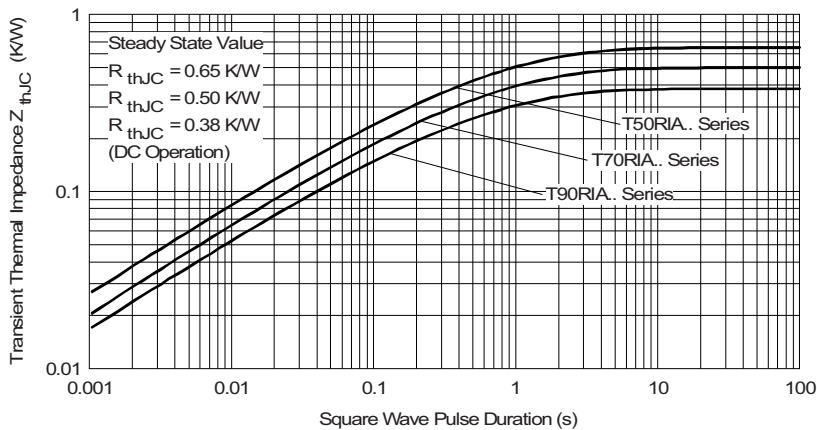


Fig. 24 - Thermal Impedance  $Z_{thJC}$  Characteristics



**ORDERING INFORMATION TABLE**

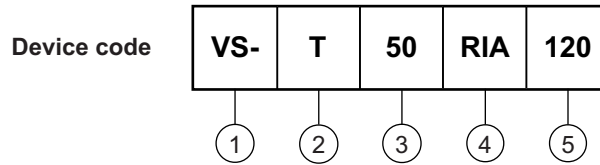

- 1** - Vishay Semiconductors product
- 2** - Module type
- 3** - Current rating
- 4** - Circuit configuration
- 5** - Voltage code x 10 =  $V_{RRM}$

<b>CIRCUIT CONFIGURATION</b>	
CIRCUIT DESCRIPTION	CIRCUIT DRAWING
Single SCR	

<b>LINKS TO RELATED DOCUMENTS</b>	
Dimensions	<a href="http://www.vishay.com/doc?95336">www.vishay.com/doc?95336</a>





## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.