


0159.500MR Datasheet

www.digi-electronics.com

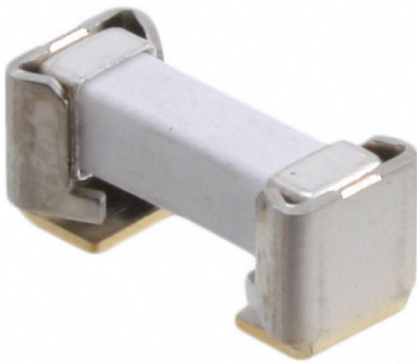

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	0159.500MR-DG
Manufacturer	Littelfuse Inc.
Manufacturer Product Number	0159.500MR
Description	FUSE BOARD MNT 500MA 600VAC 2SMD
Detailed Description	500mA 600 VAC Fuse Board Mount Surface Mount

This model 0159.500MR is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

0159.500MR

Series:

Telelink® 159

Mounting Type:

Surface Mount

Current Rating (Amps):

500mA

Response Time:

-

Features:

Clips Included

Approval Agency:

cURus

Breaking Capacity @ Rated Voltage:

60A

Size / Dimension:

0.429" L x 0.189" W x 0.189" H (10.90mm x 4.80mm x 4.80mm)

DC Cold Resistance:

0.56 Ohms

Manufacturer:

Littelfuse Inc.

Product Status:

Active

Fuse Type:

Board Mount

Voltage Rating - AC:

600 VAC

Applications:

Telecom

Class:

-

Operating Temperature:

-55°C ~ 125°C

Package / Case:

2-SMD, Square End Block with Clip

Melting I²t:

0.84

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Affected

HTSUS:

8536.10.0040

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

159 Series

Telelink® Fuse and Clip Assembly



Additional Information



Resources



Accessories



Samples

Agency Approvals

Agency	Agency File Number	Ampere Range
	E14721	0.5A - 2.0A
	N/A	0.5A - 2.0A
	N/A	0.5A - 2.0A

Electrical Characteristics for Series

% of Ampere Rating	Opening Time
100%	4 hours, Minimum
250%	1 sec., Minimum 120 secs., Maximum

Description

The 159 Series product is a metal fuse clip with pre-installed Littelfuse 461 Series TeleLink® fuse. This fuse and clip combination can be automatically installed in PC Boards in one efficient manufacturing operation. It permits quick and easy fuse replacement without exposing the PC Board and other components to risks of rework solder heat as required with direct surface mount fuses.

It meets UL 60950 power cross requirements and is designed to allow compliance with Telcordia GR-1089-CORE and TIA-968-A Surge Specifications. The product provides coordinated protection with Littelfuse SIDACTor® protection thyristors without series resistors.

Features & Benefits

- Offer low profile easily-replaceable fuse alternative compatible with automated PCB surface mount equipment
- Come supplied with surge resistant Littelfuse 461 series TeleLink® Slo-Blo® fuse
- Fuse designed to allow compliance with Telcordia GR-1089-CORE and TIA-968-A (formerly FCC Part 68) Surge Specifications
- Provide coordinated protection with Littelfuse SIDACTor® protection thyristor devices and GDTs, without series resistors
- RoHS compliant and Halogen Free
- Clip fully compatible with RoHS/lead-free solder alloys and higher temperature profiles associated with lead-free assembly
- Available in ratings of 0.5-2.0 Amperes

Applications

- Telecom equipment (POTS) applications such as modems, answering machines, telephones, fax machines, and security systems
- Network equipment, such as:
 - SLIC interface portion of Fiber to the Curb (FTTC) and Fiber to the Premises (FTTP)
 - Non-Fiber SLIC interface for Central Office (CO) locations and Remote Terminals (RT)
 - xDSL applications such as ADSL, ADSL2+, VDSL, and VDSL2+
 - Ethernet 10/100/1000BaseT
 - ISDN "U" interface
 - Baystation T1/E1/J1, T3 (DS3) trunk cards

159 Series

Telelink® Fuse and Clip Assembly


Electrical Specifications by Item

Ampere Rating (A)	Amp Code	Max Voltage Rating (V)	Interrupting Rating	Nominal Cold Resistance (Ohms)	Nominal Melting I ² t (A ² sec)	Agency Approvals		
						CE	UK CA	cULus
0.50	.500	600	60 A @600 VAC	0.560	0.840 ¹	x	x	x
1.25	1.25	600		.1040	16.5 ¹	x	x	x
2.00	002.	600		.0450	17.5 ¹	x	x	x

Notes:¹ I²t is calculated at 10 msec. or less. I²t at 10 times rated current has a typical value of: 24 A²sec (2.0A), 22 A²sec (1.25A), 1.3 A²sec (0.5A).

- Typical inductance < 40nH up to 500 MHz.
- Resistance changes 0.5% for every °C.
- Resistance is measured at 10% rated current.

Temperature Re-rating Curve

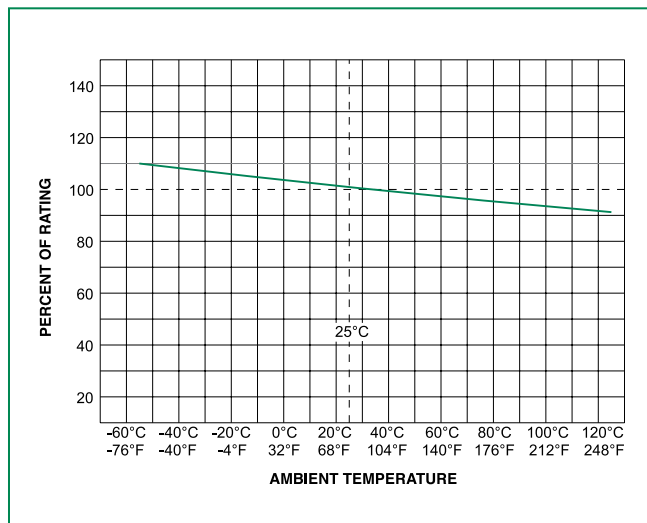


Note:

1. Re-rating depicted in this curve is in addition to the standard re-rating of 25% for continuous operation.

Maximum Temperature Rise

Telecom Nano ²⁰ Fuse	Temperature
04611.25	≤82°C (180°F)
0461002	≤50°C (122°F)

Average Time Current Curves

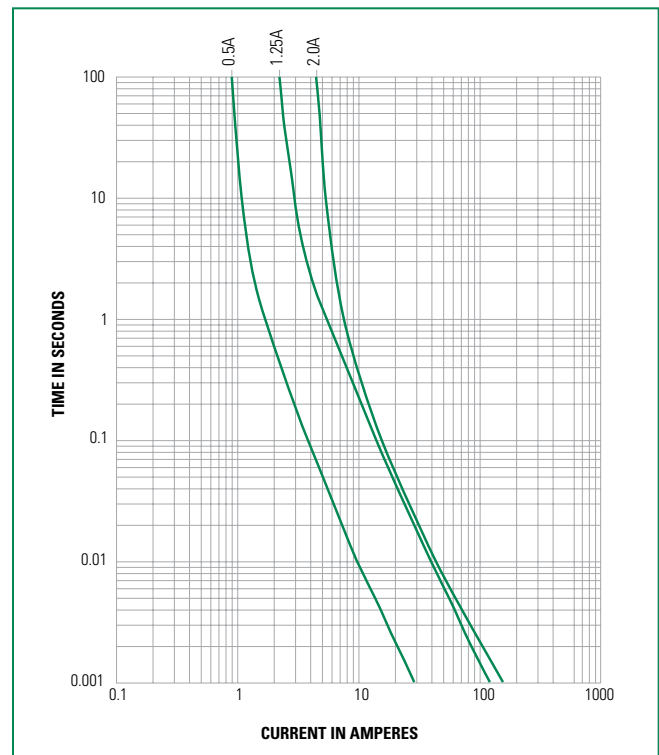

TIA-968-A (formerly FCC part 68) Surge Waveforms (fuse can not open during type B events)

Surge	Voltage (V)	Waveform (μs)	Current (A)	Repetitions	Recommended Fuse
Metallic A	800	10×560	100	1 ea. polarity	1.25
Longitudinal A	1500	10×160	200	1 ea. polarity	1.25
Metallic B	1000	9×720	25	1 ea. polarity	1.25
Longitudinal B	1500	9×720	37.5	1 ea. polarity	1.25

Note: For the type A events the 0.5 fuse will open, providing non-operational compliance. The 1.25 & 2.0 will not open, providing for operational compliance with TIA-968-A type A surge events.

159 Series

Telelink® Fuse and Clip Assembly

GR 1089 Inter-building requirements

GR 1089 1st level lighting surge inter-building

(Equipment under test can not be damaged and must continue to operate properly)

Surge	Minimum Peak Voltage (V)	Minimum Peak Current (A)	Max. Rise/Min. Decay (µs)	Repetitions Each Polarity	Fuse Choices
1	600	100	10/1000	25	1.25, 2.0
2	1000	100	10/360	25	1.25, 2.0
3	1000	100	10/1000	25	1.25, 2.0
4	2500	500	2/10	10	1.25, 2.0
5	1000	25	10/360	5	0.5, 1.25, 2.0

If sufficient series resistance is used, then the 0.5 fuse may be used in test conditions 1-4.

GR 1089 AC power fault 1st level inter-building

(fuse not allowed to open)

Test	Vrms	Short Circuit Current (A)	Hits	Duration	Primary Protector	Fuse Choices
1	50	.33	1	15 min.	removed	1.25, 2.0
2	100	.17	1	15 min.	removed	1.25, 2.0
3	200,400, 600	1	60	1 sec.	removed	1.25, 2.0
4	1000	1	60	1 sec.	operative	1.25, 2.0
5	Diagram	Diagram	60	5 secs.	removed	1.25, 2.0
6	600	0.5	1	30 secs.	removed	1.25, 2.0
7	440	2.2	5	2 secs.	removed	1.25, 2.0
8	600	3	1	1.1 secs.	removed	1.25, 2.0
9	1000	5	1	0.4 sec.	in place	1.25, 2.0

GR 1089 2nd level lightning surge telecom port

(Equipment under test shall not become a fire, fragmentation, or electrical safety hazard)

Surge	Minimum Peak Voltage (V)	Minimum Peak Current (A)	Max. Rise/Min. Decay (µs)	Repetitions Each Polarity	Fuse Choices
1	5000	500	2/10	1	0.5, 1.25, 2.0
Alternative	5000	500/8=625	8/10	1	0.5, 1.25, 2.0

The 0.5 fuse will open during these test conditions. The 1.25 & 2.0 will not open thus providing operational compliance.

GR 1089 AC power fault 2nd level

(fuse can open but must open in a safe and controlled

Test Circuite	Vrms	Short (A)	Duration	Fuse
1	120,277	25	15 min.	0.5, 1.25, 2.0
2	600	60	5 secs.	0.5, 1.25, 2.0
3	600	7	5 secs.	0.5, 1.25, 2.0
4	100-600	2.2	15 min..	0.5, 1.25, 2.0
5	Diagram	Diagram	15 min.	0.5, 1.25, 2.0

Fuse must open before wiring simulator fuse (MDL 2.0).

UL60950 Requirements

UL 60950 (EN 60950, formerly UL 1950) Power Cross Test (L=Longitudinal, M=Metallic)

Test Number	Voltage (V)	Current (A)	Time	Fuse Choices
L1	600	40	1.5 secs.	0.5, 1.25, 2.0
L2	600	7	5 secs.	0.5, 1.25, 2.0
L3	600	2.2	30 min.	0.5, 1.25, 2.0
L4	200	2.2	30 min.	0.5, 1.25, 2.0
L5	120	25	30 min.	0.5, 1.25, 2.0
M1	600	40	1.5 secs.	0.5, 1.25, 2.0
M2	600	7	5 secs.	0.5, 1.25, 2.0
M3	600	2.2	30 min.	0.5, 1.25, 2.0
M4	600	2.2	30 min.	0.5, 1.25, 2.0

Selection of test number depends on current limiting F fire enclosure/spacing of end product

- 26 AWG line cord removes L1/M1 test requirement
 - L5 conducted only if product does not pass section 6.1.2
 - L2,M2,L3,M3,L4,M4 conducted if not in a fire enclosure
- Fuse must open before the wiring simulator fuse (MDL 2.0).

UL 60950 (EN 60950, formerly UL 1950) Impulse Test and Steady-State Electric Strength Test


Test	Voltage (V)	Current (A)	Waveform	Repetitions	Fuse Choices
Impulse					
For handheld units	2500	62.5	10x700ms	+ 10 w/60 secs. rest	0.5, 1.25, 2.0
Non handheld	1500	37.5	10x700ms	+ 10 w/60 secs. rest	0.5, 1.25, 2.0
Steady-State					
For handheld units	1500		60Hz		0.5, 1.25, 2.0
Non handheld	1000		60Hz		0.5, 1.25, 2.0

159 Series

Telelink® Fuse and Clip Assembly

Soldering Parameters


Reflow Condition		Pb – free assembly
Pre Heat	- Temperature Min ($T_{s(min)}$)	150°C
	- Temperature Max ($T_{s(max)}$)	200°C
	- Time (Min to Max) (t_s)	60 – 120 seconds
Average Ramp-up Rate (Liquidus Temp (T_L) to peak)		3°C/second max.
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max.
Reflow	- Temperature (T_L) (Liquidus)	217°C
	- Temperature (t_L)	60 – 90 seconds
Peak Temperature (T_p)		260 ^{+0/-5} °C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max.
Time 25°C to peak Temperature (T_p)		8 minutes max.
Do not exceed		260°C

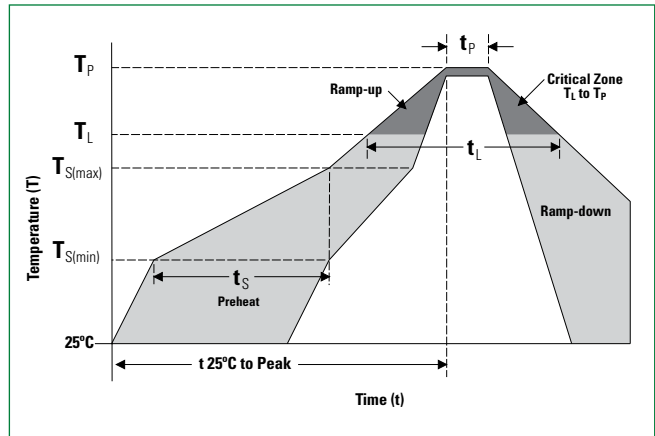


Product Characteristics

Materials	Fuse Body: Ceramic Fuse Caps/Terminals: Silver-plated Brass Clip Base: Gold-plated Clip Terminals: Nickel-plated
Product Marking	Brand Logo, Current Rating, 'T'
Insulation Resistance (after opening)	MIL-STD-202, Method 302, Test condition A (10,000 ohms, minimum)
Operating Temperature	-55°C to 125°C with proper re-rating
Humidity Test	85°C/ 85% RH, 1000 hours
Solderability	MIL-STD-202, Method 208/IPC EIA J-STD-002, Test Condition A
Resistance to Solvents	MIL-STD-202, Method 215 (3 solvent types)
Thermal Shock	MIL-STD-202, Method 107, Test Condition B3 (95 cycles -65°C to +125°C)
Mechanical Shock	MIL-STD-202, Method 213, Test Condition I (100G's peak for 6 msecs.)
Vibration	MIL-STD-202, Method 201, (10-55 Hz)
Moisture Resistance	MIL-STD-202, Method 106, High Humidity (90-98% RH), Heat (65°C)
Salt Spray/Atmosphere	MIL-STD-202, Method 101, Test Condition B (48 hours)
Terminal Attachment	MIL-STD-202, Method 211, Test Condition A, 5 lbs applied to end caps


Part Numbering System

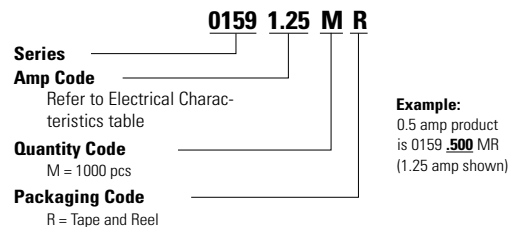

Dimensions

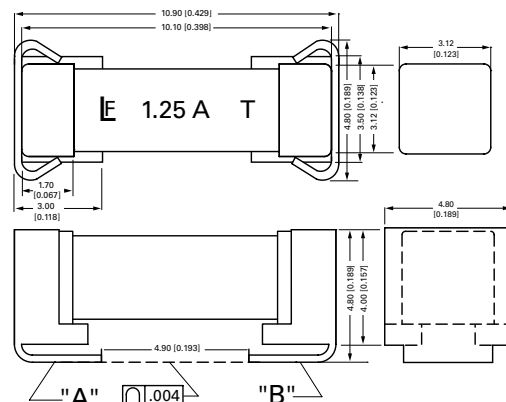

Recommended Pad Layout

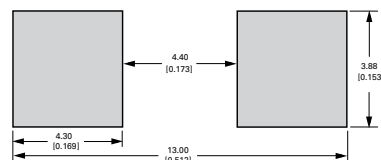

Packaging

Packaging Option	Packaging Specification	Quantity	Quantity & Packaging Code
24mm Tape and Reel	EIA-481, IEC 60286-3	1000	MR

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littelfuse.com/disclaimer-electronics.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.