

# 0805L050WR Datasheet

[www.digi-electronics.com](http://www.digi-electronics.com)



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	0805L050WR-DG
Manufacturer	<a href="#">Littelfuse Inc.</a>
Manufacturer Product Number	0805L050WR
Description	PTC RESET FUSE 6V 500MA 0805
Detailed Description	Polymeric PTC Resettable Fuse 6V 500 mA 1h Surface Mount 0805 (2012 Metric), Concave

This model 0805L050WR is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

0805L050WR

Series:

POLY-FUSE®, 0805L

Type:

Polymeric

Current - Hold (Ih) (Max):

500 mA

Current - Max:

100 A

Resistance - Initial (Ri) (Min):

150 mOhms

Operating Temperature:

-40°C ~ 85°C

Mounting Type:

Surface Mount

Size / Dimension:

0.083" L x 0.053" W (2.10mm x 1.35mm)

Thickness (Max):

0.049" (1.25mm)

Approval Agency:

cURus, TUV

Manufacturer:

Littelfuse Inc.

Product Status:

Active

Voltage - Max:

6V

Current - Trip (It):

1 A

Time to Trip:

100 ms

Resistance - Post Trip (R1) (Max):

850 mOhms

Ratings:

AEC-Q200

Package / Case:

0805 (2012 Metric), Concave

Height - Seated (Max):

-

Lead Spacing:

-

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8533.40.8070

Moisture Sensitivity Level (MSL):


1 (Unlimited)

ECCN:

EAR99

# 0805L Series

## Surface Mount

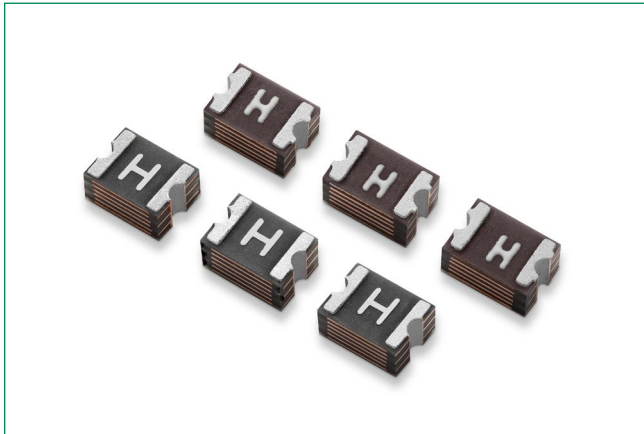

### Description

The 0805L Series PTC provides surface mount overcurrent protection for applications where space is at a premium and resettable protection is desired.

### Features & Benefits

- RoHS compliant, lead-free and halogen-free
- Fast response to fault currents
- Compact design saves board space
- Low resistance
- Low-profile
- Compatible with high temperature solders

### Web Resources



Download ECAD models, order samples, and find technical resources at [www.littelfuse.com](http://www.littelfuse.com)

### Applications

- USB peripherals
- Disk drives
- CD-ROMs
- Plug and play protection for motherboards and peripherals
- Mobile phones - battery and port protection
- Disk drives
- PDAs / digital cameras
- Game console port protection

### Agency Approvals

Agency	Agency File Number
	E183209
	R50119118

### Electrical Characteristics

Part Number	Marking	$I_{hold}$ (A)	$I_{trip}$ (A)	$V_{max}$ (Vdc)	$I_{max}$ (A)	$P_d$ typ. (W)	Maximum Time To Trip		Resistance		Agency Approvals	
							Current (A)	Time (Sec.)	$R_{min}$ ( $\Omega$ )	$R_{1max}$ ( $\Omega$ )		
0805L002	▲	0.02	0.06	63	40	0.5	0.10	1.50	12.000	70.000	X	X
0805L005/30	f3	0.05	0.15	30	40	0.50	0.25	1.50	3.600	20.000	X	X
0805L010	A	0.10	0.30	15	100	0.5	0.50	1.50	1.000	6.000	X	X
0805L010/24	J	0.10	0.30	24	100	0.5	0.50	1.50	1.500	6.000	X	X
0805L020	C	0.20	0.50	9	100	0.5	8.00	0.02	0.650	3.500	X	X
0805L020/16	C1	0.20	0.50	16	100	1.2	8.00	0.50	0.500	3.500	X	X
0805L020/24	C2	0.20	0.50	24	100	1.2	8.00	0.50	0.500	3.500	X	X
0805L035	E	0.35	0.75	6	100	0.5	8.00	0.10	0.250	1.200	X	X
0805L050 <sup>1</sup>	F	0.50	1.00	6	100	0.5	8.00	0.10	0.150	0.850	X	X
0805L075	G	0.75	1.50	6	40	0.6	8.00	0.20	0.090	0.350	X	X
0805L100	N	1.00	1.95	6	40	0.6	8.00	0.30	0.060	0.210	X	X
0805L110	H	1.10	2.00	6	100	0.8	8.00	0.10	0.050	0.160	X	X

$I_{hold}$  = Hold current: maximum current device will pass without tripping in 20°C still air.

$I_{trip}$  = Trip current: minimum current at which the device will trip in 20°C still air.

$V_{max}$  = Maximum voltage device can withstand without damage at rated current ( $I_{max}$ )

$I_{max}$  = Maximum fault current device can withstand without damage at rated voltage ( $V_{max}$ )

$P_d$  = Power dissipated from device when in the tripped state at 20°C still air.

$R_{min}$  = Minimum resistance of device in initial (un-soldered) state.

$R_{typ}$  = Typical resistance of device in initial (un-soldered) state.

$R_{1max}$  = Maximum resistance of device at 20°C measured one hour after tripping or reflow soldering of 260°C for 20 sec.

**Caution:** Operation beyond the specified rating may result in damage and possible arcing and flame.

<sup>1</sup> Typical rating was selected to represent the whole series for AEC-Q200 test.

# 0805L Series


## Surface Mount

### Temperature Rerating

Part Number	Ambient Operation Temperature								
	-40°C	-20°C	0°C	20°C	40°C	50°C	60°C	70°C	85°C
	Hold Current (A)								
0805L002	0.030	0.027	0.024	0.020	0.017	0.016	0.014	0.012	0.010
0805L005/30	0.077	0.069	0.061	0.050	0.042	0.038	0.033	0.028	0.021
0805L010	0.14	0.12	0.11	0.10	0.08	0.07	0.06	0.05	0.03
0805L010/24	0.14	0.12	0.11	0.10	0.08	0.07	0.06	0.05	0.03
0805L020	0.28	0.25	0.23	0.20	0.17	0.14	0.12	0.10	0.07
0805L020/16	0.30	0.27	0.24	0.20	0.17	0.16	0.14	0.13	0.10
0805L020/24	0.30	0.27	0.24	0.20	0.17	0.16	0.14	0.13	0.10
0805L035	0.47	0.44	0.39	0.35	0.30	0.27	0.24	0.20	0.14
0805L050	0.68	0.62	0.55	0.50	0.40	0.37	0.33	0.29	0.23
0805L075	1.00	0.90	0.79	0.75	0.63	0.57	0.53	0.41	0.34
0805L100	1.35	1.25	1.10	1.00	0.82	0.74	0.65	0.55	0.42
0805L110	1.45	1.35	1.20	1.10	0.92	0.84	0.75	0.65	0.52


Notes: The temperature rerating data is only for reference, please contact Littelfuse technical support for detail temperature rerating information.

### Average Time Current Curves

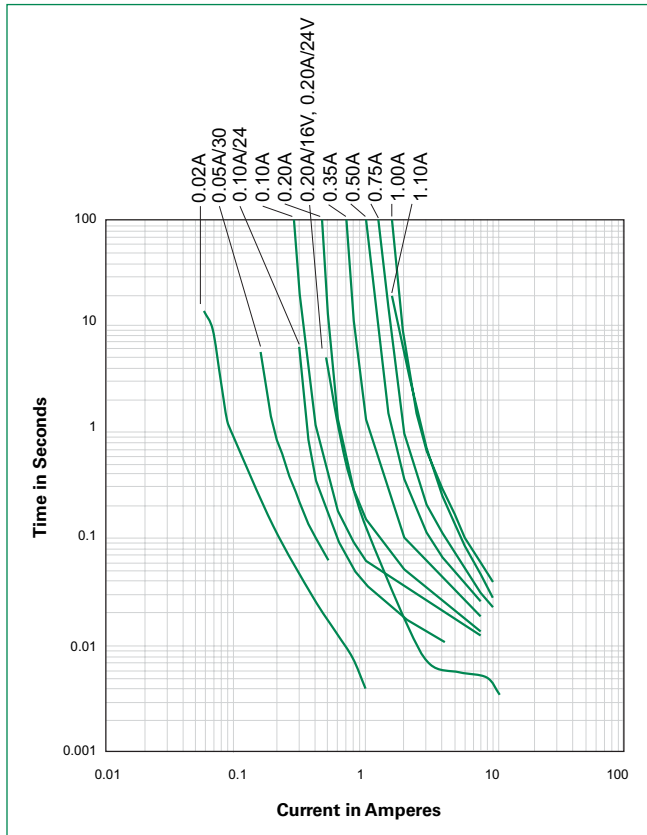

The average time current curves and Temperature Rerating curve performance is affected by a number of variables, and these curves provided as guidance only. Customer must verify the performance in their application.

### Temperature Rerating Curve

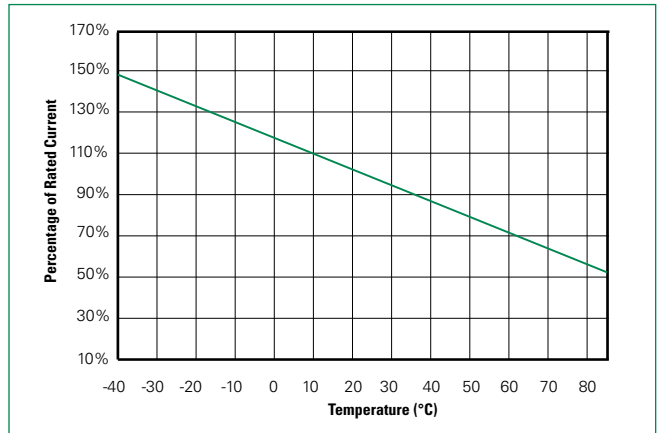


Note: Typical Temperature rerating curve, refer to table for derating data

# 0805L Series

## Surface Mount

### Soldering Parameters

<b>Profile Feature</b>		Pb-Free Assembly
<b>Average Ramp-Up Rate (<math>T_{S(max)}</math> to <math>T_p</math>)</b>		3°C/second max
<b>Pre Heat:</b>	<b>Temperature Min (<math>T_{s(min)}</math>)</b>	150°C
	<b>Temperature Max (<math>T_{s(max)}</math>)</b>	200°C
	<b>Time (Min to Max) (<math>t_s</math>)</b>	60 – 180 secs
<b>Time Maintained Above:</b>	<b>Temperature (<math>T_L</math>)</b>	217°C
	<b>Temperature (<math>t_l</math>)</b>	60 – 150 seconds
<b>Peak / Classification Temperature (<math>T_p</math>)</b>		260 <sup>+0/-5</sup> °C
<b>Time within 5°C of actual peak Temperature (<math>t_p</math>)</b>		20 – 40 seconds
<b>Ramp-down Rate</b>		6°C/second max
<b>Time 25°C to peak Temperature (<math>T_p</math>)</b>		8 minutes Max.

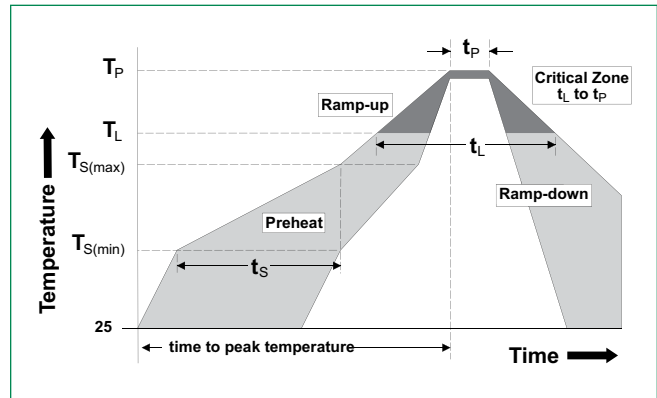

### Physical Specifications

<b>Terminal Material</b>	Solder-Plated Copper (Solder Material: Matte Tin (Sn))
<b>Lead Solderability</b>	Meets EIA Specification RS186-9E, ANSI/J-STD-002, Category 3


### Environmental Specifications

<b>Operating Temperature</b>	-40°C to +85°C
<b>Maximum Device Surface Temperature in Tripped State</b>	125°C
<b>Passive Aging</b>	+85°C, 1000 hours -/+5% typical resistance change
<b>Humidity Aging</b>	+85°C, 85%, R.H., 1000 hours -/+5% typical resistance change
<b>Thermal Shock</b>	MIL-STD-202, Method 107 +85°C/-40°C 20 times -30% typical resistance change
<b>Solvent Resistance</b>	MIL-STD-202, Method 215 No change
<b>Vibration</b>	MIL-STD-883, Method 2007, Condition A No change
<b>Moisture Sensitivity Level</b>	Level 1, J-STD-020

# 0805L Series


## Surface Mount

### Dimensions

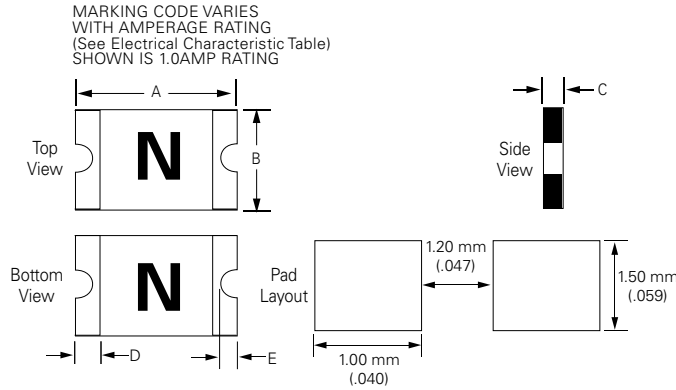

Part Number	A				B				C				D				E			
	Inches		mm		Inches		mm		Inches		mm		Inches		mm		Inches		mm	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
0805L002	0.08	0.09	2.00	2.20	0.05	0.06	1.20	1.50	0.03	0.05	0.75	1.25	0.01	0.02	0.20	0.55	0.002	0.02	0.05	0.45
0805L005/30	0.08	0.09	2.00	2.20	0.05	0.06	1.20	1.50	0.03	0.05	0.75	1.25	0.01	0.02	0.20	0.55	0.002	0.02	0.05	0.45
0805L010	0.08	0.09	2.00	2.20	0.05	0.06	1.20	1.50	0.02	0.04	0.55	1.00	0.01	0.02	0.20	0.55	0.002	0.02	0.05	0.45
0805L010/24	0.08	0.09	2.00	2.20	0.05	0.06	1.20	1.50	0.02	0.04	0.55	1.00	0.01	0.02	0.20	0.55	0.002	0.02	0.05	0.45
0805L020	0.08	0.09	2.00	2.20	0.05	0.06	1.20	1.50	0.02	0.04	0.55	1.00	0.01	0.02	0.20	0.55	0.002	0.02	0.05	0.45
0805L020/16	0.08	0.09	2.00	2.20	0.05	0.06	1.20	1.50	0.02	0.03	0.45	0.75	0.01	0.02	0.20	0.55	0.002	0.02	0.05	0.45
0805L020/24	0.08	0.09	2.00	2.20	0.05	0.06	1.20	1.50	0.02	0.03	0.45	0.75	0.01	0.02	0.20	0.55	0.002	0.02	0.05	0.45
0805L035	0.08	0.09	2.00	2.20	0.05	0.06	1.20	1.50	0.02	0.03	0.45	0.75	0.01	0.02	0.20	0.55	0.002	0.02	0.05	0.45
0805L050	0.08	0.09	2.00	2.20	0.05	0.06	1.20	1.50	0.03	0.05	0.75	1.25	0.01	0.02	0.20	0.55	0.002	0.02	0.05	0.45
0805L075	0.08	0.09	2.00	2.20	0.05	0.06	1.20	1.50	0.03	0.05	0.75	1.25	0.01	0.02	0.20	0.55	0.002	0.02	0.05	0.45
0805L100	0.08	0.09	2.00	2.20	0.05	0.06	1.20	1.50	0.02	0.07	0.50	1.80	0.01	0.02	0.20	0.55	0.002	0.02	0.05	0.45
0805L110	0.08	0.09	2.00	2.20	0.05	0.06	1.20	1.50	0.03	0.06	0.80	1.40	0.01	0.02	0.20	0.55	0.002	0.02	0.05	0.45

### Part Ordering Number System

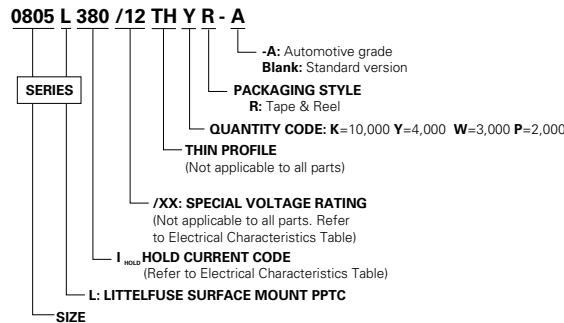

### Packaging

Part Number	Ordering Number	Halogen Free	I <sub>hold</sub> (A)	I <sub>hold</sub> Code	Packaging Option	Quantity	Quantity & Packaging Codes
0805L002	0805L002YR	Yes	0.02	002	Tape and Reel	4000	YR
0805L005/30	0805L005/30YR	Yes	0.05	005	Tape and Reel	4000	YR
0805L010	0805L010YR	Yes	0.10	010	Tape and Reel	4000	YR
0805L010/24	0805L010/24YR	Yes	0.10	010	Tape and Reel	4000	YR
0805L020	0805L020YR	Yes	0.20	020	Tape and Reel	4000	YR
0805L020/16	0805L020/16YR	Yes	0.20	020	Tape and Reel	4000	YR
0805L020/24	0805L020/24YR	Yes	0.20	020	Tape and Reel	4000	YR
0805L035	0805L035YR	Yes	0.35	035	Tape and Reel	4000	YR
0805L050	0805L050WR	Yes	0.50	050	Tape and Reel	3000	WR
0805L075	0805L075WR	Yes	0.75	075	Tape and Reel	3000	WR
0805L100	0805L100WR	Yes	1.00	100	Tape and Reel	3000	WR
0805L110	0805L110WR	Yes	1.10	110	Tape and Reel	3000	WR



# 0805L Series

## Surface Mount

### Tape and Reel Specifications

TAPE SPECIFICATIONS: EIA-481-1 (mm)			
	0805L010 0805L020 0805L035 0805L010/24 0805L020/16 0805L020/24	0805L002 0805L050 0805L075 0805L100 0805L005/30	0805L110
W	8.00+/-0.10	8.00+/-0.30	8.00+/-0.30
F	3.50+/-0.05	3.50+/-0.05	3.50+/-0.05
E <sub>1</sub>	1.75+/-0.10	1.75+/-0.10	1.75+/-0.10
D <sub>0</sub>	1.55+/-0.05	1.55+/-0.05	1.55+/-0.05
D <sub>1</sub>	1.00 (min)	1.00+/-0.10	1.00+/-0.10
P <sub>0</sub>	4.00+/-0.08	4.00+/-0.10	4.00+/-0.10
P <sub>1</sub>	4.00+/-0.10	4.00+/-0.10	4.00+/-0.10
P <sub>2</sub>	2.00+/-0.05	2.00+/-0.05	2.00+/-0.05
A <sub>0</sub>	1.60+/-0.10	1.65+/-0.10	1.65+/-0.10
B <sub>0</sub>	2.30+/-0.10	2.35+/-0.10	2.35+/-0.10
T	0.25+/-0.10	0.20+/-0.10	0.25+/-0.10
K <sub>0</sub>	0.90+/-0.10	1.05+/-0.10	1.50+/-0.10
Leader min.	390	390	390
Trailer min.	160	160	160

REEL DIMENSIONS: EIA-481-1 (mm)	
C	Ø178+/-1.0
D	ø60.2+/-0.5
H	11.0+/-0.5
W	9.0+/-1.5

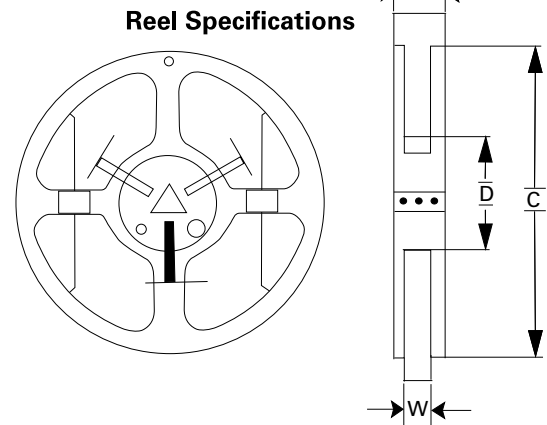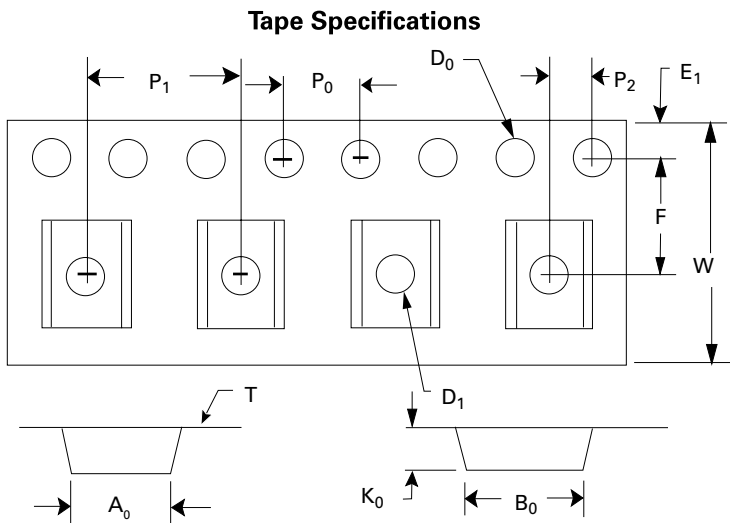

#### Warning

- Users should independently evaluate the suitability of and test each product selected for their own application.
- Operation beyond the maximum ratings or improper use may result in device damage and possible electrical arcing and flame.
- These devices are intended for protection against damage caused by occasional overcurrent or overtemperature fault conditions and should not be used when repeated fault conditions or prolonged trip events are anticipated.
- Contamination of the PPTC material with certain silicone-based oils or some aggressive solvents can adversely impact the performance of the devices.
- Device performance can be impacted negatively if devices are handled in a manner inconsistent with recommended electronic, thermal, and mechanical procedures for electronic components.
- PPTC devices are not recommended for installation in applications where the device is constrained such that its PTC properties are inhibited, for example in rigid potting materials or in rigid housings, which lack adequate clearance to accommodate device expansion.
- Operation in circuits with a large inductance can generate a circuit voltage (Ldi/dt) above the rated voltage of the device.

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we strictly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.