


MCR72-8TG Datasheet

www.digi-electronics.com

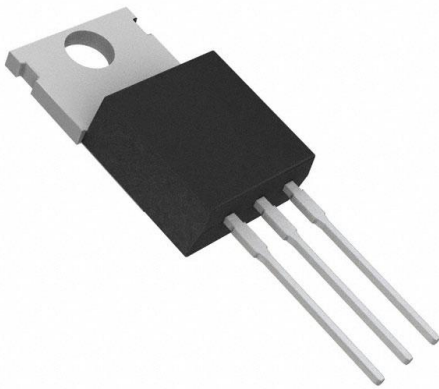

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	MCR72-8TG-DG
Manufacturer	Littelfuse Inc.
Manufacturer Product Number	MCR72-8TG
Description	SCR 600V 8A TO220AB
Detailed Description	SCR 600 V 8 A Sensitive Gate Through Hole TO-220A B

This model MCR72-8TG is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

MCR72-8TG

Series:

-

Voltage - Off State:

600 V

Current - Gate Trigger (Igt) (Max):

200 μ A

Current - On State (It (RMS)) (Max):

8 A

Current - Off State (Max):

10 μ A

SCR Type:

Sensitive Gate

Mounting Type:

Through Hole

Supplier Device Package:

TO-220AB

Manufacturer:

Littelfuse Inc.

Product Status:

Active

Voltage - Gate Trigger (Vgt) (Max):

1.5 V

Voltage - On State (Vtm) (Max):

2 V

Current - Hold (Ih) (Max):

6 mA

Current - Non Rep. Surge 50, 60Hz (I_{tsm}):

100A @ 60Hz

Operating Temperature:

-40°C ~ 110°C

Package / Case:

TO-220-3

Base Product Number:

MCR72

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8541.30.0080


Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

MCR72-3, MCR72-6, MCR72-8

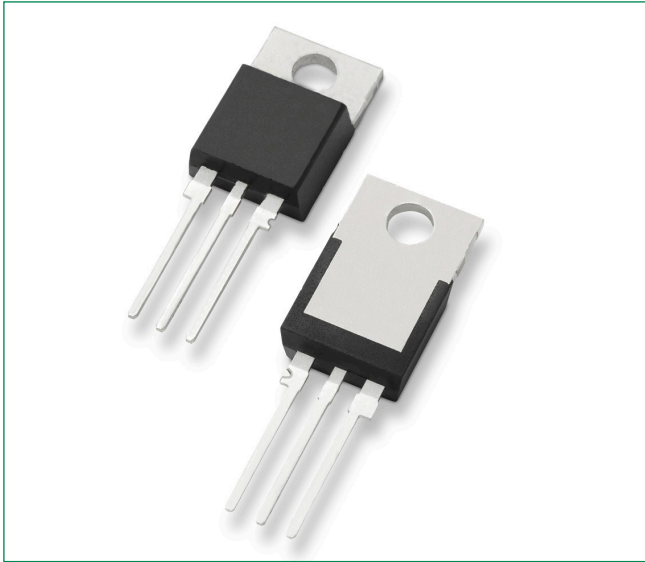


Description

Designed for industrial and consumer applications such as temperature, light and speed control; process and remote controls; warning systems; capacitive discharge circuits and MPU interface.

Features

- Center Gate Geometry for Uniform Current Density
- All Diffused and Glass-Passivated Junctions for Parameter Uniformity and Stability
- Small, Rugged Thermowatt Construction for Low Thermal Resistance, High Heat Dissipation and Durability
- Low Trigger Currents, 200 μ A Maximum for Direct Driving from Integrated Circuits
- These are Pb-Free Devices

Pin Out

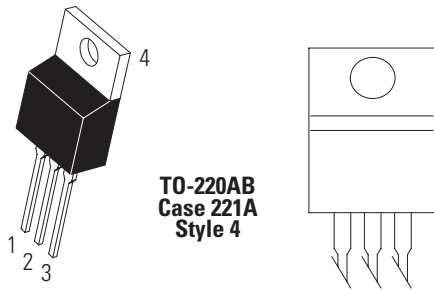

Functional Diagram



Additional Information



Datasheet



Resources



Samples

Thyristors

8Amps Sen SCR

Maximum Ratings ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
Peak Repetitive Off-State Voltage (Note 1) (- 40 to 110°C, Sine Wave, 50 to 60 Hz, Gate Open)	MCR72-3 MCR72-6 MCR72-8	V_{DRM} V_{RRM}	100 400 600 V
On-State RMS Current (180° Conduction Angles; $T_C = 83^\circ\text{C}$)	$I_{T(RMS)}$	8.0	A
Peak Non-Repetitive Surge Current (1/2 Cycle, Sine Wave 60 Hz, $T_J = 110^\circ\text{C}$)	I_{TSM}	100	A
Circuit Fusing Consideration ($t = 8.3$ ms)	I^2t	40	A ² s
Forward Peak Gate Voltage (Pulse Width ≤ 10 μsec , $T_C = 83^\circ\text{C}$)	V_{GM}	± 5.0	V
Forward Peak Gate Current (Pulse Width ≤ 10 μsec , $T_C = 83^\circ\text{C}$)	I_{GM}	1.0	A
Forward Peak Gate Power (Pulse Width ≤ 10 μsec , $T_C = 83^\circ\text{C}$)	P_{GM}	5.0	W
Average Gate Power ($t = 8.3$ ms, $T_C = 83^\circ\text{C}$)	$P_{G(AV)}$	0.75	W
Operating Junction Temperature Range	T_J	-40 to +110	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-40 to +150	$^\circ\text{C}$
Mounting Torque	-	8.0	in. lb.

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. V_{DRM} and V_{RRM} for all types can be applied on a continuous basis. Ratings apply for zero or negative gate voltage; however, positive gate voltage shall not be applied concurrent with negative potential on the anode. Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded.

Thermal Characteristics

Characteristic	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	2.2	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	60	
Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 10 seconds	T_L	260	$^\circ\text{C}$

Electrical Characteristics - OFF ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit	
Peak Repetitive Blocking Current ($V_{AK} = V_{DRM} = V_{RRM}$; $R_{GK} = 1\text{k}\Omega$)	I_{DRM} I_{RRM}	$T_J = 25^\circ\text{C}$	-	-	10	μA
		$T_J = 110^\circ\text{C}$	-	-	500	
High Logic Level Supply Current from V_{CC}	I_{CCH}	4	4	-		

Electrical Characteristics - ON ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Peak Forward On-State Voltage ($I_{TM} = 16$ A Peak, Pulse Width ≤ 1 ms, Duty Cycle $\leq 2\%$)	V_{TM}	-	1.7	2.0	V
Gate Trigger Current (Continuous dc) (Note 3) ($V_D = 12$ V; $R_L = 100$ Ω)	I_{GT}	-	30	200	μA
Gate Trigger Voltage (Continuous dc) (Note 3) ($V_D = 12$ V; $R_L = 100$ Ω)	V_{GT}	-	0.5	1.5	V
Gate Trigger Non-Trigger Voltage ($V_D = 12$ Vdc, $R_L = 100$ Ω , $T_J = 110^\circ\text{C}$)	V_{GD}	0.1	-	-	V
Holding Current ($V_D = 12$ V, Initiating Current = 200 mA, $R_{GK} = 1\text{k}\Omega$)	I_H	-	-	6.0	mA
Gate Controlled Turn-On Time (Note 5) ($V_D = \text{Rated } V_{DRM}$, $I_{TM} = 16$ A, $I_G = 2$ mA)	t_{gt}	-	1.0	-	μs

Thyristors

8Amps Sen SCR

Dynamic Characteristics

Characteristic	Symbol	Min	Typ	Max	Unit
Critical Rate-of-Rise of Off-State Voltage ($V_D = \text{Rated } V_{DRM}$, Exponential Waveform, Gate Open, $T_J = 110^\circ\text{C}$)	dv/dt	-	10	-	V/ μs

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

- Ratings apply for negative gate voltage or $R_{gk} = 1\text{K}\Omega$. Devices shall not have a positive gate voltage concurrently with a negative voltage on the anode. Devices should not be tested with a constant current source for forward and reverse blocking capability such that the voltage applied exceeds the rated blocking voltage.
- RGK current not included in measurement.

Voltage Current Characteristic of SCR

Symbol	Parameter
V_{DRM}	Peak Repetitive Forward Off State Voltage
I_{DRM}	Peak Forward Blocking Current
V_{RRM}	Peak Repetitive Reverse Off State Voltage
I_{RRM}	Peak Reverse Blocking Current
V_{TM}	Maximum On State Voltage
I_H	Holding Current

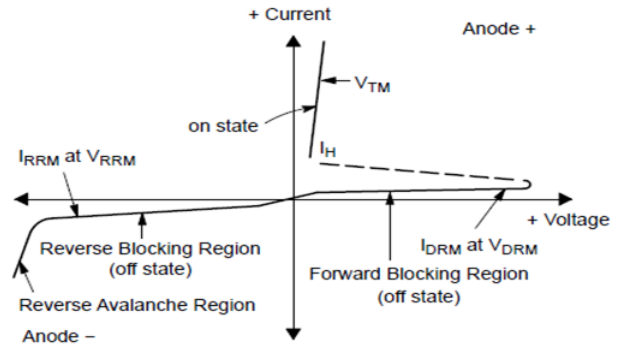


Figure 1. Average Current Derating

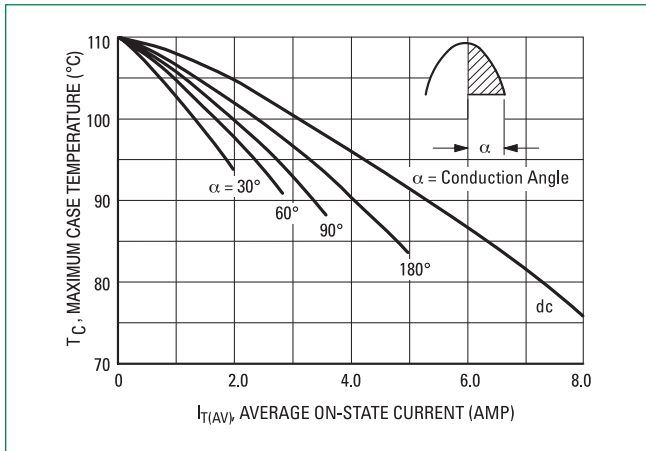


Figure 2. On-State Power Dissipation

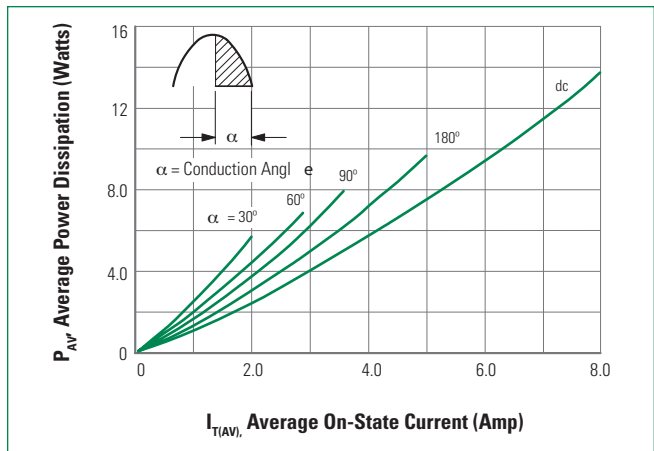


Figure 3. Normalized Gate Current


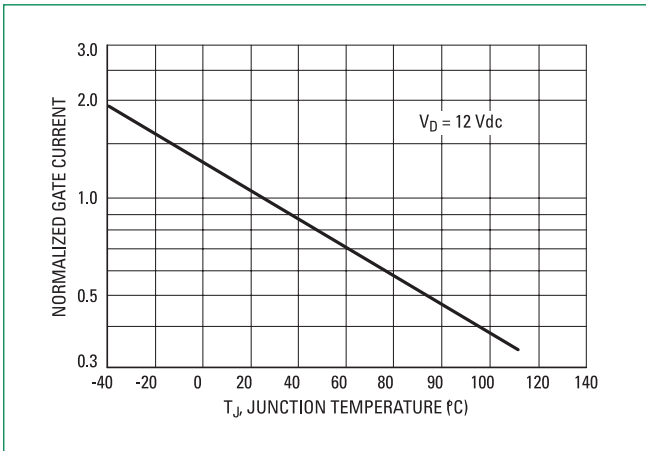




Figure 4. Gate Voltage

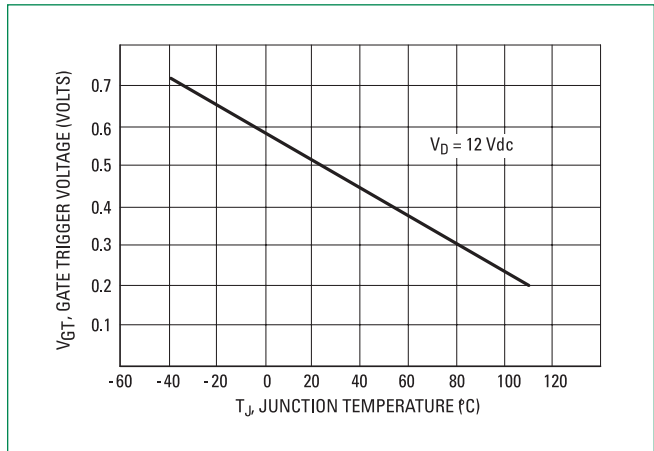


Thyristors

8Amps Sen SCR

Dimensions

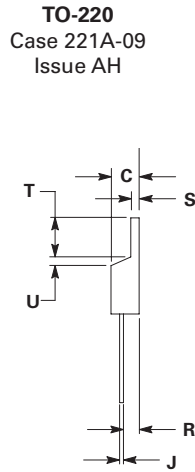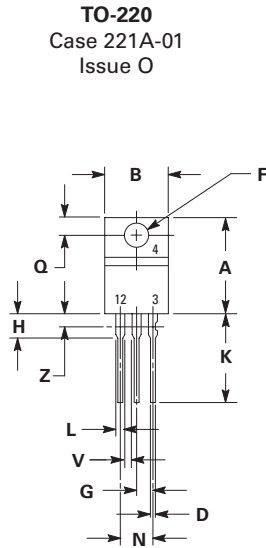

Part Marking System

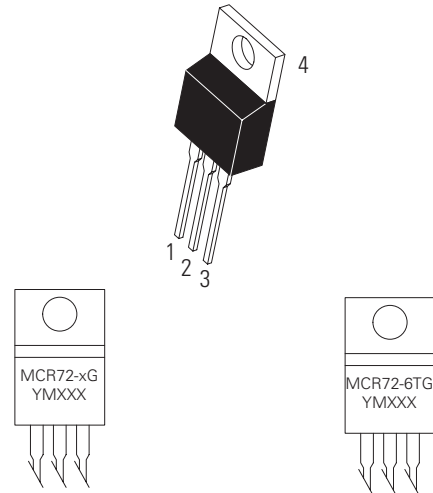

MCR72-x = Device Code
Y = Year
M = Month
XXX = Lot Trace Code
G = Pb-Free Package

MCR72-6T = Device Code
Y = Year
M = Month
XXX = Lot Trace Code
G = Pb-Free Package

Dim	Inches		Millimeters	
	Min	Max	Min	Max
A	0.590	0.620	14.99	15.75
B	0.380	0.420	9.65	10.67
C	0.178	0.188	4.52	4.78
D	0.025	0.035	0.64	0.89
F	0.142	0.147	3.61	3.73
G	0.095	0.105	2.41	2.67
H	0.110	0.130	2.79	3.30
J	0.018	0.024	0.46	0.61
K	0.540	0.575	13.72	14.61
L	0.060	0.075	1.52	1.91
N	0.195	0.205	4.95	5.21
Q	0.105	0.115	2.67	2.92
R	0.085	0.095	2.16	2.41
S	0.045	0.060	1.14	1.52
T	0.235	0.255	5.97	6.47
U	0.000	0.050	0.00	1.27
V	0.045	—	1.15	—
Z	—	0.080	—	2.04

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

Pin Assignment	
1	Cathode
2	Anode
3	Gate
4	Anode

Ordering Information

Device	Package	Shipping
MCR72-3G	TO-220AB (Pb-Free)	1000 Units / Box
MCR72-6G		
MCR72-6TG		
MCR72-8G		
MCR72-8TG		

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we strictly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.