


P0901UALTP Datasheet

www.digi-electronics.com

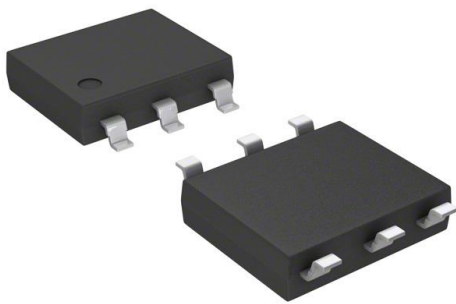

<https://www.DiGi-Electronics.com>

| | |
|------------------------------|---|
| DiGi Electronics Part Number | P0901UALTP-DG |
| Manufacturer | Littelfuse Inc. |
| Manufacturer Product Number | P0901UALTP |
| Description | TVS DEVICE MIXED 98V MS-013 |
| Detailed Description | Transient Voltage Suppressors (TVS), Circuit Protection |

This model P0901UALTP is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

P0901UALTP

Series:

TwinSLIC™

Voltage - Clamping:

98V

Number of Circuits:

4

Mounting Type:

Surface Mount

Supplier Device Package:

MS-013

Manufacturer:

Littelfuse Inc.

Product Status:

Active

Technology:

Mixed Technology

Applications:

SLIC

Package / Case:

6-SMD, Gull Wing

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8541.30.0080


Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99


Fixed Voltage Multiport Series - MS-013

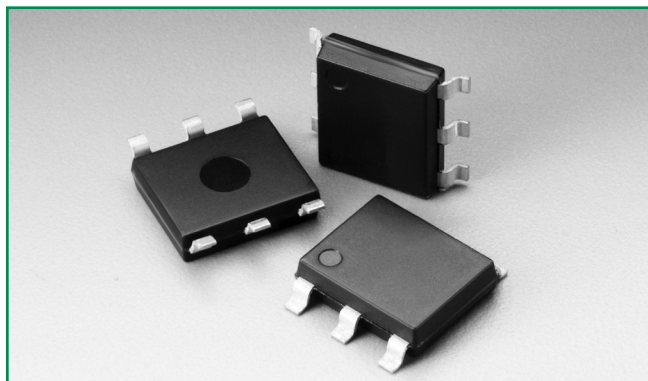


Agency Approvals

| Agency | Agency File Number |
|--------|--------------------|
| | E133083 |

Pinout Designation



Schematic Symbol



Description

Fixed Voltage Multiport Series MS-013 are SIDACTor® components designed to protect sensitive SLIC (Subscriber Line Interface Circuit) devices from damaging overvoltage transients.

The series provides a high surge current rated dual port protection solution incorporating a fixed voltage switching threshold for negatives surges. All positive surges are routed through an internal diode to a ground reference.

Features and Benefits

- Low voltage overshoot positive voltage surges
- Low on-state voltage
- Does not degrade surge capability after multiple surge events within limit.
- Fails short circuit when surged in excess of ratings
- Two-port protection
- Integrated diodes for
- RoHS compliant and Halogen-free
- Replaces four discrete components
- Pb-free E3 means 2nd level interconnect is Pb-free and the terminal finish material is tin(Sn) (IPC/JEDEC J-STD-609A.01)

Applicable Global Standards

- TIA-968-A
- TIA-968-B
- ITU K.20/21 Enhanced Level*
- ITU K.20/21 Basic Level
- GR 1089 Intra-building
- IEC 61000-4-5
- YD/T 1082
- YD/T 993
- YD/T 950
- GR 1089 Inter-building*

*A-rated parts require series resistance

Electrical Characteristics

| Part Number | Marking | V_{DRM} | V_S | I_H | I_S | I_T | V_T | V_F | Capacitance |
|-------------|---------|--------------------|----------------|--------|--------|-------|------------------|-------|------------------------------|
| | | @ $I_{DRM}=5\mu A$ | @ $100V/\mu s$ | mA min | mA max | A max | @ $I_T=2.2$ Amps | V max | |
| P0641UALxx | P0641UA | 58 | 77 | 120 | 800 | 2.2 | 4 | 5 | See Capacitance Values Table |
| P0721UALxx | P0721UA | 65 | 88 | 120 | 800 | 2.2 | 4 | 5 | |
| P0901UALxx | P0901UA | 75 | 98 | 120 | 800 | 2.2 | 4 | 5 | |
| P1101UALxx | P1101UA | 95 | 130 | 120 | 800 | 2.2 | 4 | 5 | |
| P1301UALxx | P1301UA | 120 | 160 | 120 | 800 | 2.2 | 4 | 5 | |
| P1701UALxx | P1701UA | 160 | 200 | 120 | 800 | 2.2 | 4 | 5 | |
| P0641UCLxx | P0641UC | 58 | 77 | 120 | 800 | 2.2 | 4 | 5 | |
| P0721UCLxx | P0721UC | 65 | 88 | 120 | 800 | 2.2 | 4 | 5 | |
| P0901UCLxx | P0901UC | 75 | 98 | 120 | 800 | 2.2 | 4 | 5 | |
| P1101UCLxx | P1101UC | 95 | 130 | 120 | 800 | 2.2 | 4 | 5 | |
| P1301UCLxx | P1301UC | 120 | 160 | 120 | 800 | 2.2 | 4 | 5 | |
| P1701UCLxx | P1701UC | 160 | 200 | 120 | 800 | 2.2 | 4 | 5 | |

Notes:

- Absolute maximum ratings measured at $T_A = 25^\circ C$ (unless otherwise noted).
- Components are not appropriate for positive ringing systems
- All electrical characteristics shown are defined from Tip (pins 1 & 6) to Ground (pins 2 & 5), and Ring (pins 3 & 4) to Ground (pins 2 & 5)
- **XX** = Part Number Suffix: **'TP'** (Tube Pack) or **'RP'** (Reel Pack).

Capacitance Values

| Part Number | pF Pin 1-2 / 3-2 (4-5/6-5) Tip-Ground, Ring-Ground | | pF Pin 1-3 (4-6) Tip-Ring | |
|-------------|--|-----|---------------------------------|-----|
| | MIN | MAX | MIN | MAX |
| | P0641UALxx | 50 | 205 | 30 |
| P0721UALxx | 45 | 195 | 20 | 125 |
| P0901UALxx | 40 | 180 | 20 | 115 |
| P1101UALxx | 40 | 160 | 15 | 105 |
| P1301UALxx | 35 | 160 | 15 | 100 |
| P1701UALxx | 30 | 125 | 15 | 80 |
| P0641UCLxx | 65 | 205 | 40 | 130 |
| P0721UCLxx | 60 | 195 | 20 | 125 |
| P0901UCLxx | 60 | 180 | 20 | 115 |
| P1101UCLxx | 50 | 160 | 15 | 105 |
| P1301UCLxx | 35 | 160 | 15 | 100 |
| P1701UCLxx | 40 | 125 | 15 | 80 |

Note: Off-state capacitance (C_o) is measured at 1 MHz with a -2V bias.

Surge Ratings

| Series | I_{PP} | | | | | | | | | I_{TSM} 50/60 Hz | di/dt |
|--------|--|--|--|--|--|--|--|--|---|-----------------------|-------|
| | 0.2/310 ¹ 0.5/700 ² | 2/10 ¹ 2/10 ² | 8/20 ¹ 1.2/50 ² | 10/160 ¹ 10/160 ² | 10/560 ¹ 10/560 ² | 5/320 ¹ 9/720 ² | 10/360 ¹ 10/360 ² | 10/1000 ¹ 10/1000 ² | 5/310 ¹ 10/700 ² | | |
| | A min | A min | A min | A min | A min | A min | A min | A min | A min | | |
| A | 20 | 150 | 150 | 90 | 50 | 75 | 75 | 45 | 75 | 20 | 500 |
| C | 50 | 500 | 400 | 200 | 150 | 200 | 175 | 100 | 200 | 30 | 500 |

Notes:

1 Current waveform in μ s


2 Voltage waveform in μ s

- Peak pulse current rating (I_{pp}) is repetitive and guaranteed for the life of the product.

- I_{pp} ratings applicable over temperature range of -40°C to +85°C

- The component must initially be in thermal equilibrium with -40°C $\leq T_j \leq$ +150°C

Thermal Considerations

| Package | Symbol | Parameter | Value | Unit |
|--|-----------------|---|-------------|------|
| Modified MS-013  | T_j | Operating Junction Temperature Range | -40 to +125 | °C |
| | T_s | Storage Temperature Range | -65 to +150 | °C |
| | $R_{\theta JA}$ | Thermal Resistance: Junction to Ambient | 60 | °C/W |

Additional Information



Datasheet




Resources




Samples


V-I Characteristics

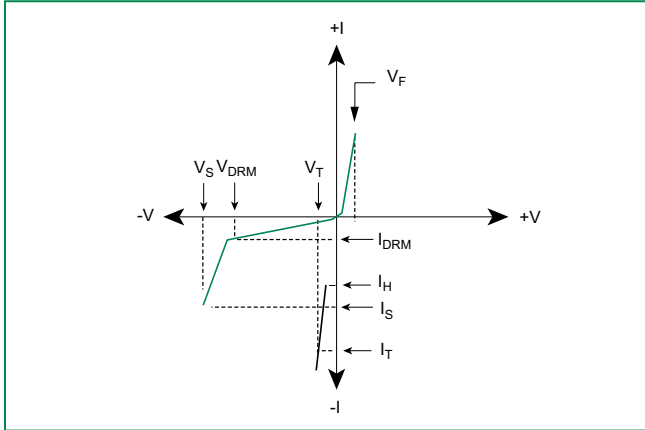


t_r x t_d Pulse Waveform

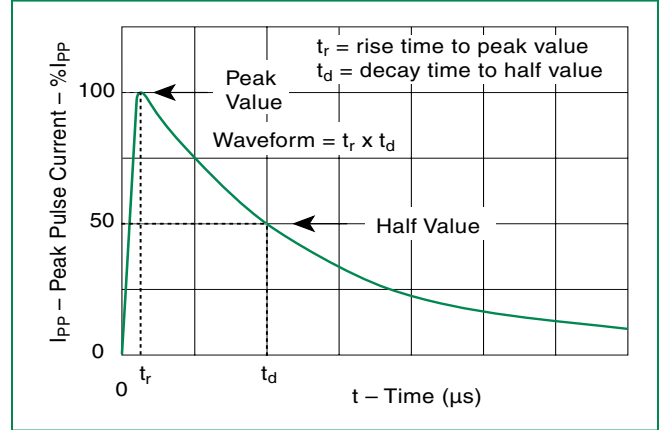

Normalized V_S Change vs. Junction Temperature

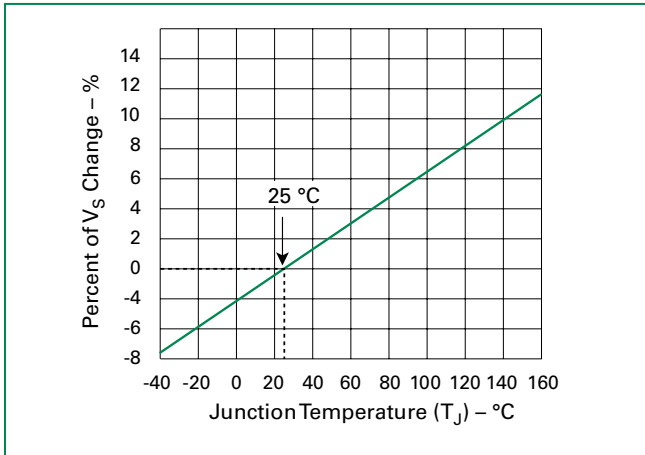


Normalized DC Holding Current vs. Case Temperature

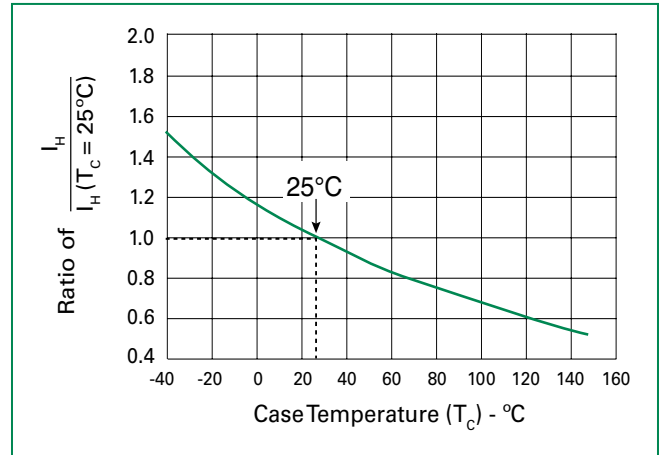

Soldering Parameters

| | | |
|--|-----------------------------------|-------------------------------|
| Reflow Condition | | Pb-Free assembly (see Fig. 1) |
| Pre Heat | -Temperature Min ($T_{s(min)}$) | +150°C |
| | -Temperature Max ($T_{s(max)}$) | +200°C |
| | -Time (Min to Max) (t_s) | 60-180 secs. |
| Average ramp up rate (Liquidus Temp (T_L) to peak) | | 3°C/sec. Max. |
| $T_{s(max)}$ to T_L - Ramp-up Rate | | 3°C/sec. Max. |
| Reflow | -Temperature (T_L) (Liquidus) | +217°C |
| | -Temperature (t_L) | 60-150 secs. |
| Peak Temp (T_p) | | +260(+0/-5)°C |
| Time within 5°C of actual Peak Temp (t_p) | | 30 secs. Max. |
| Ramp-down Rate | | 6°C/sec. Max. |
| Time 25°C to Peak Temp (T_p) | | 8 min. Max. |
| Do not exceed | | +260°C |

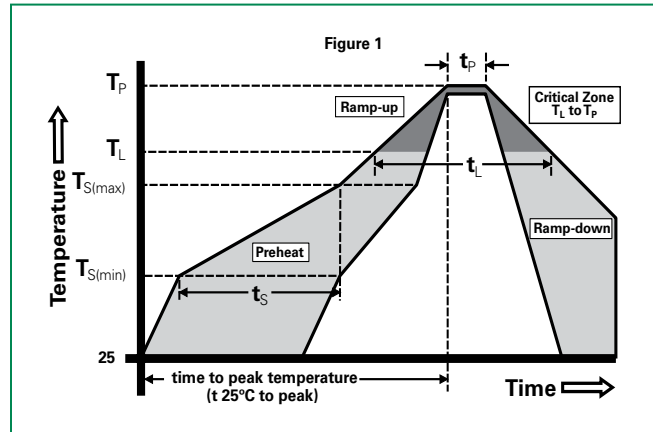


Physical Specifications

| | |
|------------------------|---|
| Lead Material | Copper Alloy |
| Terminal Finish | 100% Matte-Tin Plated |
| Body Material | UL Recognized epoxy meeting flammability classification V-0 |


Environmental Specifications

| | |
|---|---|
| High Temp Voltage Blocking | 80% Rated V_{DRM} (V_{DC}) +125°C or +150°C, 504 or 1008 hrs. MIL-STD-750 (Method 1040) JEDEC, JESD22-A-101 |
| Temp Cycling | -65°C to +150°C, 15 min. dwell, 10 up to 100 cycles. MIL-STD-750 (Method 1051) EIA/JEDEC, JESD22-A104 |
| Biased Temp & Humidity | 52 V_{DC} (+85°C) 85%RH, 504 up to 1008 hrs. EIA/JEDEC, JESD22-A-101 |
| High Temp Storage | +150°C 1008 hrs. MIL-STD-750 (Method 1031) JEDEC, JESD22-A-101 |
| Low Temp Storage | -65°C, 1008 hrs. |
| Thermal Shock | 0°C to +100°C, 5 min. dwell, 10 sec. transfer, 10 cycles. MIL-STD-750 (Method 1056) JEDEC, JESD22-A-106 |
| Autoclave (Pressure Cooker Test) | +121°C, 100%RH, 2atm, 24 up to 168 hrs. EIA/JEDEC, JESD22-A-102 |
| Resistance to Solder Heat | +260°C, 30 secs. MIL-STD-750 (Method 2031) |
| Moisture Sensitivity Level | 85%RH, +85°C, 168 hrs., 3 reflow cycles (+260°C Peak). JEDEC-J-STD-020, Level 1 |


Part Numbering

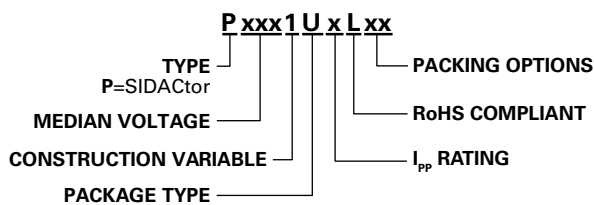

Part Marking

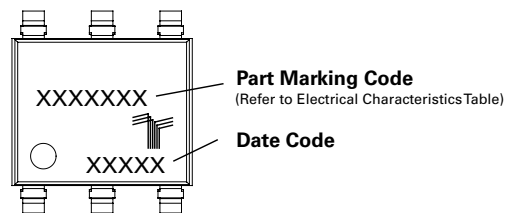

Dimensions – MS-013

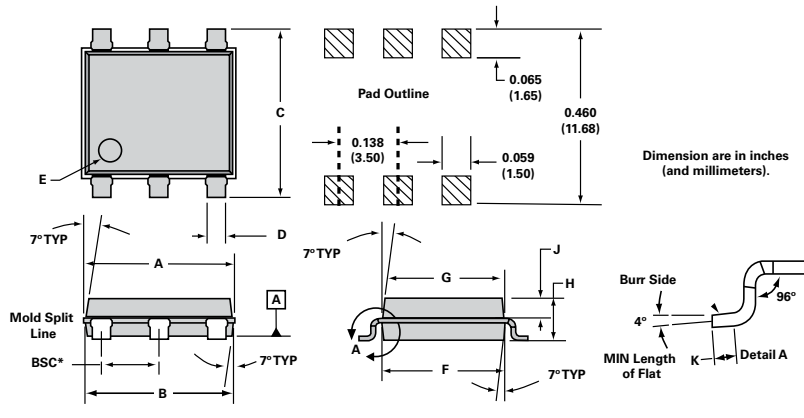


| Dimensions | Inches | | Millimeters | |
|-------------|--------|-------|-------------|-------|
| | Min | Max | Min | Max |
| A | 0.360 | 0.364 | 9.14 | 9.25 |
| B | 0.352 | 0.356 | 8.94 | 9.04 |
| C | 0.400 | 0.412 | 10.16 | 10.46 |
| D | 0.043 | 0.045 | 1.09 | 1.13 |
| E | 0.047 | 0.055 | 1.19 | 1.40 |
| F | 0.293 | 0.297 | 7.44 | 7.54 |
| G | 0.289 | 0.293 | 7.34 | 7.44 |
| H | 0.089 | 0.093 | 2.26 | 2.36 |
| J | 0.041 | 0.049 | 1.04 | 1.24 |
| K | 0.020 | | 0.51 | |
| BSC* | 0.133 | 0.143 | 3.38 | 3.63 |

* BSC = Basic Spacing between Centers


Packing Options

| Package Type | Description | Quantity | Added Suffix | Industry Standard |
|--------------|--|-------------------|--------------|-------------------|
| U | Modified MS-013 6-pin Tape and Reel Pack | 1500 | RP | EIA-481-D |
| | Modified MS-013 6-pin Tube Pack | 500 (50 per tube) | TP | N/A |

Tape and Reel Specification – MS-013

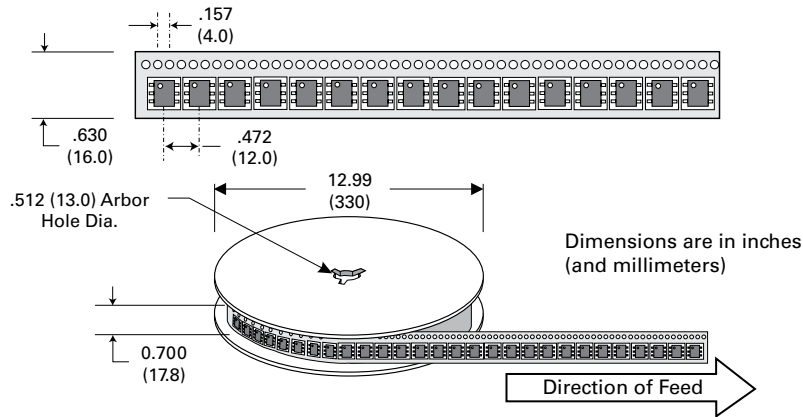

Tube Pack Dimensions – MS-013

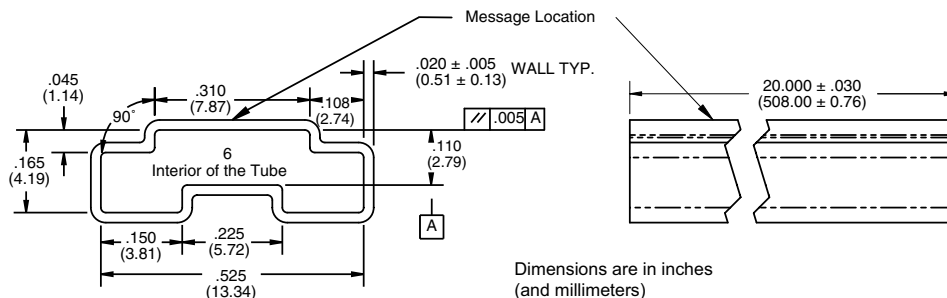

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.