


BCX38CSTZ Datasheet

www.digi-electronics.com

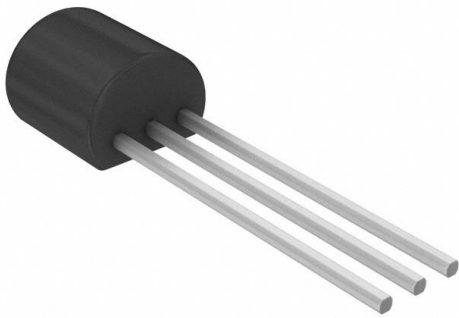

<https://www.DiGi-Electronics.com>

| | |
|------------------------------|--|
| DiGi Electronics Part Number | BCX38CSTZ-DG |
| Manufacturer | Diodes Incorporated |
| Manufacturer Product Number | BCX38CSTZ |
| Description | TRANS NPN DARL 60V 0.8A E-LINE |
| Detailed Description | Bipolar (BJT) Transistor NPN - Darlington 60 V 800 mA 1 W Through Hole E-Line (TO-92 compatible) |



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

BCX38CSTZ

Series:

-

Transistor Type:

NPN - Darlington

Voltage - Collector Emitter Breakdown (Max):

60 V

Current - Collector Cutoff (Max):

100nA (ICBO)

Power - Max:

1 W

Operating Temperature:

-55°C ~ 200°C (TJ)

Package / Case:

E-Line-3

Base Product Number:

BCX38

Manufacturer:

Diodes Incorporated

Product Status:

Active

Current - Collector (Ic) (Max):

800 mA

Vce Saturation (Max) @ Ib, Ic:

1.25V @ 8mA, 800mA

DC Current Gain (hFE) (Min) @ Ic, Vce:

10000 @ 500mA, 5V

Frequency - Transition:

-

Mounting Type:

Through Hole

Supplier Device Package:

E-Line (TO-92 compatible)

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8541.29.0095

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99


NPN SILICON PLANAR MEDIUM POWER DARLINGTON TRANSISTORS

BCX38A/B/C

ISSUE 1 – MARCH 94

FEATURES

- * 60 Volt V_{CE0}
- * Gain of 10K at $I_C=0.5$ Amp
- * $P_{tot}=1$ Watt



ABSOLUTE MAXIMUM RATINGS.


| PARAMETER | SYMBOL | VALUE | UNIT |
|--|----------------|-------------|-------------|
| Collector-Base Voltage | V_{CBO} | 80 | V |
| Collector-Emitter Voltage | V_{CEO} | 60 | V |
| Emitter-Base Voltage | V_{EBO} | 10 | V |
| Peak Pulse Current | I_{CM} | 2 | A |
| Continuous Collector Current | I_C | 800 | mA |
| Power Dissipation at $T_{amb}=25^{\circ}C$ | P_{tot} | 1 | W |
| Operating and Storage Temperature Range | $T_j; T_{stg}$ | -55 to +200 | $^{\circ}C$ |

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}C$).


| PARAMETER | SYMBOL | MIN. | TYP. | MAX. | UNIT | CONDITIONS. |
|---------------------------------------|----------------|----------|---------------|------|------|--|
| Collector-Base Breakdown Voltage | $V_{(BR)CBO}$ | 80 | | | V | $I_C=10\mu A, I_E=0$ |
| Collector-Emitter Sustaining Voltage | $V_{CEO(sus)}$ | 60 | | | V | $I_C=10mA, I_B=0$ |
| Emitter-Base Breakdown Voltage | $V_{(BR)EBO}$ | 10 | | | V | $I_E=10\mu A, I_C=0$ |
| Collector Cut-Off Current | I_{CBO} | | | 100 | nA | $V_{CB}=60V, I_E=0$ |
| Emitter Cut-Off Current | I_{EBO} | | | 100 | nA | $V_{EB}=8V, I_C=0$ |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | | | 1.25 | V | $I_C=800mA, I_B=8mA^*$ |
| Base-Emitter Turn-on Voltage | $V_{BE(on)}$ | | | 1.8 | V | $I_C=800mA, V_{CE}=5V^*$ |
| Static Forward Current Transfer Ratio | BCX38A | h_{FE} | 500 1000 | | | $I_C=100mA, V_{CE}=5V^*$ $I_C=500mA, V_{CE}=5V^*$ |
| | BCX38B | | 2000 4000 | | | $I_C=100mA, V_{CE}=5V^*$ $I_C=500mA, V_{CE}=5V^*$ |
| | BCX38C | | 5000 10000 | | | $I_C=100mA, V_{CE}=5V^*$ $I_C=500mA, V_{CE}=5V^*$ |

BCX38A/B/C


TYPICAL CHARACTERISTICS

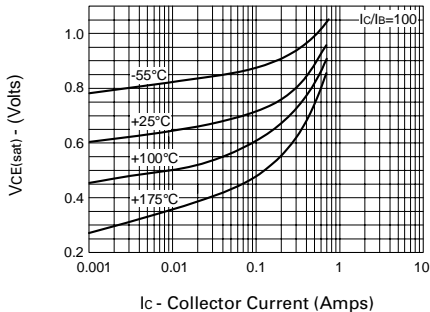


$V_{CE(sat)}$ v I_C

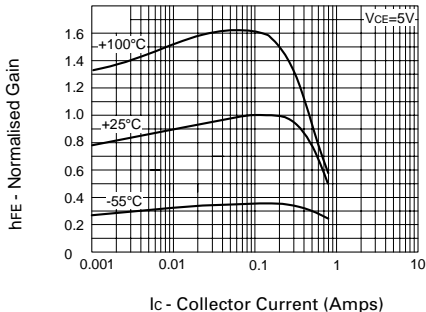


hFE v I_C

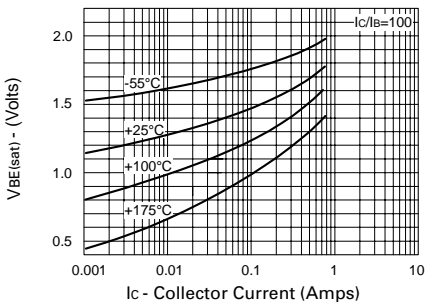


$V_{BE(sat)}$ v I_C

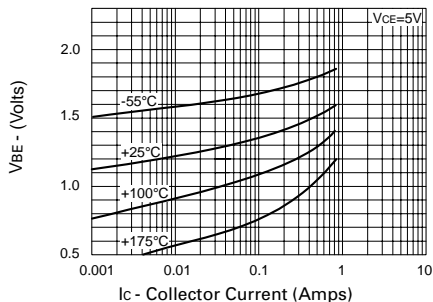

$V_{BE(on)}$ v I_C

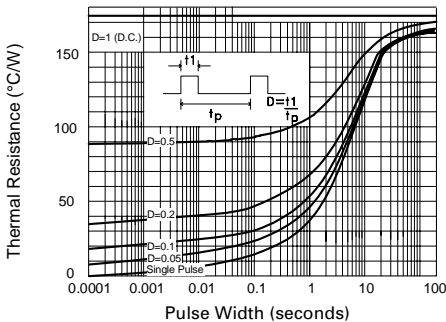


Maximum transient thermal impedance

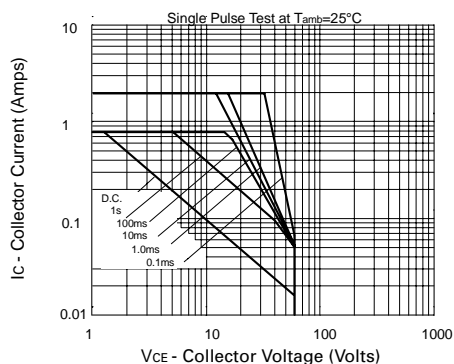

Safe Operating Area

BCX38A/B/C

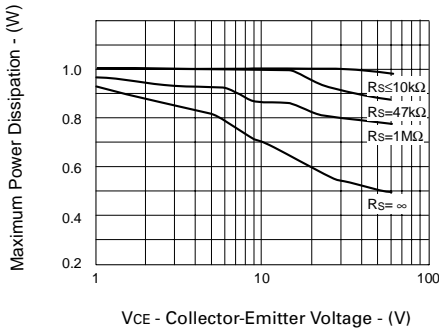

The maximum permissible operational temperature can be obtained using the equation:

$$T_{amb(max)} = \frac{Power(max) - Power(actual)}{0.0057} + 25^{\circ}C$$

$T_{amb(max)}$ = Maximum operating ambient temperature

Power (max) = Maximum power dissipation figure, for a given V_{CE} and source resistance (R_S)

Power (actual) = Actual power dissipation in users circuit

