


# DDTA114TKA-7-F Datasheet



<https://www.DiGi-Electronics.com>

|                              |   |
|------------------------------|---|
| DiGi Electronics Part Number | DDTA114TKA-7-F-DG   |
| Manufacturer                 | <a href="#">Diodes Incorporated</a>   |
| Manufacturer Product Number  | DDTA114TKA-7-F  |
| Description                  | TRANS PREBIAS PNP 50V SC59-3  |
| Detailed Description         | Pre-Biased Bipolar Transistor (BJT) PNP - Pre-Biased 50 V 100 mA 250 MHz 200 mW Surface Mount SC-59-3 |

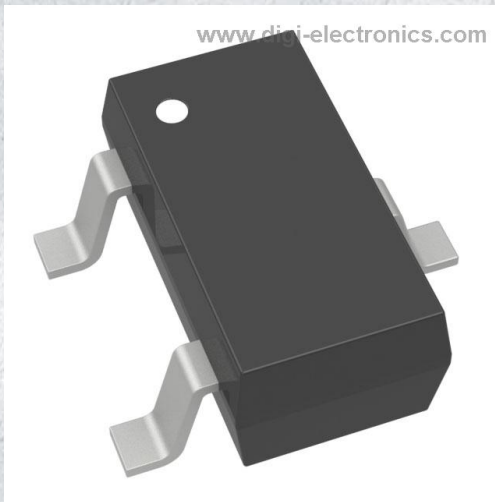

Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

DDTA114TKA-7-F

Series:

-

Transistor Type:

PNP - Pre-Biased

Voltage - Collector Emitter Breakdown (Max):

50 V

DC Current Gain (hFE) (Min) @ Ic, Vce:

100 @ 1mA, 5V

Current - Collector Cutoff (Max):

500nA (ICBO)

Power - Max:

200 mW

Package / Case:

TO-236-3, SC-59, SOT-23-3

Base Product Number:

DDTA114

Manufacturer:

Diodes Incorporated

Product Status:

Obsolete

Current - Collector (Ic) (Max):

100 mA

Resistor - Base (R1):

10 kOhms

Vce Saturation (Max) @ Ib, Ic:

300mV @ 100µA, 1mA

Frequency - Transition:

250 MHz

Mounting Type:

Surface Mount

Supplier Device Package:

SC-59-3

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8541.21.0075

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

# DDTA (R1-ONLY SERIES) KA


## PNP PRE-BIASED SMALL SIGNAL SURFACE MOUNT TRANSISTOR

### Features

- Epitaxial Planar Die Construction
- Complementary NPN Types Available (DDTC)
- Built-In Biasing Resistor, R1 only
- **Lead Free/RoHS Compliant (Note 2)**
- **"Green" Device (Note 3 and 4)**


### Mechanical Data

- Case: SC-59
- Case Material: Molded Plastic, "Green" Molding Compound, Note 4. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Copper leadframe).
- Terminal Connections: See Diagram
- Marking Information: See Table Below & Page 4
- Ordering Information: See Page 4
- Weight: 0.008 grams (approximate)

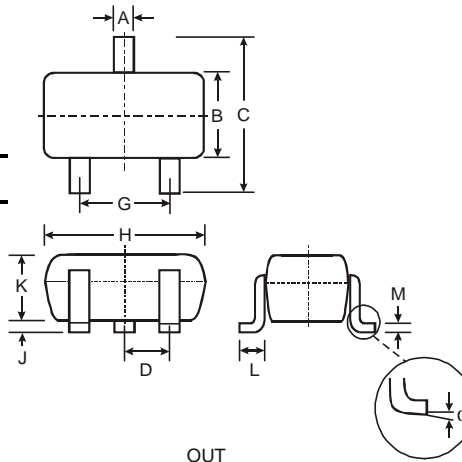

| SC-59                |       |      |
|----------------------|-------|------|
| Dim                  | Min   | Max  |
| A                    | 0.35  | 0.50 |
| B                    | 1.50  | 1.70 |
| C                    | 2.70  | 3.00 |
| D                    | 0.95  |      |
| G                    | 1.90  |      |
| H                    | 2.90  | 3.10 |
| J                    | 0.013 | 0.10 |
| K                    | 1.00  | 1.30 |
| L                    | 0.35  | 0.55 |
| M                    | 0.10  | 0.20 |
| $\alpha$             | 0°    | 8°   |
| All Dimensions in mm |       |      |

| P/N        | R1 (NOM)      | Type Code |
|------------|---------------|-----------|
| DDTA113TKA | 1K $\Omega$   | P01       |
| DDTA123TKA | 2.2K $\Omega$ | P03       |
| DDTA143TKA | 4.7K $\Omega$ | P07       |
| DDTA114TKA | 10K $\Omega$  | P12       |
| DDTA124TKA | 22K $\Omega$  | P16       |
| DDTA144TKA | 47K $\Omega$  | P19       |
| DDTA115TKA | 100K $\Omega$ | P23       |
| DDTA125TKA | 200K $\Omega$ | P25       |



### Maximum Ratings @T<sub>A</sub> = 25°C unless otherwise specified

| Characteristic                                       | Symbol                            | Value       | Unit |
|--|-----------------------------------|-------------|------|
| Collector-Base Voltage                               | V <sub>CB0</sub>                  | -50         | V    |
| Collector-Emitter Voltage                            | V <sub>CEO</sub>                  | -50         | V    |
| Emitter-Base Voltage                                 | V <sub>EB0</sub>                  | -5          | V    |
| Collector Current                                    | I <sub>C</sub> (Max)              | -100        | mA   |
| Power Dissipation                                    | P <sub>d</sub>                    | 200         | mW   |
| Thermal Resistance, Junction to Ambient Air (Note 1) | R <sub>θJA</sub>                  | 625         | °C/W |
| Operating and Storage Temperature Range              | T <sub>j</sub> , T <sub>STG</sub> | -55 to +150 | °C   |

- Notes:
1. Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.
  2. No purposefully added lead.
  3. Diodes Inc.'s "Green" policy can be found on our website at [http://www.diodes.com/products/lead\\_free/index.php](http://www.diodes.com/products/lead_free/index.php).
  4. Product manufactured with Date Code 0627 (week 27, 2006) and newer are built with Green Molding Compound. Product manufactured prior to Date Code 0627 are built with Non-Green Molding Compound and may contain Halogens or Sb2O3 Fire Retardants.



## Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic                       | Symbol        | Min | Typ | Max  | Unit          | Test Condition  |
|--------------------------------------|---------------|-----|-----|------|---------------|---|
| Collector-Base Breakdown Voltage     | $BV_{CBO}$    | -50 | —   | —    | V             | $I_C = -50\mu\text{A}$  |
| Collector-Emitter Breakdown Voltage  | $BV_{CEO}$    | -50 | —   | —    | V             | $I_C = -1\text{mA}$   |
| Emitter-Base Breakdown Voltage       | $BV_{EBO}$    | -5  | —   | —    | V             | $I_E = -50\mu\text{A}$  |
| Collector Cutoff Current             | $I_{CBO}$     | —   | —   | -0.5 | $\mu\text{A}$ | $V_{CB} = -50\text{V}$  |
| Emitter Cutoff Current               | $I_{EBO}$     | —   | —   | -0.5 | $\mu\text{A}$ | $V_{EB} = -4\text{V}$   |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | —   | —   | -0.3 | V             | $I_C/I_B = -10\text{mA}/-1\text{mA}$ DDTA113TKA<br>$I_C/I_B = -5\text{mA}/-0.5\text{mA}$ DDTA123TKA<br>$I_C/I_B = -2.5\text{mA}/-.25\text{mA}$ DDTA143TKA<br>$I_C/I_B = -1\text{mA}/-.1\text{mA}$ DDTA114TKA<br>$I_C/I_B = -5\text{mA}/-0.5\text{mA}$ DDTA124TKA<br>$I_C/I_B = -2.5\text{mA}/-.25\text{mA}$ DDTA144TKA<br>$I_C/I_B = -1\text{mA}/-0.1\text{mA}$ DDTA115TKA<br>$I_C/I_B = -.5\text{mA}/-.05\text{mA}$ DDTA125TKA |
| DC Current Transfer Ratio            | $h_{FE}$      | 100 | 250 | 600  | —             | $I_C = -1\text{mA}$ , $V_{CE} = -5\text{V}$   |
| Input Resistor ( $R_1$ ) Tolerance   | $\Delta R_1$  | -30 | —   | +30  | %             | —   |
| Gain-Bandwidth Product*              | $f_T$         | —   | 250 | —    | MHz           | $V_{CE} = -10\text{V}$ , $I_E = 5\text{mA}$ , $f = 100\text{MHz}$   |

\* Transistor - For Reference Only

## Typical Curves – DDTA114TKA

NEW PRODUCT

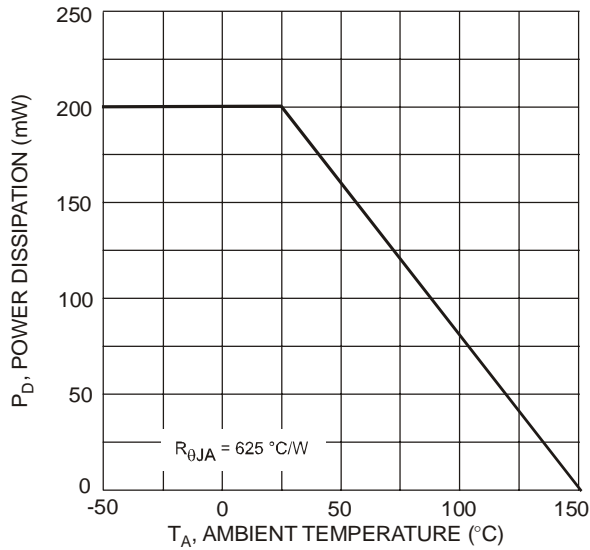


Fig. 1 Derating Curve

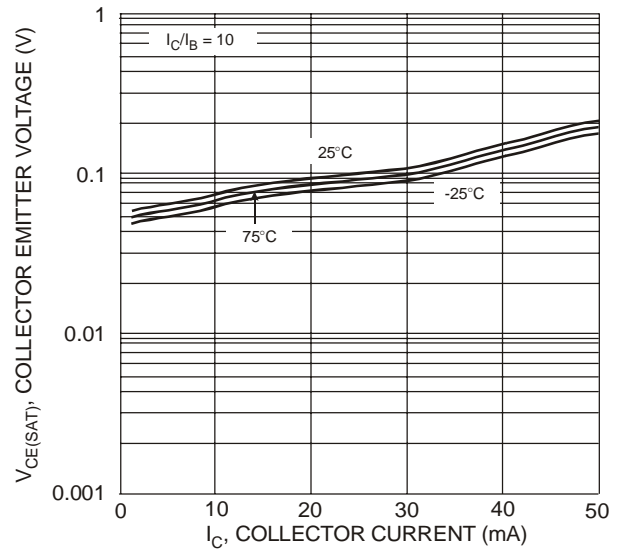
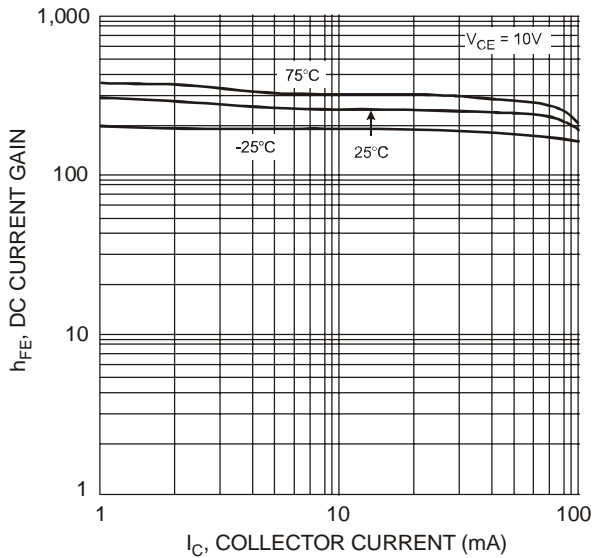
Fig. 2  $V_{CE(SAT)}$  vs.  $I_C$ 

Fig. 3 DC Current Gain

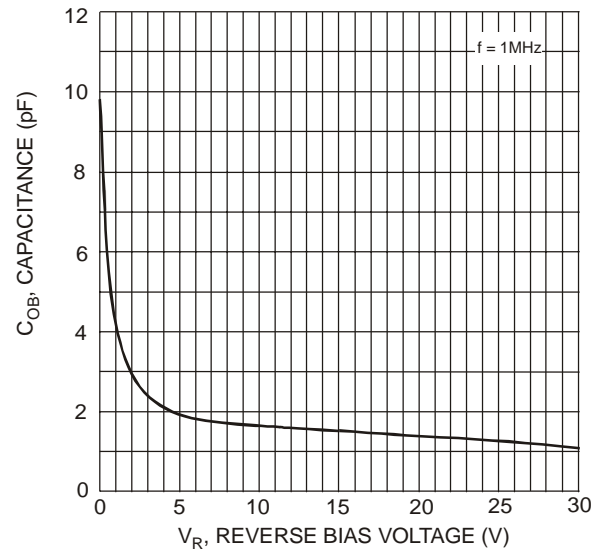


Fig. 4 Output Capacitance

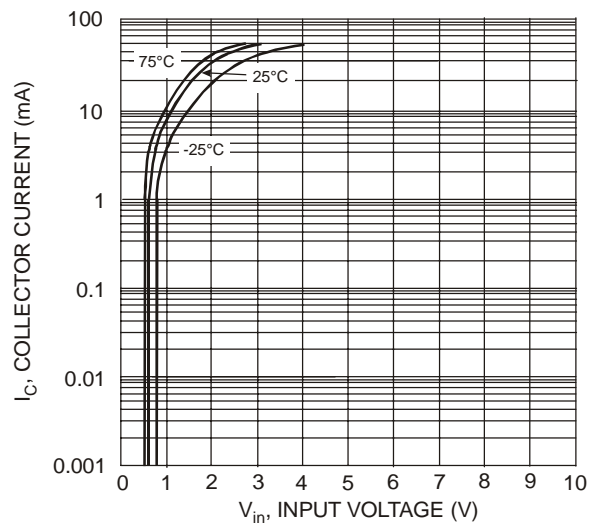


Fig. 5 Collector Current vs. Input Voltage

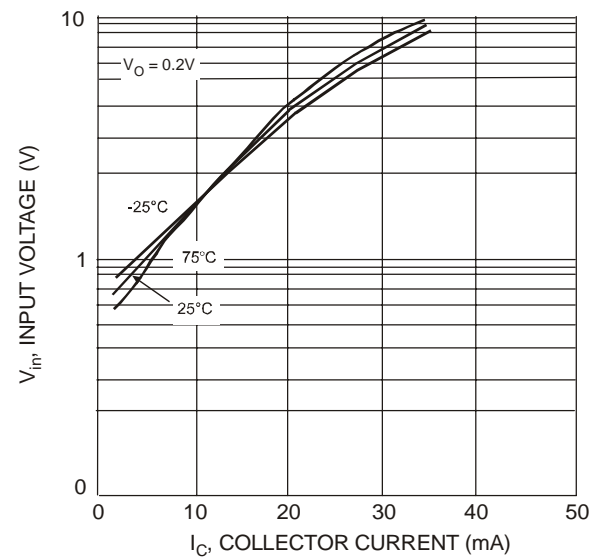


Fig. 6 Input Voltage vs. Collector Current




## Ordering Information (Note 4 & 5)

| Device         | Packaging | Shipping         |
|----------------|-----------|------------------|
| DDTA113TKA-7-F | SC-59     | 3000/Tape & Reel |
| DDTA123TKA-7-F | SC-59     | 3000/Tape & Reel |
| DDTA143TKA-7-F | SC-59     | 3000/Tape & Reel |
| DDTA114TKA-7-F | SC-59     | 3000/Tape & Reel |
| DDTA124TKA-7-F | SC-59     | 3000/Tape & Reel |
| DDTA144TKA-7-F | SC-59     | 3000/Tape & Reel |
| DDTA115TKA-7-F | SC-59     | 3000/Tape & Reel |
| DDTA125TKA-7-F | SC-59     | 3000/Tape & Reel |

Notes: 5. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

## Marking Information



XXX = Product Type Marking Code, See Table on Page 1  
 YM = Date Code Marking  
 Y = Year ex: T = 2006  
 M = Month ex: 9 = September

### Date Code Key

| Year | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 |
|------|------|------|------|------|------|------|------|
| Code | T    | U    | V    | W    | X    | Y    | Z    |

| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code  | 1   | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | O   | N   | D   |

### IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

### LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.