

# FMMT449TA Datasheet



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	FMMT449TA-DG
Manufacturer	<a href="#">Diodes Incorporated</a>
Manufacturer Product Number	FMMT449TA
Description	TRANS NPN 30V 1A SOT23-3
Detailed Description	Bipolar (BJT) Transistor NPN 30 V 1 A 150MHz 500 mW Surface Mount SOT-23-3



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.



## Purchase and inquiry

Manufacturer Product Number:

FMMT449TA

Series:

-

Transistor Type:

NPN

Voltage - Collector Emitter Breakdown (Max):

30 V

Current - Collector Cutoff (Max):

100nA (ICBO)

Power - Max:

500 mW

Operating Temperature:

-55°C ~ 150°C (TJ)

Package / Case:

TO-236-3, SC-59, SOT-23-3

Base Product Number:

FMMT449

Manufacturer:

Diodes Incorporated

Product Status:

Active

Current - Collector (Ic) (Max):

1 A

Vce Saturation (Max) @ Ib, Ic:

1V @ 200mA, 2A

DC Current Gain (hFE) (Min) @ Ic, Vce:

100 @ 500mA, 2V

Frequency - Transition:

150MHz

Mounting Type:

Surface Mount

Supplier Device Package:

SOT-23-3

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8541.21.0075

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

# SOT23 NPN SILICON PLANAR MEDIUM POWER TRANSISTOR

## FMMT449


ISSUE 3 - NOVEMBER 1995

### FEATURES

\* Low equivalent on-resistance;  $R_{CE(sat)} 250m\Omega$  at 1A

COMPLEMENTARY TYPE – FMMT549

PARTMARKING DETAIL – 449



### ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	$V_{CBO}$	50	V
Collector-Emitter Voltage	$V_{CEO}$	30	V
Emitter-Base Voltage	$V_{EBO}$	5	V
Peak Pulse Current	$I_{CM}$	2	A
Continuous Collector Current	$I_C$	1	A
Base Current	$I_B$	200	mA
Power Dissipation at $T_{amb} = 25^\circ C$	$P_{tot}$	500	mW
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^\circ C$


### ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ C$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	50		V	$I_C = 1mA, I_E = 0$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	30		V	$I_C = 10mA, I_B = 0^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	5		V	$I_E = 100\mu A, I_C = 0$
Collector Cut-Off Current	$I_{CBO}$		0.1 10	$\mu A$ $\mu A$	$V_{CB} = 40V, I_E = 0$ $V_{CB} = 40V, T_{amb} = 100^\circ C$
Emitter Cut-Off Current	$I_{EBO}$		0.1	$\mu A$	$V_{EB} = 4V, I_C = 0$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		0.5 1.0	V V	$I_C = 1A, I_B = 100mA^*$ $I_C = 2A, I_B = 200mA^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		1.25	V	$I_C = 1A, I_B = 100mA^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$		1.0	V	$I_C = 1A, V_{CE} = 2V^*$
Static Forward Current Transfer Ratio	$h_{FE}$	70 100 80 40	300		$I_C = 50mA, V_{CE} = 2V^*$ $I_C = 500mA, V_{CE} = 2V^*$ $I_C = 1A, V_{CE} = 2V^*$ $I_C = 2A, V_{CE} = 2V^*$
Transition Frequency	$f_T$	150		MHz	$I_C = 50mA, V_{CE} = 10V$ $f = 100MHz$
Output Capacitance	$C_{obo}$		15	pF	$V_{CB} = 10V, f = 1MHz$


\*Measured under pulsed conditions. Pulse width=300 $\mu s$ . Duty cycle  $\leq 2\%$

Spice parameter data is available upon request for this device


## TYPICAL CHARACTERISTICS

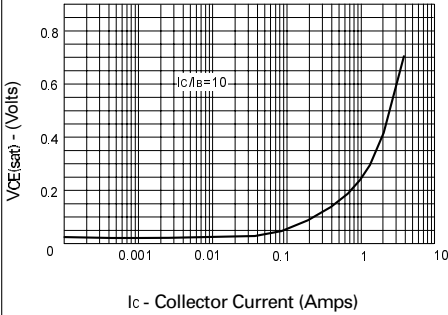


**$V_{CE(sat)}$  v  $I_C$**

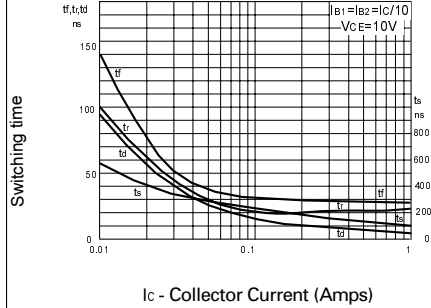


**Switching Speeds**

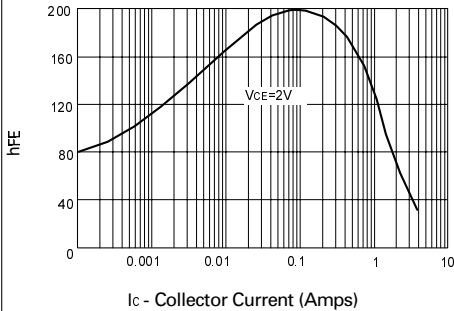


**$h_{FE}$  v  $I_C$**

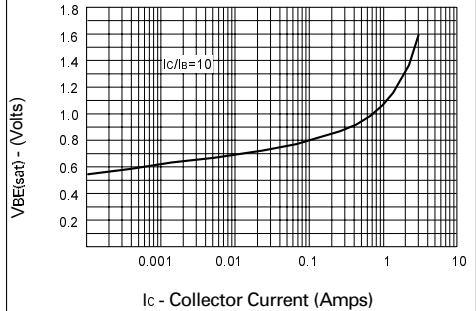

**$V_{BE(sat)}$  v  $I_C$**

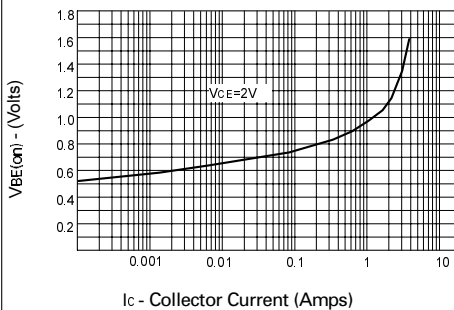

**$V_{BE(on)}$  v  $I_C$**

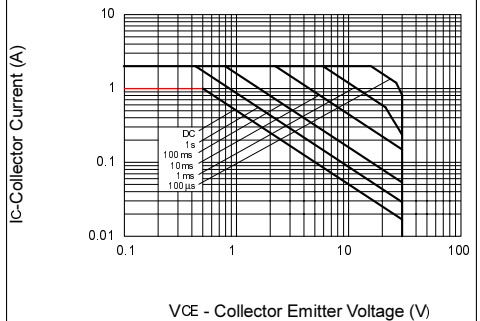

**Safe Operating Area**



## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.