


PI2DPX1263XUAEX Datasheet

www.digi-electronics.com

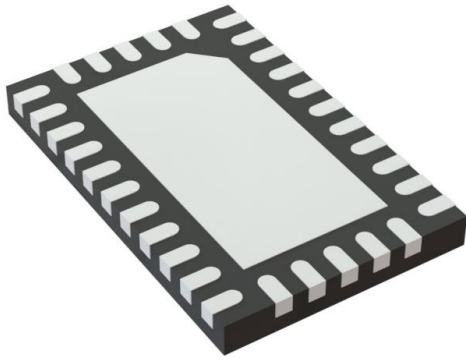

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	PI2DPX1263XUAEX-DG
Manufacturer	Diodes Incorporated
Manufacturer Product Number	PI2DPX1263XUAEX
Description	ACTIVE DISPLAY X2-QFN2845-32 T&R
Detailed Description	Buffer, ReDriver 4 Channel 10Gbps 32-X2QFN (2.85 x4.5)

This model PI2DPX1263XUAEX is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

PI2DPX1263XUAEX

Series:

ReDriver™

Type:

Buffer, ReDriver

Input:

-

Data Rate (Max):

10Gbps

Delay Time:

-

Voltage - Supply:

1.71V ~ 1.89V

Operating Temperature:

-40°C ~ 85°C

Package / Case:

32-XFQFN Exposed Pad

Manufacturer:

Diodes Incorporated

Product Status:

Active

Applications:

DisplayPort

Output:

Differential

Number of Channels:

4

Signal Conditioning:

Input Equalization, Output De-Emphasis

Current - Supply:

-

Mounting Type:

Surface Mount

Supplier Device Package:

32-X2QFN (2.85x4.5)

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

ECCN:

EAR99

REACH Status:

REACH Unaffected

HTSUS:

8542.39.0001

PI2DPX1263

1.8V 10Gbps DisplayPort 2.0/1.4 Linear ReDriver with AUX Listener

Features


- 4-Channel Configuration with 10Gbps Linear ReDriver
- Supports the Channel Speed up to 10Gbps DP2.0 (UHBR10)
- Ultra-Low Latency (< 300ps) for Better Interoperability and Data Throughput
- Individual Controls on CTLE Gain, Flat Gain, and Output Linearity
- Integrated AUX Channel Listener for D3 Power Saving Mode
- I2C Slave Support with Speed up to 1MHz
- Very-Low DisplayPort Active Mode and Power Saving Mode Operation
- Interchangeable Input Channel Polarity
- Single Power Supply: 1.8V ±5%
- Industrial Temperature Support: -40°C to +85°C
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- For automotive applications requiring specific change control (i.e. parts qualified to AEC-Q100/101/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please [contact us](mailto:contact@diodes.com) or your local Diodes representative.
<https://www.diodes.com/quality/product-definitions/>

Description

The PI2DPX1263 is a non-blocking DisplayPort2.0/DP1.4 linear ReDriver™ with four channels operated by 1.8V power supply. The device supports UHBR10 (10Gbps), HBR3 (8.1Gbps), HBR2 (5.4Gbps), and RBR under various DisplayPort speeds. With the on-chip AUX channel listener, the device can automatically monitor the system operation status to enter power saving mode via the DPCD register traffic check and activate the negotiated lane count for operation.

The non-blocking linear ReDriver design ensures the differential signals conveying pre-shoot and de-emphasis equalization waveform messages from transmitter side to receiver side, which helps optimize the overall channel link adjustment conducted by the system transmitter and receiver with DFE. The CTLE equalizers are implemented at the inputs of the ReDriver to compensate the channel loss and reduce the ISI jitters. The programmable flat gain and linearity adjustments support the eye diagram opening. The CTLE EQ gains, flat gains, and linearity are individually programmable on each channel for flexible tuning via I2C register settings.

Application Example

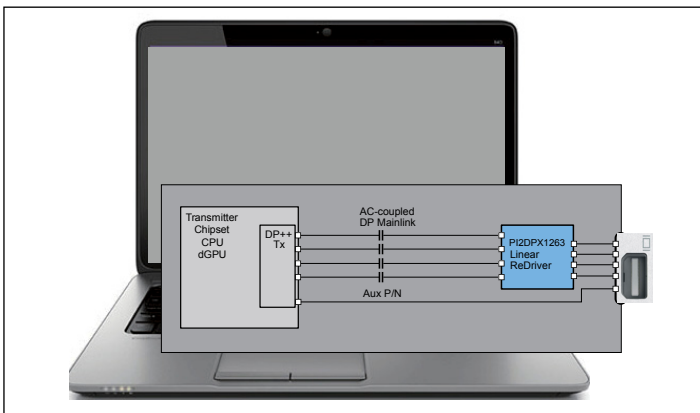

System with DisplayPort Connector Application

Applications

- Laptop PCs
- Desktop PCs
- Gaming Consoles
- VR/AR Goggles
- Active Cables
- Embedded Display Panels

Ordering Information

Part Number	Package Code	Description
PI2DPX1263XUAEX	XUA	32-pin, 2.85x4.5mm (X2QFN)

Notes:

1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
2. See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
4. E = Pb-free and Green
5. X suffix = Tape/Reel

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.