

ZUMT617TA Datasheet



www.digi-electronics.com

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	ZUMT617TA-DG
Manufacturer	Diodes Incorporated
Manufacturer Product Number	ZUMT617TA
Description	TRANS NPN 15V 1.5A SC70-3
Detailed Description	Bipolar (BJT) Transistor NPN 15 V 1.5 A 180MHz 385 mW Surface Mount SOT-323



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

ZUMT617TA

Series:

Super323™

Transistor Type:

NPN

Voltage - Collector Emitter Breakdown (Max):

15 V

Current - Collector Cutoff (Max):

10nA

Power - Max:

385 mW

Operating Temperature:

-55°C ~ 150°C (TJ)

Package / Case:

SC-70, SOT-323

Base Product Number:

ZUMT617

Manufacturer:

Diodes Incorporated

Product Status:

Active

Current - Collector (Ic) (Max):

1.5 A

Vce Saturation (Max) @ Ib, Ic:

245mV @ 20mA, 1.5A

DC Current Gain (hFE) (Min) @ Ic, Vce:

300 @ 100mA, 2V

Frequency - Transition:

180MHz

Mounting Type:

Surface Mount

Supplier Device Package:

SOT-323

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8541.21.0075

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

Super323™ SOT323 NPN SILICON POWER (SWITCHING) TRANSISTOR

ZUMT617

ISSUE 1 - SEPTEMBER 1998

FEATURES

- * **500mW POWER DISSIPATION**
- * **I_C CONT 1.5A**
- * 5A Peak Pulse Current
- * Excellent H_{FE} Characteristics Up To 5A (pulsed)
- * Extremely Low Equivalent On Resistance; R_{CE(sat)}

APPLICATIONS

- * DC-DC converter boost functions
- * Motor drive functions



DEVICE TYPE	COMPLEMENT	PARTMARKING	R _{CE(sat)}
ZUMT617	ZUMT717	T61	135mΩ at 1.5A

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V _{CBO}	15	V
Collector-Emitter Voltage	V _{CEO}	15	V
Emitter-Base Voltage	V _{EBO}	5	V
Peak Pulse Current**	I _{CM}	5	A
Continuous Collector Current	I_C	1.5	A
Base Current	I _B	200	mA
Power Dissipation at T_{amb}=25°C*	P_{tot}	385 † 500 ‡	mW
Operating and Storage Temperature Range	T _j ; T _{stg}	-55 to +150	°C

† Recommended P_{tot} calculated using FR4 measuring 10 x 8 x 0.6mm (still air).

‡ Maximum power dissipation is calculated assuming that the device is mounted on FR4 size 25x25x0.6mm and using comparable measurement methods adopted by other suppliers.

ZUMT617


ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	15			V	$I_C = 100\mu\text{A}$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	15			V	$I_C = 10\text{mA}^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	5			V	$I_E = 100\mu\text{A}$
Collector Cut-Off Current	I_{CBO}			10	nA	$V_{CB} = 10\text{V}$
Emitter Cut-Off Current	I_{EBO}			10	nA	$V_{EB} = 4\text{V}$
Collector Emitter Cut-Off Current	I_{CES}			10	nA	$V_{CES} = 10\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		16.5 40 75 150 205	20 55 100 200 245	mV mV mV mV mV	$I_C = 100\text{mA}, I_B = 10\text{mA}^*$ $I_C = 250\text{mA}, I_B = 10\text{mA}^*$ $I_C = 500\text{mA}, I_B = 10\text{mA}^*$ $I_C = 1\text{A}, I_B = 10\text{mA}^*$ $I_C = 1.5\text{A}, I_B = 20\text{mA}^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		930	1100	mV	$I_C = 1.5\text{A}, I_B = 20\text{mA}^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$		865	1100	mV	$I_C = 1.5\text{A}, V_{CE} = 2\text{V}^*$
Static Forward Current Transfer Ratio	h_{FE}	200 300 250 200 75 30	420 450 390 300 150 75			$I_C = 10\text{mA}, V_{CE} = 2\text{V}^*$ $I_C = 100\text{mA}, V_{CE} = 2\text{V}^*$ $I_C = 500\text{mA}, V_{CE} = 2\text{V}^*$ $I_C = 1\text{A}, V_{CE} = 2\text{V}^*$ $I_C = 3\text{A}, V_{CE} = 2\text{V}^*$ $I_C = 5\text{A}, V_{CE} = 2\text{V}^*$
Transition Frequency	f_T		180		MHz	$I_C = 50\text{mA}, V_{CE} = 10\text{V}$ $f = 100\text{MHz}$
Output Capacitance	C_{obo}		15		pF	$V_{CB} = 10\text{V}, f = 1\text{MHz}$
Turn-On Time	$t_{(on)}$		50		ns	$V_{CC} = 10\text{V}, I_C = 1\text{A}$ $I_{B1} = I_{B2} = 100\text{mA}$
Turn-Off Time	$t_{(off)}$		250		ns	

*Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$

ZUMT617

TYPICAL CHARACTERISTICS

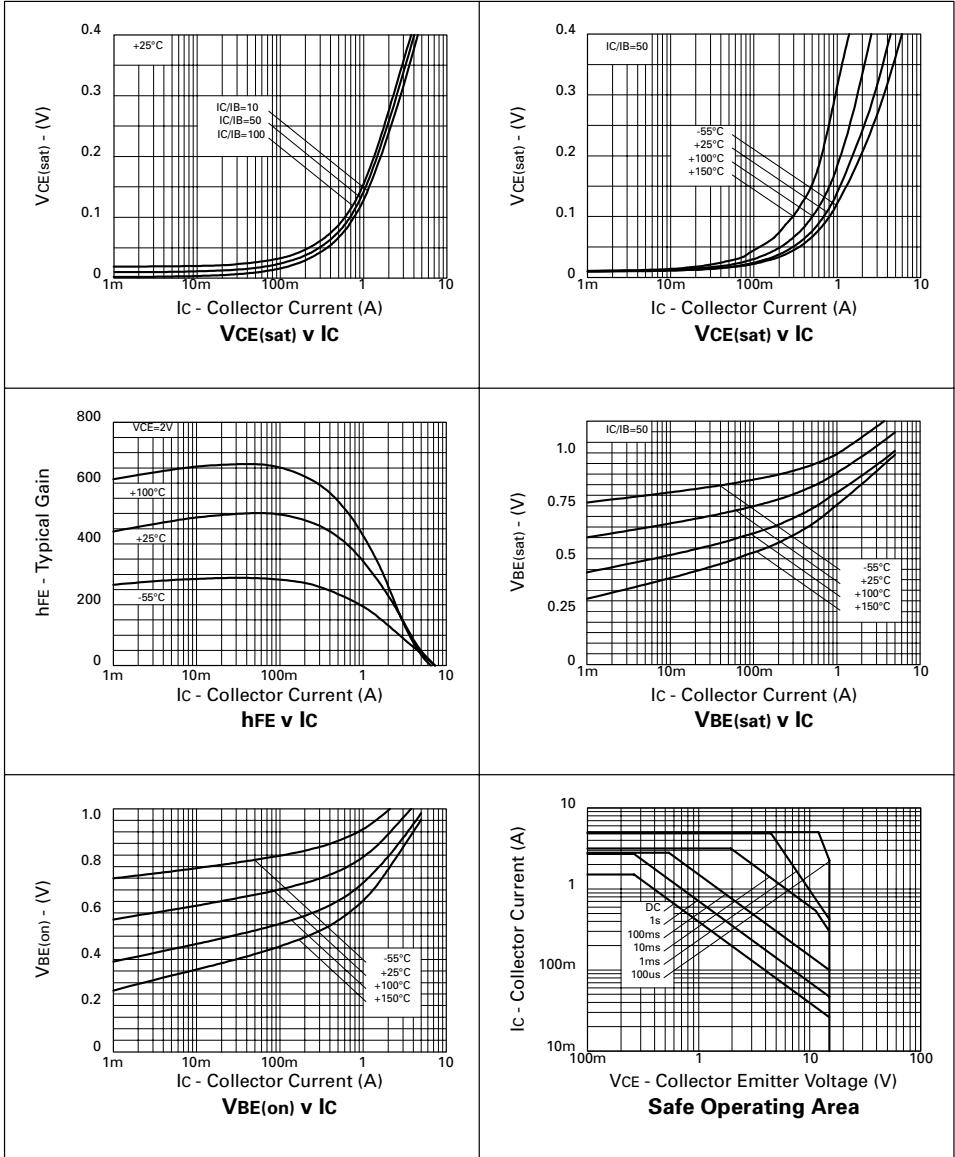

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we strictly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.