

2JS 6 Datasheet

www.digi-electronics.com



<https://www.DiGi-Electronics.com>

| | |
|------------------------------|---|
| DiGi Electronics Part Number | 2JS 6-DG |
| Manufacturer | Bel Fuse Inc. |
| Manufacturer Product Number | 2JS 6 |
| Description | FUSE GLASS 6A 350VAC 140VDC 2AG |
| Detailed Description | 6 A 350 V AC 140 V DC Fuse Cartridge, Glass Requires Holder 2AG, 5mm x 15mm |

This model 2JS 6 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

2JS 6

Series:

2JS

Mounting Type:

Requires Holder

Current Rating (Amps):

6 A

Voltage Rating - DC:

140 V

Package / Case:

2AG, 5mm x 15mm

Melting I²t:

211

Operating Temperature:

-55°C ~ 125°C

Size / Dimension:

0.201" Dia x 0.543" L (5.10mm x 13.80mm)

Manufacturer:

Bel Fuse Inc.

Product Status:

Obsolete

Fuse Type:

Cartridge, Glass

Voltage Rating - AC:

350 V

Response Time:

Slow Blow

Breaking Capacity @ Rated Voltage:

100A AC, 150A DC

Approval Agency:

CE, CSA, PSE, UR

Color:

-

DC Cold Resistance:

0.015 Ohms

Environmental & Export classification

RoHS Status:

RoHS non-compliant

REACH Status:

REACH Unaffected

HTSUS:

8536.10.0020

Moisture Sensitivity Level (MSL):

Not Applicable

ECCN:


EAR99

bel *defining a degree of excellence*

JSD0903

Type 2JS / 3JS Time-lag Fuse Series

5 x 15mm Glass Tube

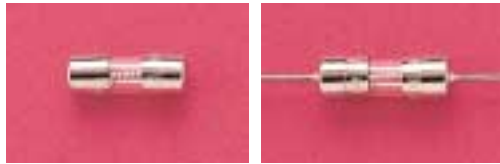

Electrical Characteristics (UL/CSA STD. 248-14)

| Testing current | Blow Time | |
|-----------------|-----------|----------|
| | Minimum | Maximum |
| 100% | 4 hrs. | N/A |
| 135% | N/A | 1 hr |
| 200% | 3 sec | 20 sec |
| 500% | 100 msec | 1.5 sec |
| 1000% | 30 msec | 300 msec |

Approvals



| Safety Agency Approvals | Type | Amp range / Volt @ I.R. ability |
|--|---------|---|
| Recognized File No. E20624 | 2JS/3JS | 100mA - 7A / 350V AC@ 100A 100mA - 7A / 125V AC@ 10,000A 100mA - 7A / 140V DC@ 150A |
| Acceptance File No. LR39772 | 2JS/3JS | 100mA - 7A / 350V AC@ 100A 100mA - 7A / 125V AC@ 10,000A |
| File No. JET1037-31003-1001, JET1037-31003-1003 | 2JS/3JS | 1A - 5A / 125V AC@ 500A |
| File No. JET1037-31003-1002 | 2JS | >5A - 15A / 125V AC@ 300A |

Operating Temperature

-55°C to +125°C

Physical Specification

Materials

Glass body / Nickel Plated Brass Caps

LeadWire:

Tin-lead plated Copper, Diameter 0.032"

Option

With Heat Shrink Tubing (VW-1) over body

Marking

On fuse:

"bel", "JS", "Current Rating", "350V"
"Appropriate Safety Logos"

On label:

Above info plus "CE"; Interrupting Rating & Type
"2JS" or "3JS"

Packaging

1. In bulk:

2JS - 2,000 pcs; 3JS - 500 pcs per box

2. On Axial Tape & Reel: 1,500 pcs per reel

3. Tape & Reel specification:

per EIA-296-E & IEC 286-1


@ 10mm Pitch and 52.4mm inside Tape Spacing

| Catalog Number | Ampere Rating | Typical Cold Resistance (ohm) | Volt-drop @100% I _n (Volt) max. | Melting I ² T < 10 mSec (A ² Sec) | Melting I ² T @10 I _n (A ² Sec) | Maximum Power Dissipation (W) |
|----------------|---------------|-------------------------------|--|---|--|-------------------------------|
| JS 100 | 100mA | 11.00 | 1.55 | 0.068 | 0.088 | 0.22 |
| JS 125 | 125mA | 7.62 | 1.35 | 0.107 | 0.138 | 0.245 |
| JS 150 | 150mA | 5.28 | 1.17 | 0.167 | 0.216 | 0.273 |
| JS 200 | 200mA | 3.66 | 1.02 | 0.26 | 0.34 | 0.303 |
| JS 250 | 250mA | 2.54 | 0.89 | 0.41 | 0.53 | 0.338 |
| JS 300 | 300mA | 1.76 | 0.77 | 0.64 | 0.83 | 0.376 |
| JS 350 | 350mA | 1.46 | 0.72 | 0.80 | 1.03 | 0.40 |
| JS 400 | 400mA | 1.22 | 0.67 | 0.99 | 1.29 | 0.42 |
| JS 500 | 500mA | 0.84 | 0.59 | 1.55 | 2.03 | 0.47 |
| JS 750 | 750mA | 0.487 | 0.48 | 3.04 | 3.97 | 0.55 |
| JS 1 | 1A | 0.281 | 0.387 | 5.93 | 7.76 | 0.64 |
| JS 1.25 | 1.25A | 0.195 | 0.337 | 9.3 | 12.2 | 0.71 |
| JS 1.5 | 1.5A | 0.135 | 0.293 | 14.5 | 19.0 | 0.80 |
| JS 2 | 2A | 0.094 | 0.255 | 22.6 | 29.8 | 0.89 |
| JS 2.5 | 2.5A | 0.065 | 0.222 | 35.3 | 46.6 | 0.99 |
| JS 3 | 3A | 0.045 | 0.194 | 55.2 | 72.9 | 1.10 |
| JS 3.5 | 3.5A | 0.037 | 0.181 | 69 | 91 | 1.16 |
| JS 4 | 4A | 0.031 | 0.168 | 86 | 114 | 1.22 |
| JS 5 | 5A | 0.022 | 0.147 | 135 | 179 | 1.4 |
| JS 6 | 6A | 0.015 | 0.128 | 211 | 279 | 1.5 |
| JS 7 | 7A | 0.012 | 0.119 | 263 | 350 | 1.6 |

Consult manufacturer for other ratings

*2JS are cartridge fuses
3JS are pigtail fuses

Mechanical Dimensions

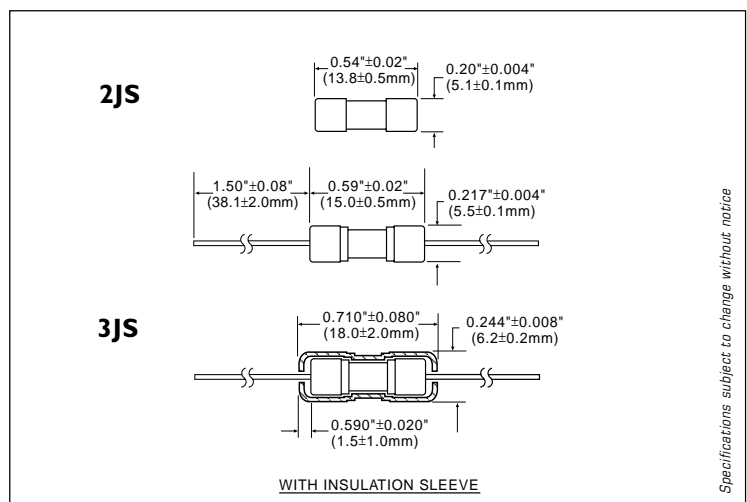

Specifications subject to change without notice

ORDERING INFORMATION SEE PAGES 67 & 68

defining a degree of excellence




Type 2JS / 3JS
Time-lag Fuse Series

5 x 15mm Glass Tube

JSC0801

2JS / 3JS - TIME CURRENT CHARACTERISTIC CURVE

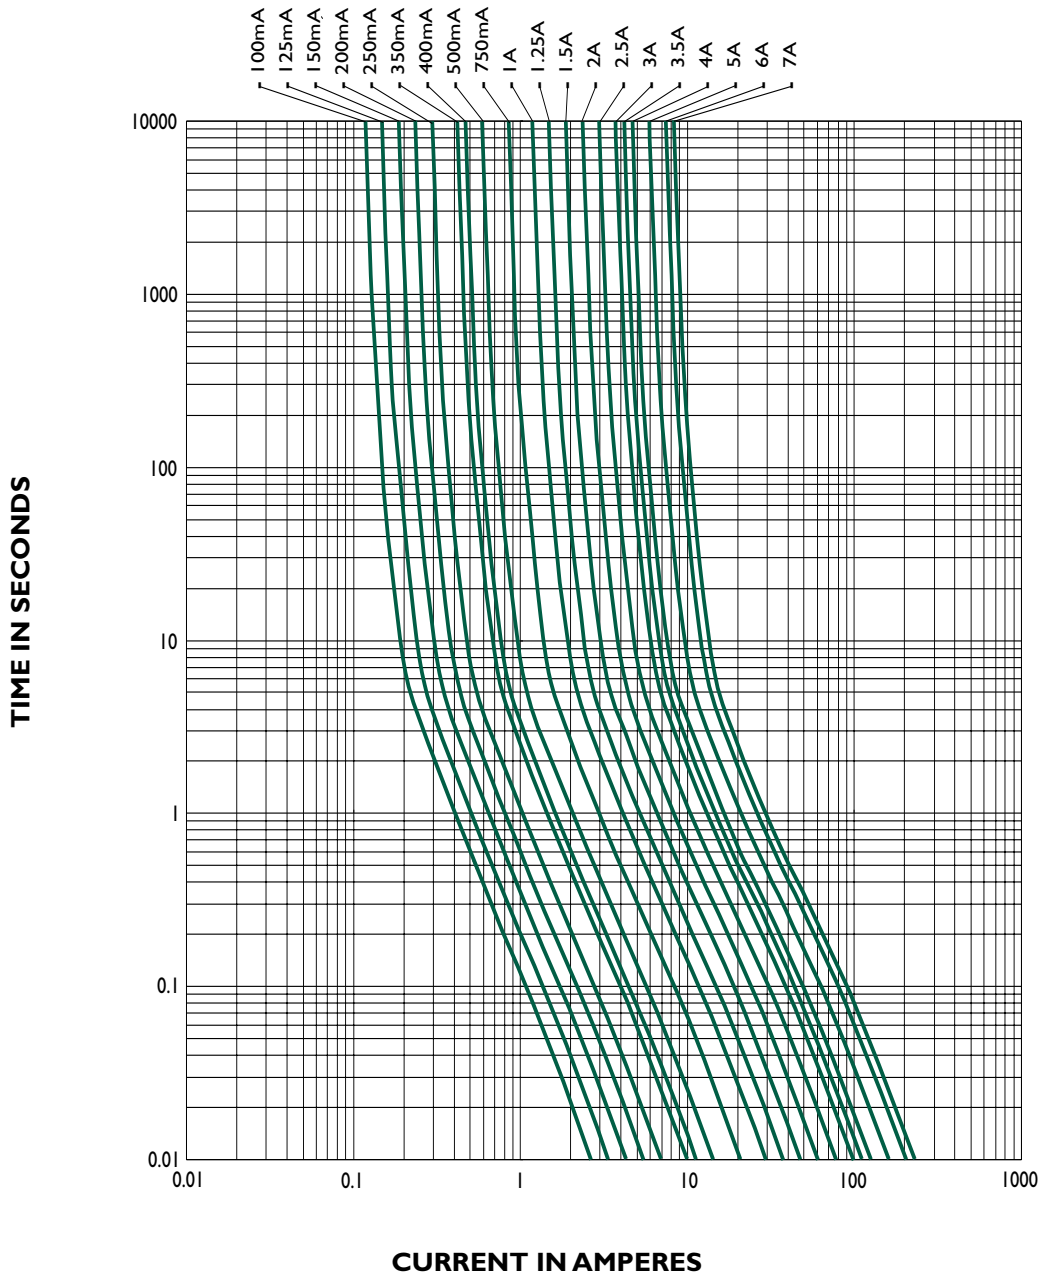

Specifications subject to change without notice

NOTE - see important information under "User Guide" on P.08

Corporate Office
Bel Fuse Inc.
206 Van Vorst Street, Jersey City, NJ 07302
Tel: 201-432-0463
Fax: 201-432-9542
E-Mail: belfuse@belfuse.com
Website: www.belfuse.com

Far East Office
Bel Fuse Ltd.
8F/8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel: 852-2328-5515
Fax: 852-2352-3706

European Office
Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Preston PR1 8UD
Lancashire, U.K
Tel: 44-1772-556601
Fax: 44-1772-888366

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.