

HLMP-3301 Datasheet



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	HLMP-3301-DG
Manufacturer	Broadcom Limited
Manufacturer Product Number	HLMP-3301
Description	LED RED DIFFUSED T-1 3/4 T/H
Detailed Description	Red 626nm LED Indication - Discrete 1.9V Radial

This model HLMP-3301 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

HLMP-3301

Series:

-

Color:

Red

Lens Color:

Red

Millicandela Rating:

5.4mcd

Lens Size:

5mm, T-1 3/4

Current - Test:

10mA

Mounting Type:

Through Hole

Wavelength - Peak:

635nm

Package / Case:

Radial

Size / Dimension:

-

Base Product Number:

HLMP-3301

Manufacturer:

Broadcom Limited

Product Status:

Active

Configuration:

Standard

Lens Transparency:

Diffused

Lens Style:

Round with Domed Top

Voltage - Forward (Vf) (Typ):

1.9V

Viewing Angle:

60°

Wavelength - Dominant:

626nm

Features:

-

Supplier Device Package:

T-1 3/4

Height (Max):

9.19mm

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8541.41.0000

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99



HLMP-3301, HLMP-3401, HLMP-3507, HLMP-3762, HLMP-3862, HLMP-3962, HLMP-D401

T-1³/₄ (5 mm) Diffused LED Lamps




Description

This family of T-1³/₄ tinted, diffused LED lamps is widely used in general-purpose indicator applications. Diffusants, tints, and optical design are balanced to yield superior light output and wide viewing angles. Several intensity choices are available in each color for increased design flexibility.

Features

- High intensity
- Choice of four bright colors
 - Red
 - Orange
 - Yellow
 - Green
- Popular T-1³/₄ diameter package
- Selected minimum intensities
- Wide viewing angle
- General purpose leads
- Reliable and rugged
- Available on tape and reel

Package Dimensions

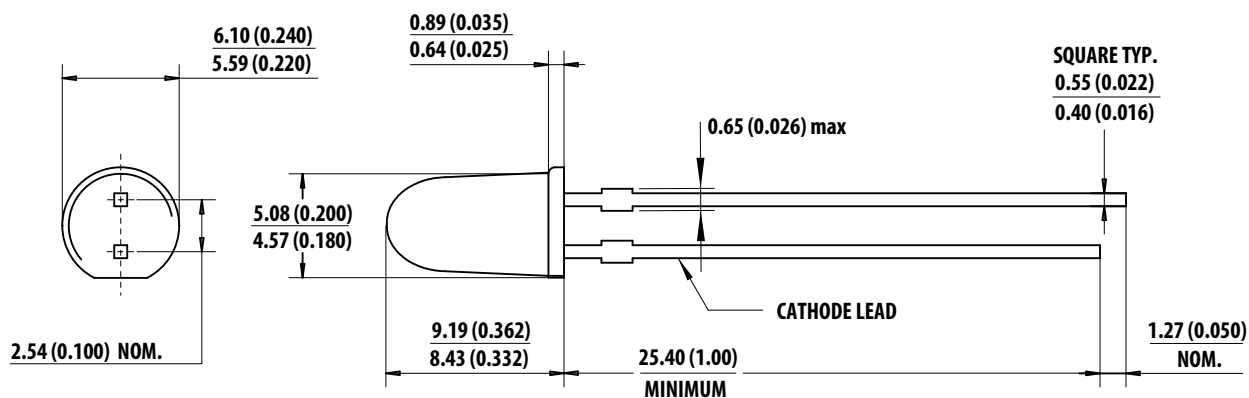

NOTE:

1. All dimensions are in mm (inches).
2. An epoxy meniscus may extend about 1 mm (0.040 in.) down the leads.
3. For PCB hole recommendations, see [Precautions](#).

Device Selection Guide

Material/Color	Part Number	Luminous Intensity , I _v (mcd) at 10 mA	
		Min.	Max.
AlInGaP Red	HLMP-3301	6.1	—
	HLMP-3301-D00xx	2.4	—
	HLMP-3301-F00xx	6.1	—
	HLMP-3762	9.7	—
	HLMP-3762-G00xx	9.7	—
AlInGaP Yellow	HLMP-3401	6.5	—
	HLMP-3401-E00xx	6.5	—
	HLMP-3862	10.3	—
AlInGaP Orange	HLMP-D401	6.1	—
AlInGaP Green	HLMP-3507	4.7	—
	HLMP-3507-D00xx	4.7	—
	HLMP-3962	12.0	—
	HLMP-3962-F00xx	12.0	—

Absolute Maximum Ratings at T_A = 25°C

Parameter	Red/Orange	Yellow	Green	Units
Peak Forward Current	90	60	90	mA
Average Forward Current ^a	25	20	25	mA
DC Current ^b	30	20	30	mA
Power Dissipation ^c	135	85	135	mW
Reverse Voltage (I _R = 100 µA)	5	5	5	V
LED Junction Temperature	110	110	110	°C
Operating Temperature Range	-40 to +100	-40 to +100	-20 to +100	°C
Storage Temperature Range	-40 to +100	-40 to +100	-40 to +100	°C

a. See [Figure 4](#) (Red/Orange), [Figure 8](#) (Yellow), or [Figure 12](#) (Green) to establish pulsed operating conditions.

b. For Red, Orange and Green series, derate linearly from 50°C at 0.5 mA/°C. For Yellow series, derate linearly from 50°C at 0.2 mA/°C.

c. 1.8 mW/°C. For Yellow series, derate power linearly from 50°C at 1.6 mW/°C.

Optical/Electrical Characteristics at $T_A = 25^\circ\text{C}$

Symbol	Parameter	Color	Min.	Typ.	Max.	Units	Test Condition
$2\theta_{1/2}$	Included Angle Between Half Luminous Intensity Points	Red	—	60	—	Deg.	$I_F = 10\text{ mA}$, see Note ^a
		Orange	—	60	—		
		Yellow	—	60	—		
		Green	—	60	—		
λ_{PEAK}	Peak Wavelength	Red	—	632	—	nm	Measurement at Peak
		Orange	—	610	—		
		Yellow	—	590	—		
		Green	—	570	—		
$\Delta\lambda_{1/2}$	Spectral Line Halfwidth	Red	—	14	—	nm	
		Orange	—	13	—		
		Yellow	—	12	—		
		Green	—	13	—		
λ_d	Dominant Wavelength	Red	—	626	—	nm	See Note ^b
		Orange	—	605	—		
		Yellow	—	589	—		
		Green	—	569	—		
τ_s	Speed of Response	Red	—	90	—	ns	
		Orange	—	280	—		
		Yellow	—	90	—		
		Green	—	500	—		
C	Capacitance	Red	—	11	—	pF	$V_F = 0$; $f = 1\text{ MHz}$
		Orange	—	4	—		
		Yellow	—	15	—		
		Green	—	18	—		
$R\theta_{\text{J-PIN}}$	Thermal Resistance	All	—	260	—	$^\circ\text{C/W}$	Junction to Cathode Lead
V_F	Forward Voltage	Red/Orange	—	1.9	2.4	V	$I_F = 10\text{ mA}$
		Yellow	—	1.9	2.4		
		Green	—	2	2.7		
V_R	Reverse Breakdown Voltage	All	5.0	—	—	V	$I_R = 100\ \mu\text{A}$
η_V	Luminous Efficacy	Red	—	180	—	lumens/Watt	See Note ^c
		Orange	—	350	—		
		Yellow	—	500	—		
		Green	—	640	—		

- a. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- b. The dominant wavelength, λ_d , is derived from the CIE chromaticity diagram and represents the single wavelength that defines the color of the device.
- c. Radiant intensity, I_e , in Watts/steradian, may be found from the equation $I_e = I_v / \eta_v$, where I_v is the luminous intensity in candelas and η_v is the luminous efficacy in lumens/Watt.

Part Numbering System

H L M P -

x ₁	x ₂	x ₃	x ₄
----------------	----------------	----------------	----------------

 -

x ₅	x ₆	x ₇	x ₈	x ₉
----------------	----------------	----------------	----------------	----------------

Code	Description	Option	
x ₁	Package Type	3	T - 1¾ (5 mm)
		D	T - 1¾ (5 mm) Orange
x ₂	Color	3, 7	Red
		4, 8	Yellow (except D4xx)
		5, 9	Green
x ₃ x ₄	Brightness Level	0x	Less brightness
		62	Higher brightness
x ₅	Minimum Intensity Bin	See Intensity Bin Limits	
x ₆	Maximum Intensity Bin	0	Open bins (no max Iv bin limit)
x ₇	Color Bin Option	0	Full distribution
x ₈ x ₉	Packing Option	00	Bulk (Loose forms packaging)
		01	Tape and Reel, Crimped Leads
		02	Tape and Reel, Straight Leads
		B1	Right Angle Housing, Uneven Leads
		B2	Right Angle Housing, Even Leads
		DD	Ammopack
		R4	Tape and Reel, Counter Clockwise

Bin Information

Intensity Bin Limits

Color	Bin	Intensity Range (mcd)	
		Min.	Max.
Red/Orange	D	2.4	3.8
	E	3.8	6.1
	F	6.1	9.7
	G	9.7	15.5
	H	15.5	24.8
	I	24.8	39.6
	J	39.6	63.4
	K	63.4	101.5
	L	101.5	162.4
	M	162.4	234.6
	N	234.6	340.0
	O	340.0	540.0
	P	540.0	850.0
	Q	850.0	1200.0
	R	1200.0	1700.0
	S	1700.0	2400.0
	T	2400.0	3400.0
	U	3400.0	4900.0
	V	4900.0	7100.0
	W	7100.0	10200.0
X	10200.0	14800.0	
Y	14800.0	21400.0	
Z	21400.0	30900.0	

Color	Bin	Intensity Range (mcd)	
		Min.	Max.
Yellow	E	6.5	10.3
	F	10.3	16.6
	G	16.6	26.5
	H	26.5	42.3
	I	42.3	67.7
	J	67.7	108.2
	K	108.2	173.2
	L	173.2	250.0
	M	250.0	360.0
	N	360.0	510.0
	O	510.0	800.0
	P	800.0	1250.0
	Q	1250.0	1800.0
	R	1800.0	2900.0
	S	2900.0	4700.0
	T	4700.0	7200.0
	U	7200.0	11700.0
	V	11700.0	18000.0
	W	18000.0	27000.0
Green	D	4.7	7.6
	E	7.6	12.0
	F	12.0	19.1
	G	19.1	30.7
	H	30.7	49.1
	I	49.1	78.5
	J	78.5	125.7
	K	125.7	201.1
	L	201.1	289.0
	M	289.0	417.0
	N	417.0	680.0
	O	680.0	1100.0
	P	1100.0	1800.0
	Q	1800.0	2700.0
	R	2700.0	4300.0
	S	4300.0	6800.0
	T	6800.0	10800.0
	U	10800.0	16000.0
	V	16000.0	25000.0
W	25000.0	40000.0	

Maximum tolerance for each bin limit is $\pm 18\%$.

Color Categories

Color	Category Number	Lambda (nm)	
		Min.	Max.
Green	6	561.5	564.5
	5	564.5	567.5
	4	567.5	570.5
	3	570.5	573.5
	2	573.5	576.5
Yellow	1	582.0	584.5
	3	584.5	587.0
	2	587.0	589.5
	4	589.5	592.0
	5	592.0	593.0
Orange	1	597.0	599.5
	2	599.5	602.0
	3	602.0	604.5
	4	604.5	607.5
	5	607.5	610.5
	6	610.5	613.5
	7	613.5	616.5
	8	616.5	619.5


Packaging Option Matrix

Mechanical Option Code	Definition
00	Bulk Packaging, minimum increment 500 pieces/bag
01	Tape & Reel, crimped leads, minimum increment 1300 pieces/reel
02	Tape & Reel, straight leads, minimum increment 1300 pieces/reel
B1	Right Angle Housing, uneven leads, minimum increment 500 pieces/bag
B2	Right Angle Housing, even leads, minimum increment 500 pieces/bag
DD	Ammo Pack, straight leads with minimum increment 2000/pack
R4	Tape & Reel, straight leads, counter clockwise, anode lead leaving the reel first, minimum increment 1300 pieces/reel

NOTE: All categories are established for classification of products. Products may not be available in all categories. Contact your local Broadcom® representative for further clarification/information.

Tolerance for each bin limit is ±0.5 nm.

Figure 1: Relative Intensity vs. Wavelength

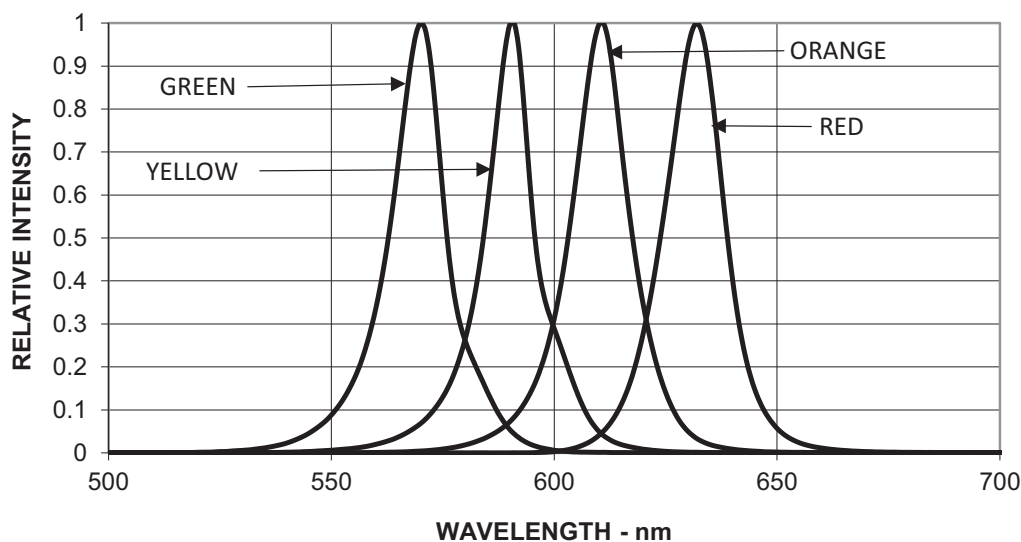

T-1¾ Red, Orange Diffused Lamps

Figure 2: Forward Current vs. Forward Voltage Characteristics

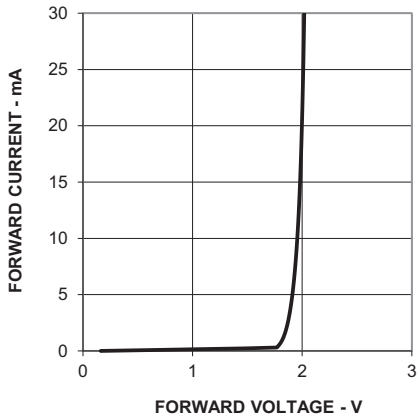


Figure 3: Relative Luminous Intensity vs. DC Forward Current

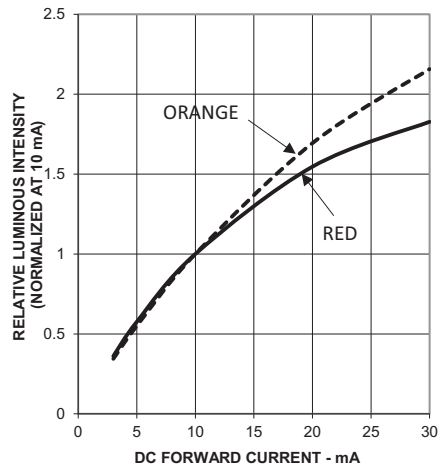


Figure 4: Maximum Tolerable Peak Current vs. Pulse Duration. (I_{DC} MAX as per MAX ratings)


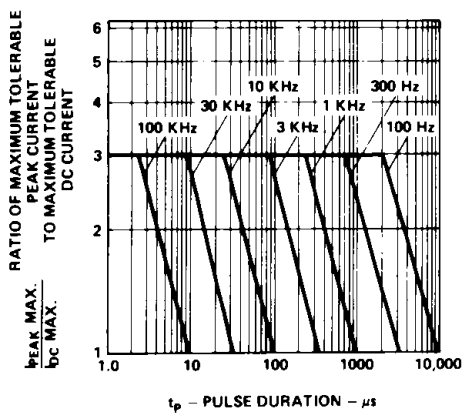


Figure 5: Relative Luminous Intensity vs. Angular Displacement

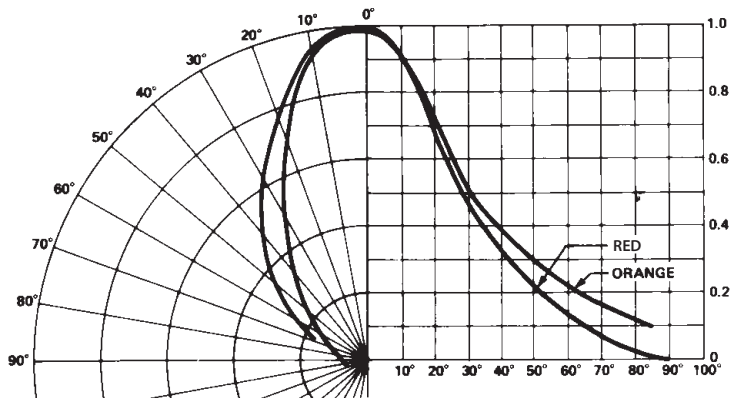

T-1¾ Yellow Diffused Lamps

Figure 6: Forward Current vs. Forward Voltage Characteristics

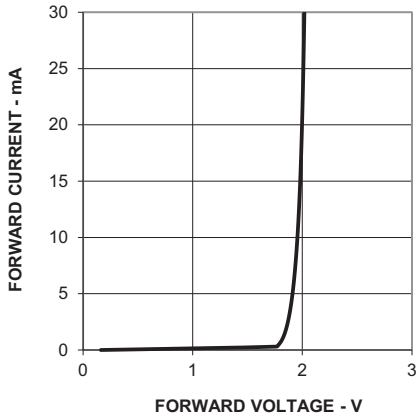


Figure 7: Relative Luminous Intensity vs. DC Forward Current

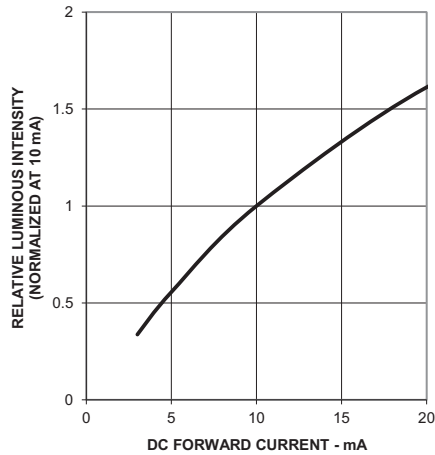


Figure 8: Maximum Tolerable Peak Current vs. Pulse Duration. (I_{DC} MAX as per MAX ratings)


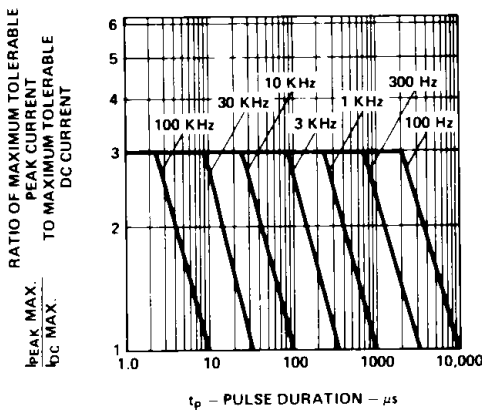


Figure 9: Relative Luminous Intensity vs. Angular Displacement

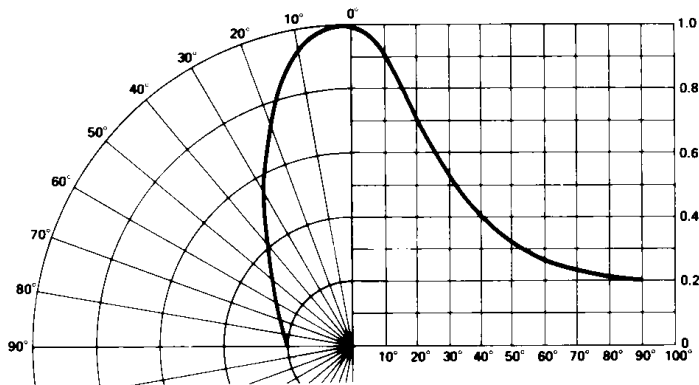

T-1¾ Green Diffused Lamps

Figure 10: Forward Current vs. Forward Voltage Characteristics

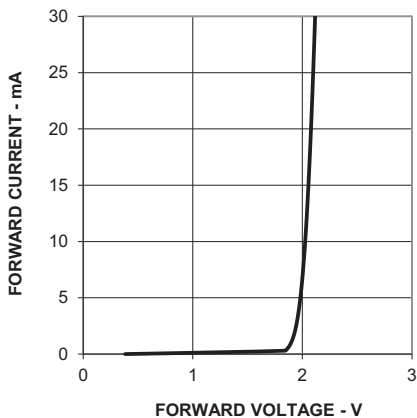


Figure 11: Relative Luminous Intensity vs. DC Forward Current

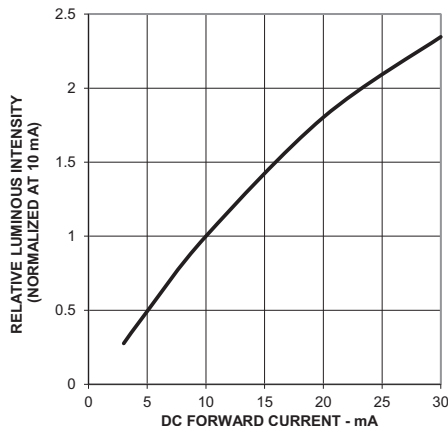


Figure 12: Maximum Tolerable Peak Current vs. Pulse Duration. (I_{DC} MAX as per MAX ratings)


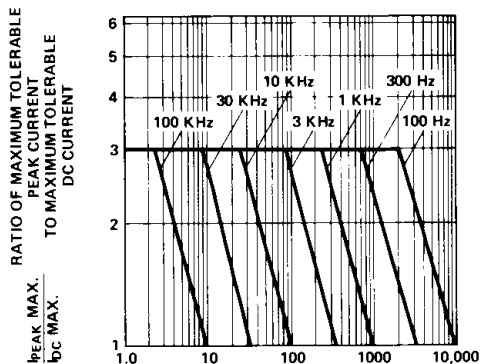


Figure 13: Relative Luminous Intensity vs. Angular Displacement

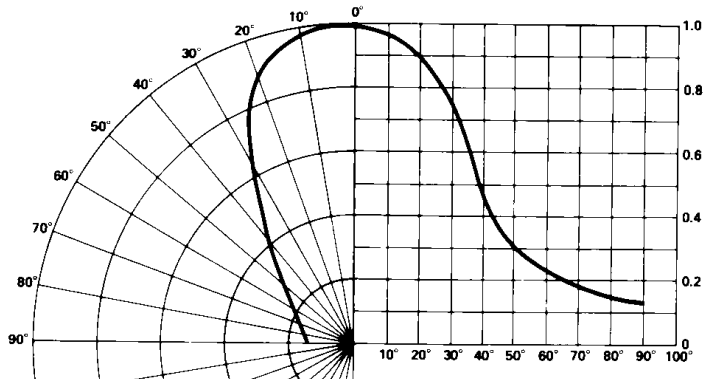


Precautions

Lead Forming

- The leads of an LED lamp may be preformed or cut to length prior to insertion and soldering on PC board.
- For better control, use the proper tool to precisely form and cut the leads to applicable length rather than doing it manually.
- If manual lead cutting is necessary, cut the leads after the soldering process. The solder connection forms a mechanical ground that prevents mechanical stress due to lead cutting from traveling into LED package. Use this method for the hand soldering operation, because the excess lead length also acts as small heat sink.

Soldering and Handling

- Take care during the PCB assembly and soldering process to prevent damage to the LED component.
- LED component may be effectively hand soldered to PCB. However, do this under unavoidable circumstances, such as rework. The closest manual soldering distance of the soldering heat source (soldering iron's tip) to the body is 1.59 mm. Soldering the LED using soldering iron tip closer than 1.59 mm might damage the LED.



- Apply ESD precautions on the soldering station and personnel to prevent ESD damage to the LED component that is ESD sensitive. Refer to Broadcom application note AN 1142 for details. The soldering iron used must have a grounded tip to ensure electrostatic charge is properly grounded.
- Recommended soldering condition.

Wave Soldering ^{a, b}	Manual Solder Dipping	
Pre-heat Temperature	105°C max.	—
Pre-heat Time	60s max.	—
Peak Temperature	250°C max.	260°C max.
Dwell Time	3s max.	5s max.

a. The preceding conditions refer to measurement with a thermocouple mounted at the bottom of the PCB.

b. Use only bottom pre-heaters to reduce thermal stress experienced by LED.

- Set and maintain wave soldering parameters according to the recommended temperature and dwell time. Perform daily checks on the soldering profile to ensure that it always conforms to the recommended soldering conditions.

NOTE:


1. PCBs with different size and design (component density) will have a different heat mass (heat capacity). This might cause a change in temperature experienced by the board if the same wave soldering setting is used. Therefore, recalibrate the soldering profile again before loading a new type of PCB.
2. Take extra precautions during wave soldering to ensure that the maximum wave temperature does not exceed 250°C and the solder contact time does not exceed 3s. Over-stressing the LED during the soldering process might cause premature failure to the LED due to delamination.
 - Loosely fit any alignment fixture that is being applied during wave soldering and do not apply weight or force on the LED. Use nonmetal material because it absorbs less heat during the wave soldering process.
 - At elevated temperature, LED is more susceptible to mechanical stress. Therefore, allow the PCB to cool down to room temperature prior to handling, which includes removal of alignment fixture or pallet.
 - If PCB board contains both through-hole (TH) LED and other surface-mount components, solder surface-mount components on the top side of the PCB. If the surface mount must be on the bottom side, solder these components using reflow soldering prior to the insertion of the TH LED.
 - The recommended PC board plated through holes (PTH) size for LED component leads follows.

	LED Component Lead Size	Diagonal	Plated Through-Hole Diameter
Lead size (typ.)	0.45 × 0.45 mm (0.018 × 0.018 in.)	0.636 mm (0.025 in.)	0.98 to 1.08 mm (0.039 to 0.043 in.)
Dambar shear-off area (max.)	0.65 mm (0.026 in.)	0.919 mm (0.036 in.)	
Lead size (typ.)	0.50 × 0.50 mm (0.020 × 0.020 in.)	0.707 mm (0.028 in.)	1.05 to 1.15 mm (0.041 to 0.045 in.)
Dambar shear-off area (max.)	0.70 mm (0.028 in.)	0.99 mm (0.039 in.)	

NOTE: Refer to application note AN1027 for more information on soldering LED components.

- Over-sizing the PTH can lead to twisted LED after clinching. On the other hand under sizing the PTH can cause difficulty inserting the TH LED.

Figure 14: Example of Wave Soldering Temperature Profile for TH LED

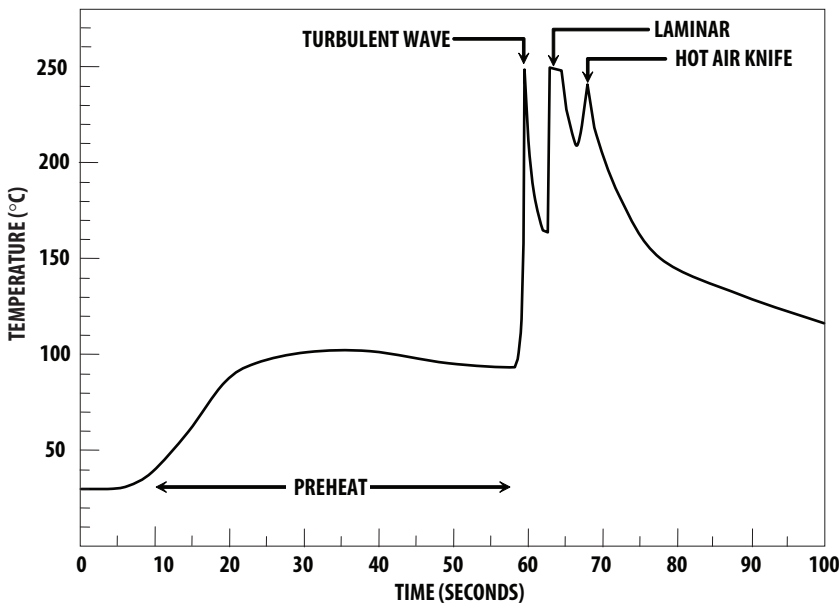

Recommended solder:
Sn63 (Leaded solder alloy)
SAC305 (Lead-free solder alloy)

Flux: Rosin flux

Solder bath temperature:
245°C ± 5 °C (maximum peak temperature = 250°C)

Dwell time: 1.5s – 3.0s (maximum = 3 seconds)

Note: Allow for board to be sufficiently cooled to room temperature before you exert mechanical force.

Broadcom, the pulse logo, Connecting everything, Avago Technologies, Avago, and the A logo are among the trademarks of Broadcom and/or its affiliates in the United States, certain other countries, and/or the EU.

Copyright © 2015–2021 Broadcom. All Rights Reserved.

The term “Broadcom” refers to Broadcom Inc. and/or its subsidiaries. For more information, please visit www.broadcom.com.

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.



Lead (Pb) Free
RoHS Compliant

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.