


# SMTL6-RC Datasheet

[www.digi-electronics.com](http://www.digi-electronics.com)



SMTL6-RC

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	SMTL6-RC-DG
Manufacturer	<a href="#">Bivar Inc.</a>
Manufacturer Product Number	SMTL6-RC
Description	LED RED CLEAR 6PLCC SMD
Detailed Description	Red 626nm LED Indication - Discrete 1.8V 6-SMD, J-Lead



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

SMTL6-RC

Series:

-

Color:

Red

Lens Color:

Colorless

Millicandela Rating:

1350mcd

Lens Size:

4.00mm Dia

Current - Test:

60mA

Mounting Type:

Surface Mount

Wavelength - Peak:

-

Package / Case:

6-SMD, J-Lead

Size / Dimension:

5.40mm L x 5.00mm W

Base Product Number:

SMTL6

Manufacturer:

Bivar Inc.

Product Status:

Active

Configuration:

Standard

Lens Transparency:

Clear

Lens Style:

Round with Flat Top

Voltage - Forward (Vf) (Typ):

1.8V

Viewing Angle:

140°

Wavelength - Dominant:

626nm

Features:

-

Supplier Device Package:

6-PLCC

Height (Max):

1.60mm

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8541.41.0000

Moisture Sensitivity Level (MSL):

4 (72 Hours)

ECCN:

EAR99

# PLCC6 SMD Top View Package LED SMTL6-RC, RED




## SMTL6-RC

- ◆ Industry Standard PLCC6 Footprint
- ◆ Low Profile Package
- ◆ High Luminous Intensity
- ◆ Wide Viewing Angle
- ◆ High Power Efficiency

Bivar SMTL6 LED is offered in an industry standard PLCC6 package with high luminous intensity and wide viewing angles. The miniature package is ideal for small scale applications such as illumination, general indication, and backlighting. Low power consumption and excellent long-life reliability are suitable for battery powered equipment. The flexible three chip design allows for a wide variety of lighting options where the chips can be individually driven or in combinations. Bivar SMTL6 LED is packaged in standard tape and reels for pick and place assemblies.

Part Number	Material	Emitted Color	Luminous Intensity Typ. mcd	Lens Color	Viewing Angle
SMTL6-RC	AlGaInP	Red	2100	Water Clear	120°

## Outline Dimensions

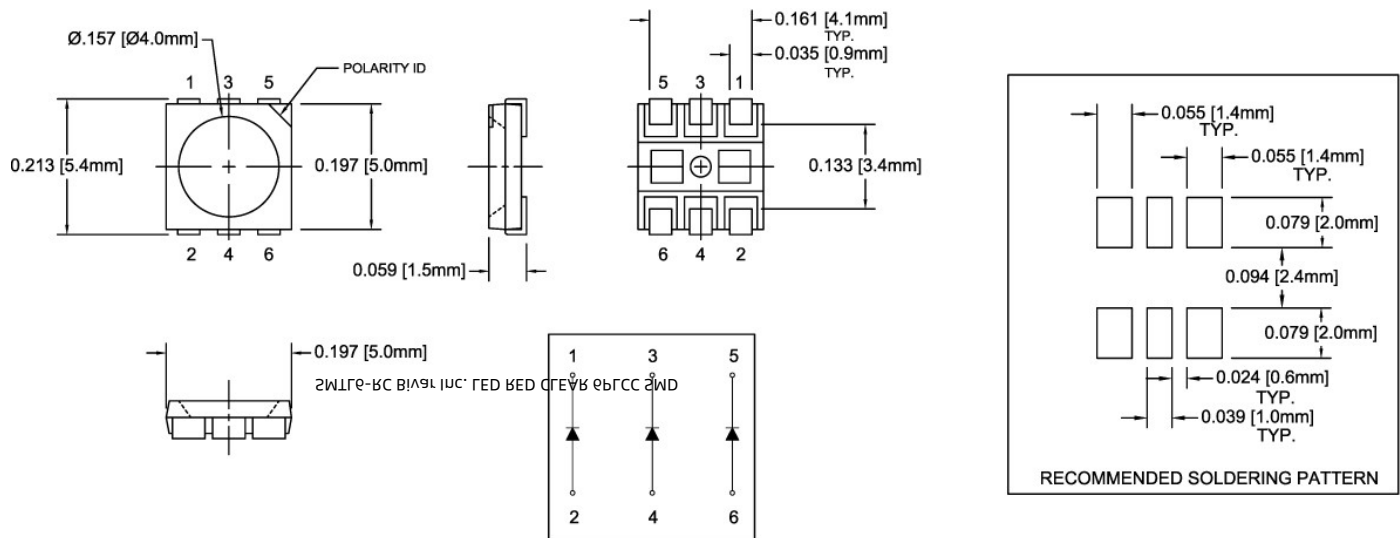

### Outline Drawings Notes:

1. All dimensions are in inches [millimeters].
2. Standard tolerance:  $\pm 0.010''$  unless otherwise noted.



Bivar reserves the right to make changes at any time without notice.

# PLCC6 SMD Top View Package LED SMTL6-RC, RED



## Absolute Maximum Ratings

T<sub>A</sub> = 25°C unless otherwise noted

Power Dissipation	195 mW
Continuous Forward Current	75 mA
Peak Forward Current <sup>1</sup>	100 mA
Electrostatic Discharge Classification (HBM)	2000 V
Reverse Voltage	5 V
Derating Linear from 25°C	0.4 mA/°C
Operating Temperature Range	-40 - +105°C
Storage Temperature Range	-40 - +105°C
Lead Soldering Temperature ( 3 mm from the base of the epoxy bulb ) <sup>2</sup>	250°C

Notes: 1. 10% Duty Cycle, Pulse Width ≤ 0.1 msec. 2. Solder time less than 4 seconds at temperature extreme.

**Handling:** Reflow soldering must not be performed more than twice. Hand soldering must not be performed more than once.

Sensitive to static electricity or surge voltage. Proper handling required to avoid ESD damage and impair LED reliability.

## Electrical / Optical Characteristics

T<sub>A</sub> = 25°C & I<sub>F</sub> = 60 mA unless otherwise noted

Emitting Color	Forward Voltage (V) <sup>1</sup>			Recommend Forward Current (mA)			Reverse Current (μA)	Dominant Wavelength (nm) <sup>2</sup>			Luminous Intensity I <sub>v</sub> (mcd) <sup>3</sup>			Viewing Angle 2θ ½ (deg)
	MIN	TYP	MAX	MIN	TYP	MAX	MAX	MIN	TYP	MAX	MIN	TYP	MAX	TYP
Red	2.0	2.3	2.6	/	60	/	10	620	625	629	1800	2100	2300	120°


Notes: 1. Tolerance of forward voltage: ±0.05V.

2. Tolerance of dominant wavelength: -1.0nm of MIN & +1.0nm of MAX.

3. Tolerance of luminous intensity: ±15%

## Directivity Radiation

T<sub>A</sub> = 25°C unless otherwise noted

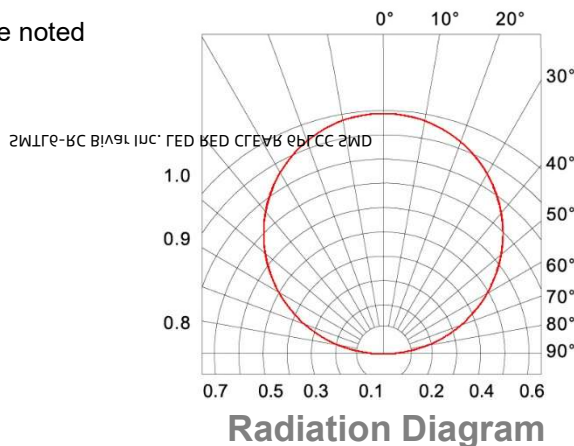

Bivar reserves the right to make changes at any time without notice.

# PLCC6 SMD Top View Package LED SMTL6-RC, RED



## Typical Electrical / Optical Characteristics Curves

$T_A = 25^\circ\text{C}$  unless otherwise noted

Relative Spectrum Emission  $I_{rel} = f(\lambda)$ ,  $T_A = 25^\circ\text{C}$ ,  $I_F = 60\text{ mA}$   
 $V(\lambda) = \text{Standard eye response curve}$

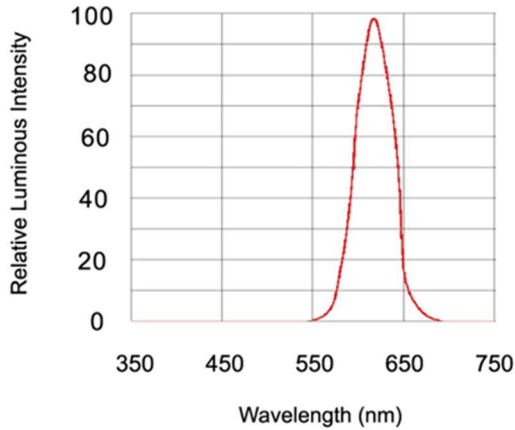


Fig.1 Relative Luminous Intensity vs. Wavelength

Forward Current  $I_F = f(V_F)$   
 $T_A = 25^\circ\text{C}$

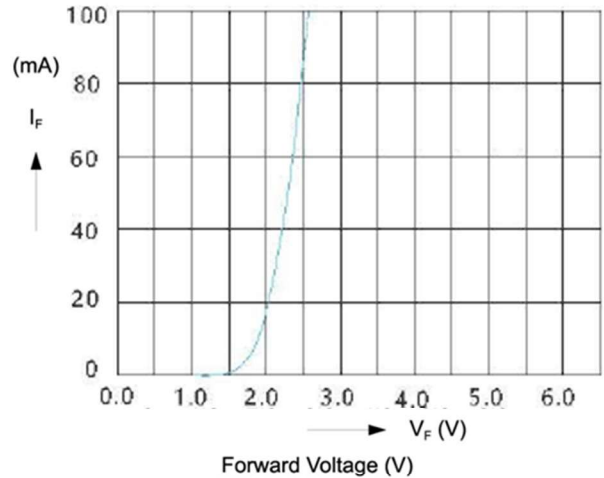


Fig.2 Forward Current vs. Forward Voltage

Relative Luminous Intensity  $I_V/I_V(60\text{ mA}) = f(I_F)$   
 $T_A = 25^\circ\text{C}$

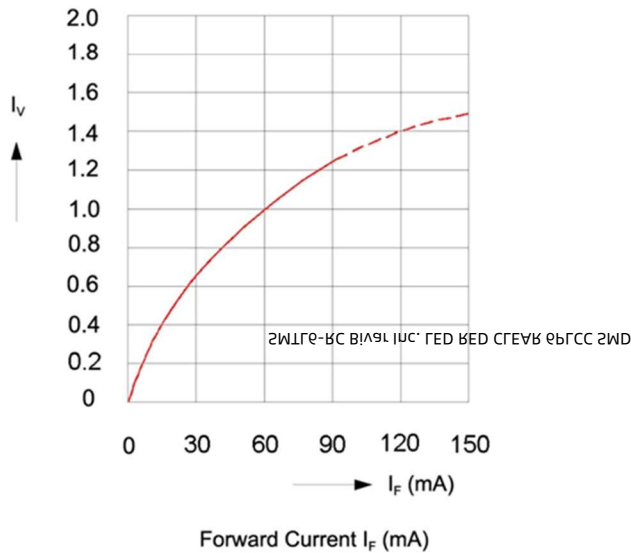


Fig.3 Relative Luminous Intensity vs. Forward Current

Ambient Temperature vs. Allowable Forward Current


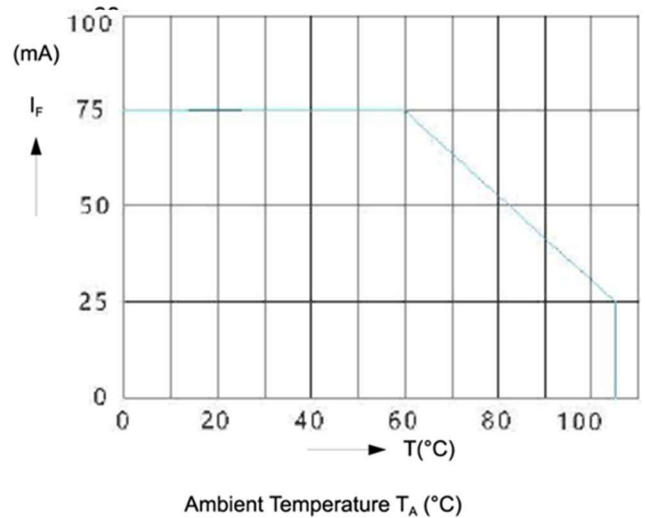


Fig.4 Forward Current vs. Ambient Temperature

Bivar reserves the right to make changes at any time without notice.

## Recommended Soldering Conditions

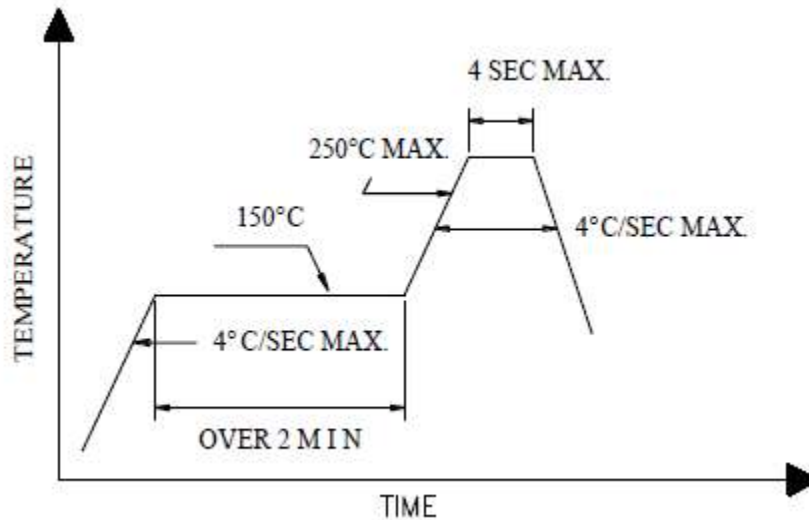

Reflow temperature at 245°C with Max. limited at 250°C.

Mechanical and thermal stress should be avoided when handling and heating during soldering process.  
No further handling immediately following soldering, until reaching room temperature.

## Soldering Iron

1. Temperature at tip of iron: 360 °C Max. (20W Max.)
2. Soldering time: 3 sec ± 1s per terminal

## Heat Management

Heat generation must be controlled during LED use. The temperature of the chips is affected by the thermal resistance of the PCB and LED density configuration.

Attention should be given to circuit board design for effective heat dispersion and therefore, not allowing the LED joint temperature exceeds the absolute maximum rated value.

In addition, the current shall be determined based on the Ambient Temperature surrounding the LED, and appropriate heat dissipation shall be implemented.

2MTL6-RC BIVAR INC LED RED CLEAR 09TCC 2MD

# PLCC6 SMD Top View Package LED SMTL6-RC, RED




## Storage

1. The storage temperature and R.H. are 5 °C ~30 °C, R.H. 60% Max.
2. Once the package is opened, the products should be used within 24 hrs. Otherwise, they should be kept in a damp proof box with a desiccating agent.
3. It is recommended to bake at 70 °C ± 3 °C for 48 hrs. before soldering after the package is unsealed for 24 hrs.

## Tape and Reel Dimensions

Note: 1000 pcs/Reel


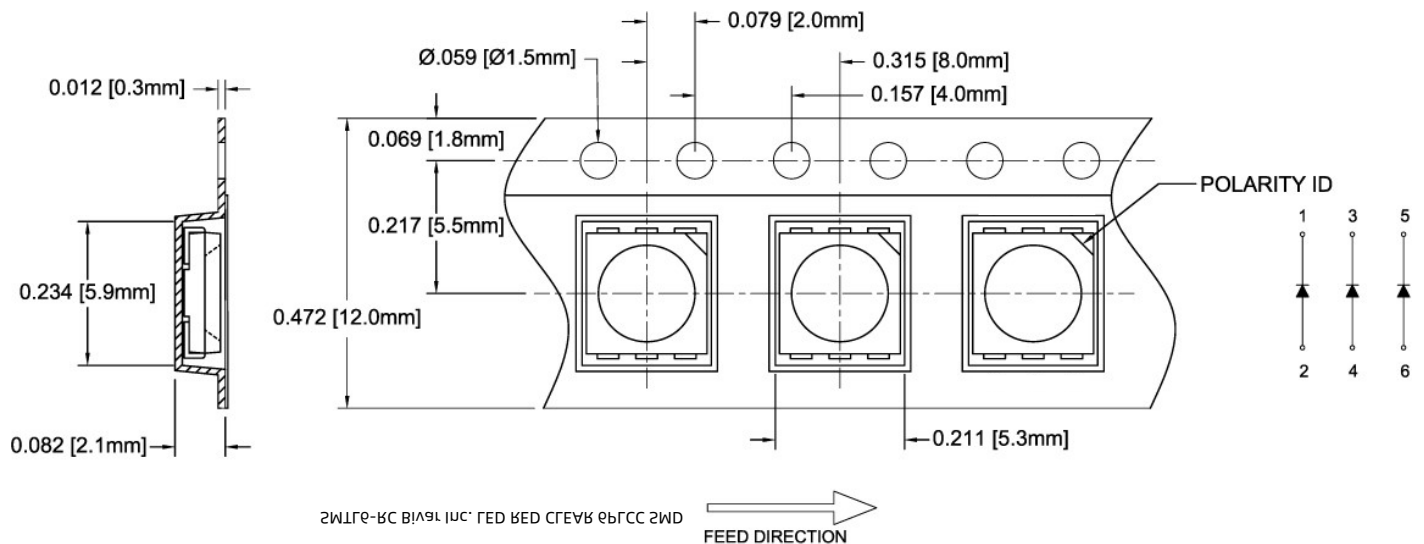


### Outline Drawings Notes:

1. All dimensions are in inches [millimeters].
2. Standard tolerance: ±0.010" unless otherwise noted.

Bivar reserves the right to make changes at any time without notice.

# PLCC6 SMD Top View Package LED SMTL6-RC, RED

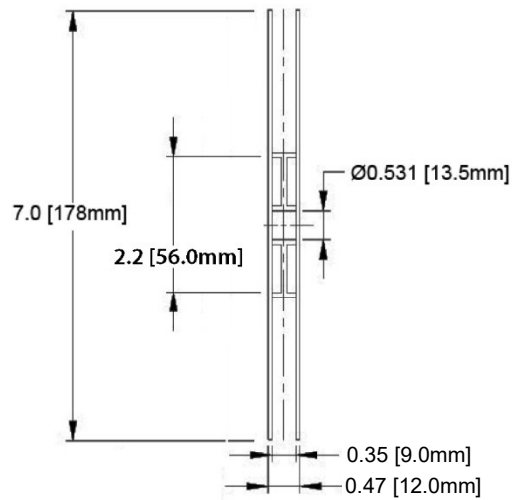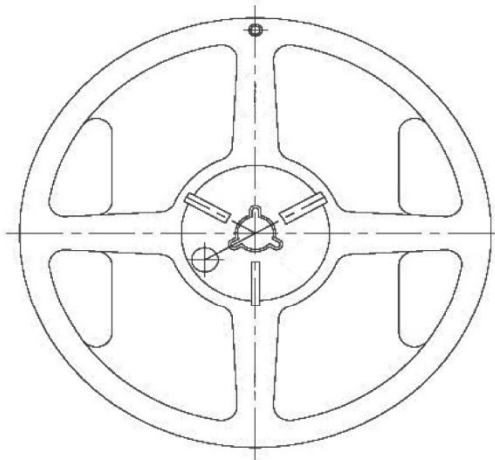


### Outline Drawings Notes:

1. All dimensions are in inches [millimeters].
2. Standard tolerance unless otherwise noted: X.XXX ± 0.010"  
X.X ± 0.1"

## Packaging and Labeling Plan

Note: 1 Reel / Bag

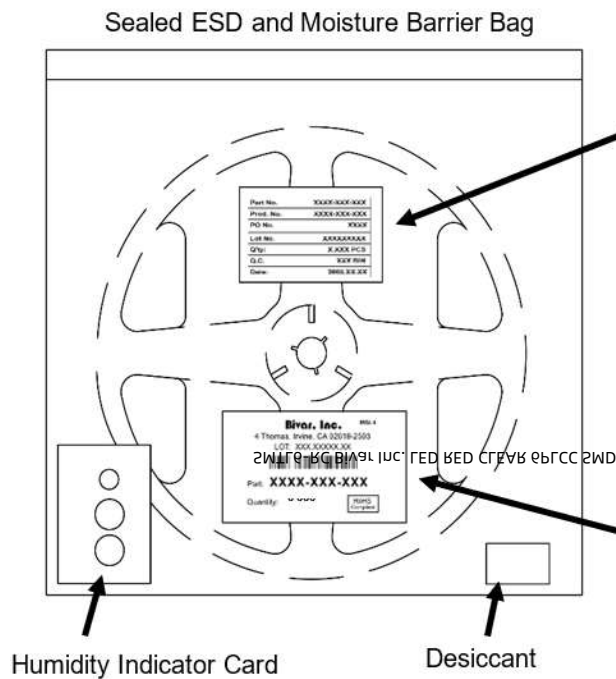

Part No.	XXXX-XXX-XXXX
PO No.	XXXX
Lot No.	XXXXXXXXXX
Q'ty:	XXXX PCS
Q.C.	
Date:	2025.XX.XX

### Internal Quality Control Label

		MSL: 4
(1P) Supplier Part #:	<b>SMTLXXXXYY</b>	
(Q) Quantity:	<b>XXXX</b>	Unit of Measure: EA
(10D) Date Code:	<b>XXXX</b>	
(1T) Lot Code:	<b>XXXXXXXXXX</b>	
(4L) Country of Origin:	<b>XX</b>	% Overage: 0 %
		Weight per 100 pcs. (g): 3
Additional Information: NA		
<b>BIVAR</b> 4 Thomas Irvine CA, 92618	<b>RoHS Compliant</b> Labeled By: JJE Printed on: 03/04/25 13:01	

Bivar reserves the right to make changes at any time without notice.

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.