

2N3725A PBFREE Datasheet



DiGi Electronics Part Number	2N3725A PBFREE-DG
Manufacturer	Central Semiconductor Corp
Manufacturer Product Number	2N3725A PBFREE
Description	TRANS NPN 50V 1.2A TO39
Detailed Description	Bipolar (BJT) Transistor NPN 50 V 1.2 A 300MHz 1 W Through Hole TO-39

<https://www.DiGi-Electronics.com>



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

2N3725A PBFREE

Series:

-

Transistor Type:

NPN

Voltage - Collector Emitter Breakdown (Max):

50 V

Current - Collector Cutoff (Max):

10 μ A

Power - Max:

1 W

Operating Temperature:

-65°C ~ 200°C (TJ)

Package / Case:

TO-205AD, TO-39-3 Metal Can

Manufacturer:

Central Semiconductor Corp

Product Status:

Obsolete

Current - Collector (Ic) (Max):

1.2 A

Vce Saturation (Max) @ Ib, Ic:

900mV @ 100mA, 1A

DC Current Gain (hFE) (Min) @ Ic, Vce:

60 @ 100mA, 1V

Frequency - Transition:

300MHz

Mounting Type:

Through Hole

Supplier Device Package:

TO-39

Environmental & Export classification

ECCN:

EAR99

HTSUS:

8541.29.0095

2N3724
2N3725
2N3725A

NPN SILICON TRANSISTOR



TO-39 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 2N3724, 2N3725, 2N3725A types are Silicon NPN Planar Epitaxial Transistors designed for high voltage, high current, high speed switching applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

Collector-Base Voltage
Collector-Emitter Voltage
Emitter-Base Voltage
Continuous Collector Current
Peak Collector Current
Power Dissipation
Power Dissipation ($T_C=25^\circ\text{C}$)
Operating and Storage Junction Temperature

SYMBOL	2N3724	2N3725	2N3725A	UNITS
V_{CBO}	50	80	80	V
V_{CEO}	30	50	50	V
V_{EBO}		6.0		V
I_C		1.2		A
I_{CM}		1.75		A
P_D	0.8	0.8	1.0	W
P_D	3.5	3.5	5.0	W
T_J, T_{stg}		-65 to +200		$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	2N3724		2N3725		2N3725A		UNITS
		MIN	MAX	MIN	MAX	MIN	MAX	
I_B	$V_{CE}=50\text{V}$	-	10	-	-	-	-	μA
I_B	$V_{CE}=80\text{V}$	-	-	-	10	-	10	μA
I_{CBO}	$V_{CB}=40\text{V}$	-	1.7	-	-	-	-	μA
I_{CBO}	$V_{CB}=40\text{V}, T_A=100^\circ\text{C}$	-	120	-	-	-	-	μA
I_{CBO}	$V_{CB}=60\text{V}$	-	-	-	1.7	-	0.5	μA
I_{CBO}	$V_{CB}=60\text{V}, T_A=100^\circ\text{C}$	-	-	-	120	-	50	μA
I_{CES}	$V_{CE}=50\text{V}$	-	10	-	-	-	-	μA
I_{CES}	$V_{CE}=80\text{V}$	-	-	-	10	-	10	μA
BV_{CBO}	$I_C=10\mu\text{A}$	50	-	80	-	80	-	V
BV_{CES}	$I_C=10\mu\text{A}$	50	-	80	-	80	-	V
BV_{CEO}	$I_C=10\text{mA}$	30	-	50	-	50	-	V
BV_{EBO}	$I_E=10\mu\text{A}$	6.0	-	6.0	-	6.0	-	V
$V_{CE(SAT)}$	$I_C=10\text{mA}, I_B=1.0\text{mA}$	-	0.25	-	0.25	-	0.25	V
$V_{CE(SAT)}$	$I_C=100\text{mA}, I_B=10\text{mA}$	-	0.20	-	0.26	-	0.26	V
$V_{CE(SAT)}$	$I_C=300\text{mA}, I_B=30\text{mA}$	-	0.32	-	0.40	-	0.40	V
$V_{CE(SAT)}$	$I_C=500\text{mA}, I_B=50\text{mA}$	-	0.42	-	0.52	-	0.52	V
$V_{CE(SAT)}$	$I_C=800\text{mA}, I_B=80\text{mA}$	-	0.65	-	0.80	-	0.80	V
$V_{CE(SAT)}$	$I_C=1.0\text{A}, I_B=100\text{mA}$	-	0.75	-	0.95	-	0.90	V
$V_{BE(SAT)}$	$I_C=10\text{mA}, I_B=1.0\text{mA}$	-	0.76	-	0.76	-	0.76	V
$V_{BE(SAT)}$	$I_C=100\text{mA}, I_B=10\text{mA}$	-	0.86	-	0.86	-	0.86	V
$V_{BE(SAT)}$	$I_C=300\text{mA}, I_B=30\text{mA}$	-	1.1	-	1.1	-	1.0	V
$V_{BE(SAT)}$	$I_C=500\text{mA}, I_B=50\text{mA}$	0.80	1.1	0.80	1.1	0.80	1.1	V
$V_{BE(SAT)}$	$I_C=800\text{mA}, I_B=80\text{mA}$	-	1.5	-	1.5	-	1.3	V
$V_{BE(SAT)}$	$I_C=1.0\text{A}, I_B=100\text{mA}$	-	1.7	-	1.7	0.90	1.4	V

R1 (5-December 2010)




2N3724
2N3725
2N3725A

NPN SILICON TRANSISTOR

ELECTRICAL CHARACTERISTICS - Continued: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	2N3724		2N3725		2N3725A		UNITS
		MIN	MAX	MIN	MAX	MIN	MAX	
h_{FE}	$V_{CE}=1.0\text{V}$, $I_C=10\text{mA}$	30	-	30	-	30	-	
h_{FE}	$V_{CE}=1.0\text{V}$, $I_C=100\text{mA}$	60	150	60	150	60	150	
h_{FE}	$V_{CE}=1.0\text{V}$, $I_C=300\text{mA}$	40	-	40	-	40	-	
h_{FE}	$V_{CE}=1.0\text{V}$, $I_C=500\text{mA}$	35	-	35	-	35	-	
h_{FE}	$V_{CE}=2.0\text{V}$, $I_C=800\text{mA}$	25	-	20	-	25	-	
h_{FE}	$V_{CE}=5.0\text{V}$, $I_C=1.0\text{A}$	30	-	25	-	25	-	
h_{FE}	$V_{CE}=5.0\text{V}$, $I_C=1.5\text{A}$	-	-	-	-	20	-	
f_T	$V_{CE}=10\text{V}$, $I_C=50\text{mA}$, $f=100\text{MHz}$	300	-	300	-	300	-	MHz
C_{ob}	$V_{CB}=10\text{V}$, $I_E=0$, $f=1.0\text{MHz}$	-	12	-	10	-	10	pF
C_{ib}	$V_{EB}=0.5\text{V}$, $I_C=0$, $f=1.0\text{MHz}$	-	55	-	55	-	55	pF
t_d	$V_{CC}=30\text{V}$, $I_C=500\text{mA}$, $I_{B1}=50\text{mA}$	-	10	-	10	-	10	ns
t_r	$V_{CC}=30\text{V}$, $I_C=500\text{mA}$, $I_{B1}=50\text{mA}$	-	30	-	30	-	30	ns
t_{on}	$V_{CC}=30\text{V}$, $I_C=500\text{mA}$, $I_{B1}=50\text{mA}$	-	35	-	35	-	35	ns
t_s	$V_{CC}=30\text{V}$, $I_C=500\text{mA}$, $I_{B1}=I_{B2}=50\text{mA}$	-	50	-	50	-	50	ns
t_f	$V_{CC}=30\text{V}$, $I_C=500\text{mA}$, $I_{B1}=I_{B2}=50\text{mA}$	-	25	-	25	-	25	ns
t_{off}	$V_{CC}=30\text{V}$, $I_C=500\text{mA}$, $I_{B1}=I_{B2}=50\text{mA}$	-	60	-	60	-	60	ns
t_{on}	$V_{CC}=30\text{V}$, $I_C=1.0\text{A}$, $I_{B1}=I_{B2}=100\text{mA}$	-	-	-	-	-	50	ns
t_{off}	$V_{CC}=30\text{V}$, $I_C=1.0\text{A}$, $I_{B1}=I_{B2}=100\text{mA}$	-	-	-	-	-	50	ns

TO-39 CASE - MECHANICAL OUTLINE

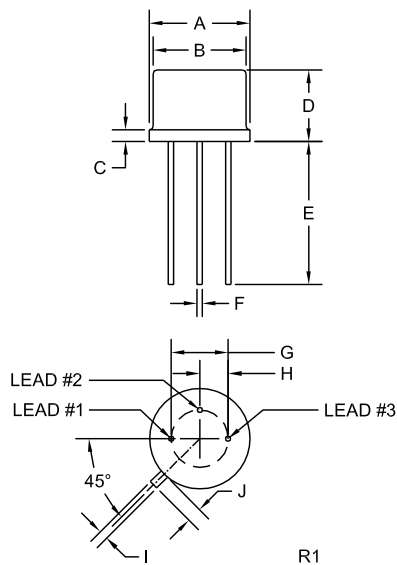

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.335	0.370	8.51	9.40
B (DIA)	0.315	0.335	8.00	8.51
C	-	0.040	-	1.02
D	0.240	0.260	6.10	6.60
E	0.500	-	12.70	-
F (DIA)	0.016	0.021	0.41	0.53
G (DIA)	0.200		5.08	
H	0.100		2.54	
I	0.028	0.034	0.71	0.86
J	0.029	0.045	0.74	1.14

TO-39 (REV: R1)

LEAD CODE:

- 1) Emitter
- 2) Base
- 3) Collector

MARKING:

FULL PART NUMBER

R1 (5-December 2010)



OUTSTANDING SUPPORT AND SUPERIOR SERVICES

PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
 145 Adams Avenue
 Hauppauge, NY 11788 USA
 Main Tel: (631) 435-1110
 Main Fax: (631) 435-1824
 Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms

Product End of Life Notification

PDN ID:	PDN01166
Notification Date:	3/11/21
Last Buy Date:	9/11/21
Last Shipment Date	3/11/22

Summary: The CP337V wafer process is discontinued and now classified as End of Life (EOL).

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by other manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's ongoing Product Management Process. Any replacement products are noted below. The effective date for placing last purchase orders will be six (6) months from the date of this notice and twelve (12) months from the notice date for final shipments, and minimum order quantities may apply. The last purchase and shipment dates may be extended if inventory is available.

*** All Plating types (PBFREE, TIN/LEAD) for each item listed are included in this notice.**

<u>Central Part Number</u>	<u>Replacement</u>
CP337V-2N3725-CT	N/A
CP337V-2N3725-CT20	N/A
CP337V-2N4013-CT20	N/A
MPQ3725	N/A
MPQ3725A	N/A
2N3725	N/A
2N3725A	N/A
2N4013	N/A
2N4014	N/A

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. Please email your requests to engineering@centrasemi.com.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.