

CT1008LDLSF-3R3J Datasheet

www.digi-electronics.com



DiGi Electronics Part Number	CT1008LDLSF-3R3J-DG
Manufacturer	Central Technologies
Manufacturer Product Number	CT1008LDLSF-3R3J
Description	SMD FER CORE WIRE-WOUND INDUCTOR
Detailed Description	3.3 μ H Wirewound Inductor 210mOhm

<https://www.DiGi-Electronics.com>



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

CT1008LDLSF-3R3J

Series:

ct1008ldlsf

Type:

Wirewound

Tolerance:

±5%

Frequency - Self Resonant:

54MHz

Mounting Type:

Surface Mount

Manufacturer:

Central Technologies

Product Status:

Active

Inductance:

3.3 μ H

DC Resistance (DCR):

210mOhm

Operating Temperature:

-25°C ~ 105°C

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH info available upon request


Moisture Sensitivity Level (MSL):

Vendor Undefined

Wire-wound Chip Inductors - Open

CT1008LDLSF Series

From 0.9 μ H to 10 μ H

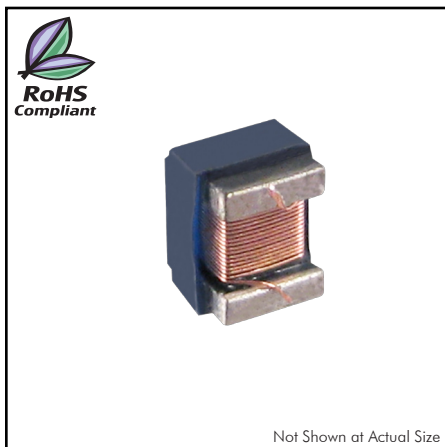

CHARACTERISTICS

Description: SMD ferrite core wire-wound chip inductor. Low DC resistance.

Applications: LC resonant circuits such as oscillator and signal generators, impedance matching, circuit isolation, RF filters, disk drives and computer peripherals, audio and video equipment, TV, radio and telecommunication equipment.

Operating Temperature: -25°C to 105°C (including self-temperature rise)

IDC: For inductance drop 10% from its value with current.

Irms: For a 40°C temperature rise from 25°C ambient with current.

Inductance Tolerance: $\pm 5\%$ & $\pm 10\%$

Testing: Inductance and Q are tested on an Agilent E4991A/HP4287A+16197A

Packaging: Tape & Reel.

Miscellaneous: RoHS Compliant.

Additional Information: Additional electrical & physical information available upon request

Samples available. See website for ordering information.


SPECIFICATIONS

Please specify tolerance code when ordering.
CT1008LDLSF-1R3_ ← J = $\pm 5\%$, K = $\pm 10\%$


Part Number	Ind. (μ H)	Test Freq. (MHz)	Q Fact. Typ.	SRF Min. (MHz)	DCR Max. (Ω)	IDC Typ. (mA)	Irms Max. (mA)	Tol. (%)
CT1008LDLSF-R90K	0.9	2.5	25	300	0.1	1400	1300	10
CT1008LDLSF-1R1K	1.1	2.5	24	275	0.105	1300	1200	10
CT1008LDLSF-1R3_	1.3	2.5	24	220	0.11	1200	1100	5 / 10
CT1008LDLSF-1R5_	1.5	2.5	22	210	0.125	1100	1000	5 / 10
CT1008LDLSF-1R9_	1.9	2.5	22	165	0.14	1000	1000	5 / 10
CT1008LDLSF-2R2_	2.2	2.5	21	75	0.155	950	950	5 / 10
CT1008LDLSF-2R7_	2.7	2.5	22	57	0.19	800	900	5 / 10
CT1008LDLSF-3R3_	3.3	2.5	21	54	0.21	750	800	5 / 10
CT1008LDLSF-3R9_	3.9	2.5	21	50	0.22	700	800	5 / 10
CT1008LDLSF-4R7_	4.7	2.5	27	48	0.435	700	650	5 / 10
CT1008LDLSF-5R8_	5.8	2.5	21	33	0.28	550	750	5 / 10
CT1008LDLSF-6R8_	6.8	2.5	20	28	0.315	500	700	5 / 10
CT1008LDLSF-8R2_	8.2	2.5	20	24	0.395	500	650	5 / 10
CT1008LDLSF-100_	10	2.5	22	20	0.48	450	550	5 / 10

PHYSICAL DIMENSIONS

Size	A Max.	B Max.	C Max.	D	E	F	G
mm	2.99	2.50	2.20	2.03	0.51	1.52	0.70
inches	0.118	0.098	0.087	0.080	0.020	0.060	0.028

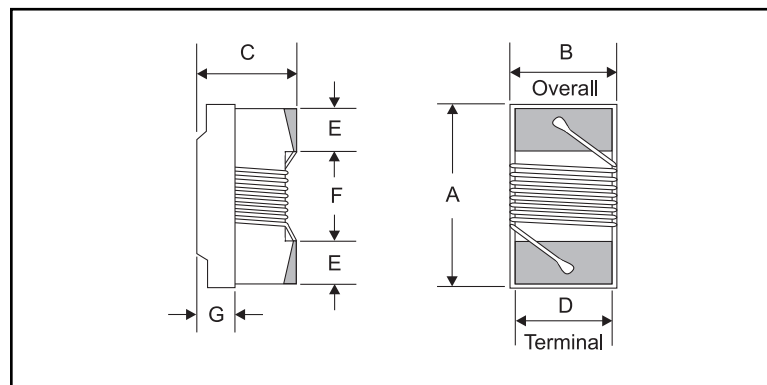

PAD LAYOUT

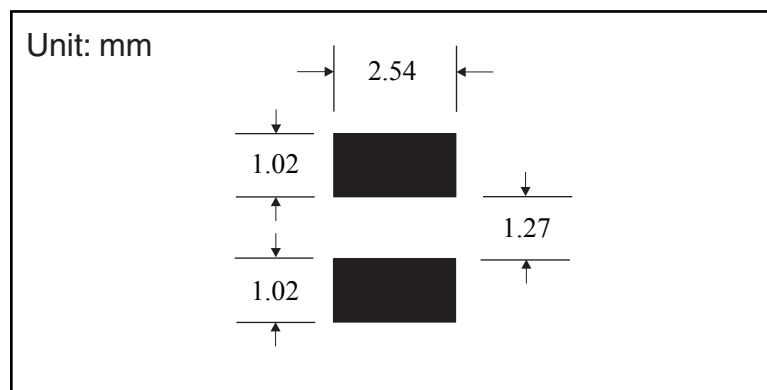

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we strictly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.