


CT187LYF-822J Datasheet

www.digi-electronics.com



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	CT187LYF-822J-DG
Manufacturer	Central Technologies
Manufacturer Product Number	CT187LYF-822J
Description	RAD LEADED FIXED SHLDED INDUCTOR
Detailed Description	8.2 mH Inductor 26Ohm



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

CT187LYF-822J

Series:

ct187lyf

Inductance:

8.2 mH

DC Resistance (DCR):

260hm

Operating Temperature:

-55°C ~ 125°C

Manufacturer:

Central Technologies

Product Status:

Active

Tolerance:

±5%

Frequency - Self Resonant:

500kHz

Mounting Type:

Through Hole

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH info available upon request

HTSUS:

8504.50.8000

Moisture Sensitivity Level (MSL):

Vendor Undefined

ECCN:


EAR99

Peaking Coils - Radial

CT187LYF

Series

From 100 μ H to 33,000 μ H

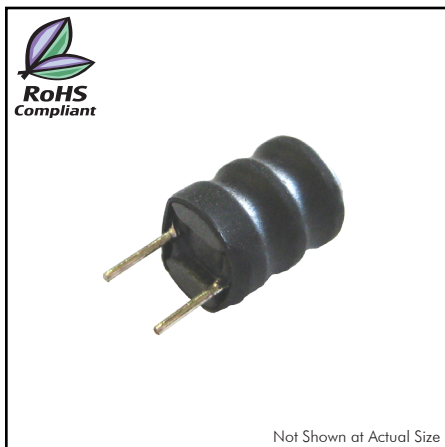

SPECIFICATIONS

Please specify tolerance code when ordering.

CT187LYF-101_ ← J = \pm 5%, K = \pm 10%

Part Number	Inductance (μ H)	L Test Freq. (kHz)	Q Fact. Min.	Q Test Freq. (kHz)	SRF Min. (MHz)	DCR Max. (Ω)	Rated DC (mA)
CT187LYF-101_	100	796	80	796	5.3	2.0	200
CT187LYF-121_	120	796	80	796	4.5	2.0	200
CT187LYF-151_	150	796	80	796	3.8	2.0	200
CT187LYF-181_	180	796	80	796	3.3	3.0	200
CT187LYF-221_	220	796	80	796	2.9	3.0	200
CT187LYF-271_	270	796	80	796	2.6	3.0	200
CT187LYF-331_	330	796	80	796	2.3	4.0	200
CT187LYF-391_	390	796	80	796	2.1	4.0	200
CT187LYF-471_	470	796	80	796	1.9	4.0	200
CT187LYF-561_	560	796	80	796	1.7	4.0	200
CT187LYF-681_	680	796	80	796	1.6	4.0	200
CT187LYF-821_	820	796	80	796	1.4	6.0	200
CT187LYF-102_	1000	252	90	252	1.3	6.0	150
CT187LYF-122_	1200	252	90	252	1.2	9.0	150
CT187LYF-152_	1500	252	90	252	1.1	9.0	150
CT187LYF-182_	1800	252	90	252	1.0	9.0	100
CT187LYF-222_	2200	252	90	252	.90	13	100
CT187LYF-272_	2700	252	90	252	.80	13	100
CT187LYF-332_	3300	252	90	252	.70	13	100
CT187LYF-392_	3900	252	90	252	.70	13	50
CT187LYF-472_	4700	252	90	252	.60	18	50
CT187LYF-562_	5600	252	90	252	.60	18	50
CT187LYF-682_	6800	252	90	252	.50	26	50
CT187LYF-822_	8200	252	90	252	.50	26	50
CT187LYF-103_	10000	79.6	100	79.6	.40	40	40
CT187LYF-123_	12000	79.6	100	79.6	.40	40	40
CT187LYF-153_	15000	79.6	100	79.6	.40	60	40
CT187LYF-183_	18000	79.6	100	79.6	.30	60	30
CT187LYF-223_	22000	79.6	100	79.6	.30	80	30
CT187LYF-273_	27000	79.6	100	79.6	.30	80	30
CT187LYF-333_	33000	79.6	100	79.6	.30	80	30

CHARACTERISTICS

Description: Radial leaded fixed inductor (UL sleeved)

Applications: Ideal as a choke coil for noise filtering

Operating Temperature: -55°C to +125°C

Inductance Tolerance: \pm 5%, \pm 10%

Testing: Inductance and Q are tested on an HP4285A at specified frequency

Packaging: Bulk pack

Marking: UL sleeving marked with inductance code


Miscellaneous: RoHS Compliant

Additional Information: Additional electrical & physical information available upon request

Samples available. See website for ordering information

PHYSICAL DIMENSIONS

Size	A	B	C	D	22 AWG
	Max.	Max.	Nom.	Nom.	Nom.
mm	11.2	8.3	5	5	0.643
inches	0.44	0.33	0.2	0.2	0.03

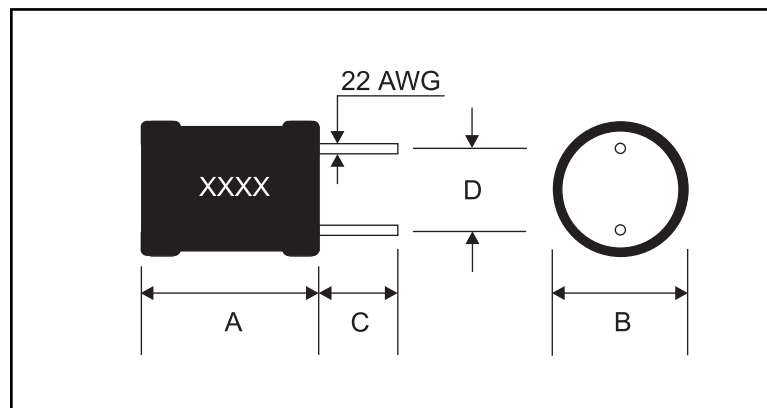

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.