

CPEA2622L-150MC Datasheet

www.digi-electronics.com



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	CPEA2622L-150MC-DG
Manufacturer	CODACA
Manufacturer Product Number	CPEA2622L-150MC
Description	HIGH CURRENT POWER INDUCTOR
Detailed Description	15 μ H Shielded Wirewound Inductor 34 A 2.32mOhm Max Vertical, 2 PC Pin Flat Wire, High Frequency, Low Loss, Soft Saturation



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

CPEA2622L-150MC

Series:

CPEA2622L

Type:

Wirewound

Inductance:15 μ H**Current Rating (Amps):**

34 A

Shielding:

Shielded

Q @ Freq:

-

Ratings:

-

Inductance Frequency - Test:

100 kHz

Mounting Type:

Through Hole

Supplier Device Package:

Vertical, 2 PC Pin

Height - Seated (Max):

0.984" (25.00mm)

Manufacturer:

CODACA

Product Status:

Active

Material - Core:

Metal Composite

Tolerance: \pm 20%**Current - Saturation (Isat):**

24A

DC Resistance (DCR):

2.32mOhm Max

Frequency - Self Resonant:

-

Operating Temperature:

-55°C ~ 150°C

Features:

Flat Wire, High Frequency, Low Loss, Soft Saturation

Package / Case:

Vertical, 2 PC Pin

Size / Dimension:

1.043" L x 0.874" W (26.50mm x 22.20mm)

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8504.50.8000

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99



High Current Power Inductor

CPEA2622L Series



Outline:


- Low loss, small magnetostriction coefficient result in low noise.
- Flat wire winding, achieving very low DC resistance.
- Excellent temperature stability, less affected by temperature.
- Magnetically shielded structure, excellent resistance to electromagnetic interference.
- Suitable for high-power DC-DC converter applications.

Features:


- Core material: Composite.
- Environmental: RoHS compliant, halogen free
- Weight: 59.9 g
- Moisture Sensitivity: Level (MSL) 1
(Unlimited floor life at <30°C / 85% relative humidity)
- Operating temperature range: -55°C~+155°C
(Including coil's temperature rise).
- Storage temperature range: -55°C~+155°C

Application:

- PV inverter/Industrial control/New energy
- DC /DC converters/Motherboards/Filter
- High current switching regulators




1 Product Dimensions (mm)

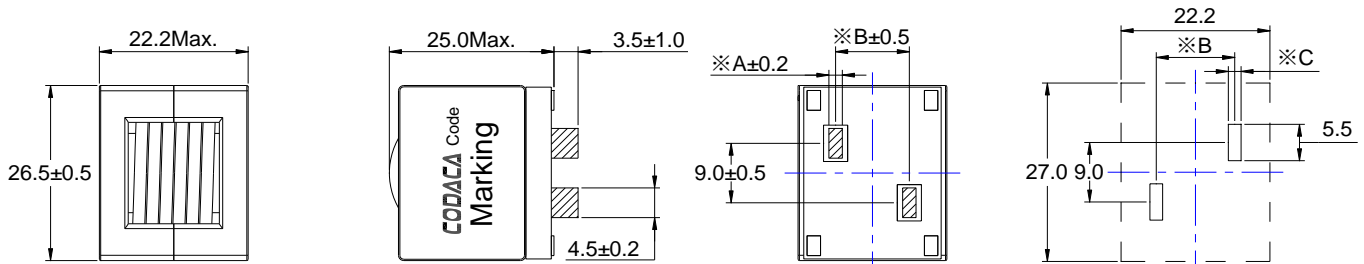

Inductance	2.20μH	3.60μH	5.50μH	7.50μH	10.0μH	12.0μH	15.0μH	22.0μH
A(mm)	2.50	2.00	1.80	1.60	1.30	1.30	1.10	0.90
B(mm)	10.8	11.0	12.4	12.6	11.8	12.9	12.6	11.7
C(mm)	3.50	3.00	2.80	2.60	2.30	2.30	2.10	1.90

Reference Hole Pattern



Schematic

※ Date code will be changed by manufacture date.

2 Electrical Characteristics

Part No.	Inductance (μH)※1 ±20%	D.C.R. (mΩ)		Isat (A)※2 Typical	Irms (A)※3 Typical
		Typical	Max.		
CPEA2622L-2R2MC	2.20	0.36	0.43	73.0	79.0
CPEA2622L-3R6MC	3.60	0.53	0.64	58.0	65.0
CPEA2622L-5R5MC	5.50	0.70	0.84	40.0	56.0
CPEA2622L-7R5MC	7.50	0.96	1.15	34.0	48.0
CPEA2622L-100MC	10.0	1.34	1.61	29.0	41.0
CPEA2622L-120MC	12.0	1.51	1.81	27.0	39.0
CPEA2622L-150MC	15.0	1.93	2.32	24.0	34.0
CPEA2622L-220MC	22.0	2.90	3.48	19.0	28.0

All data is tested on 25°C ambient temperature

1. Inductance measure condition at 100kHz, 0.1V.
2. Isat: the actual value of DC current when the Inductance decrease 30% of its initial Value.
3. Irms: The actual value of DC current when the Temperature rise is ΔT50°C (Ta=25°C)









3 How to Order





High Current Power Inductor CPEA2622L Series









4 Saturation Current vs Temperature Rise Current Curve

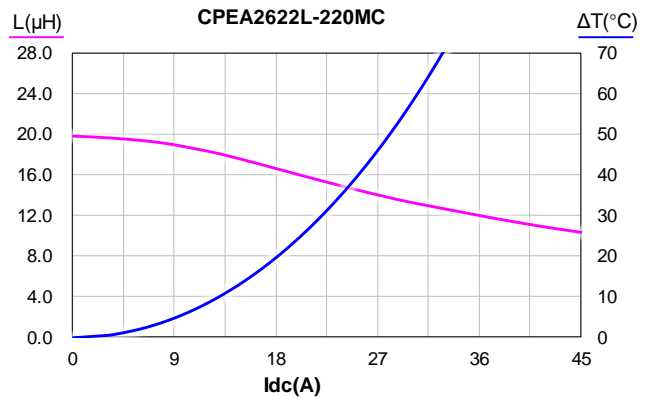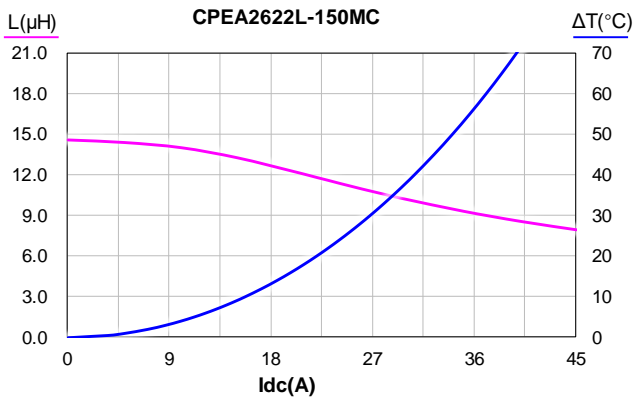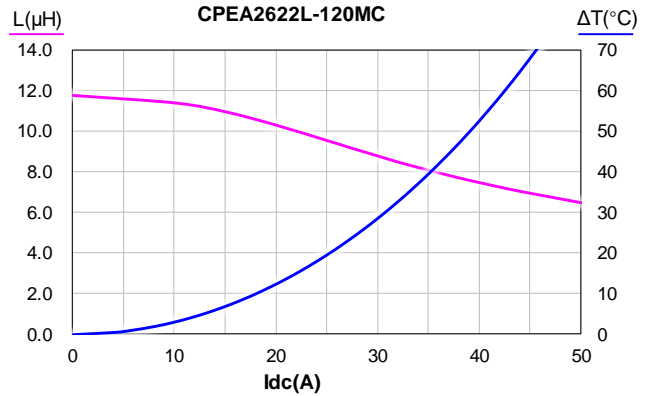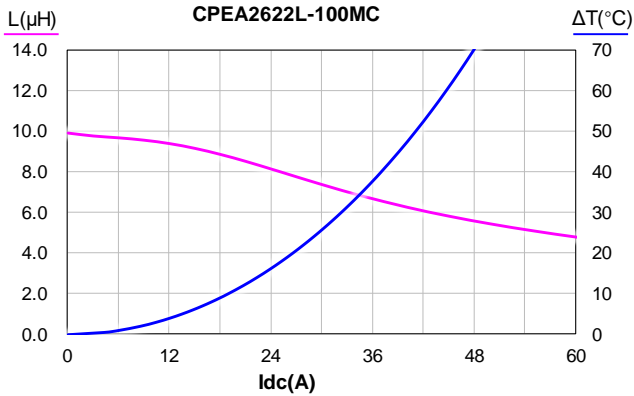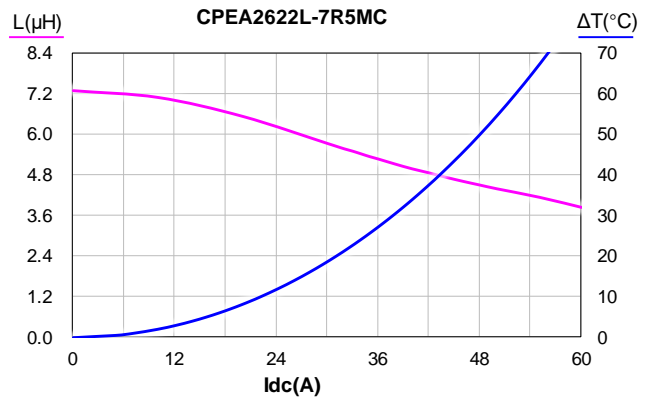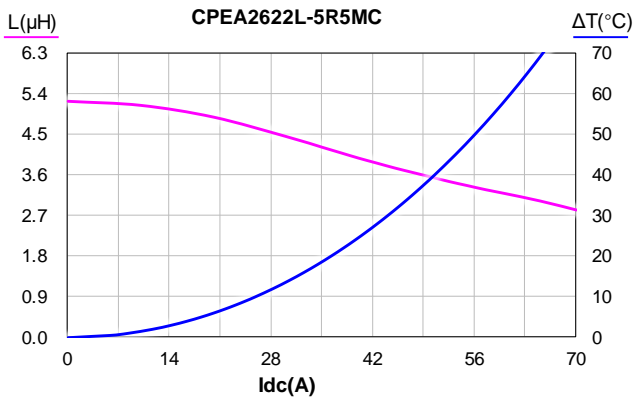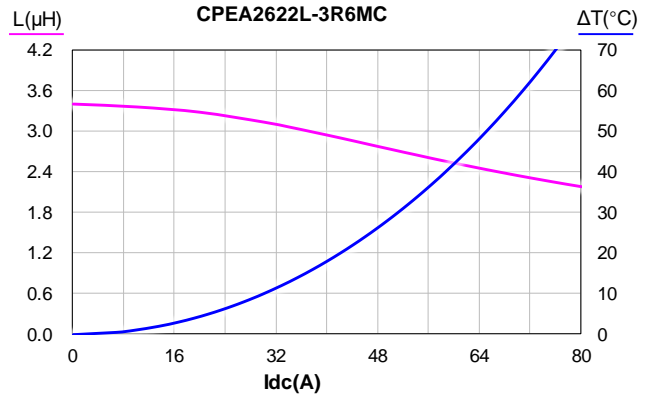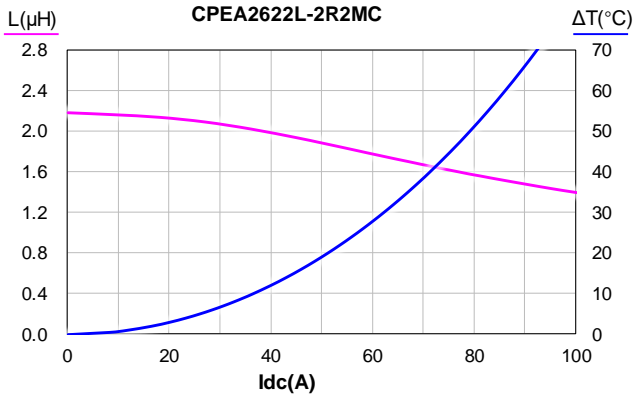



High Current Power Inductor CPEA2622L Series









5 L vs Frequency

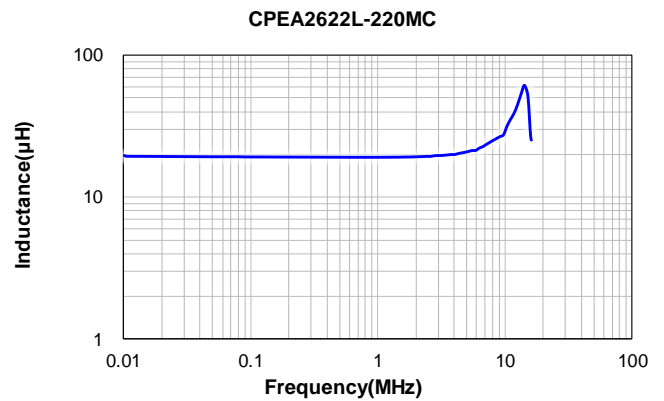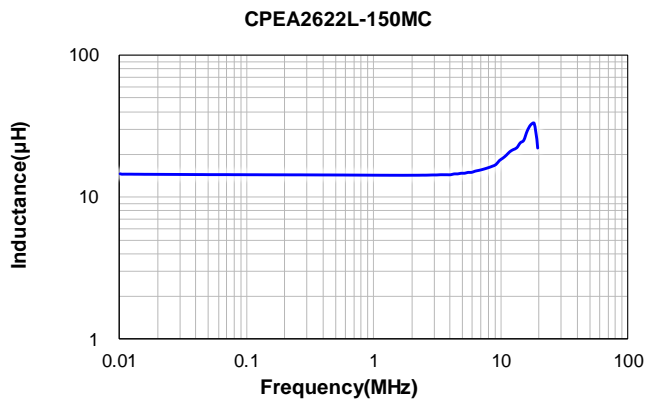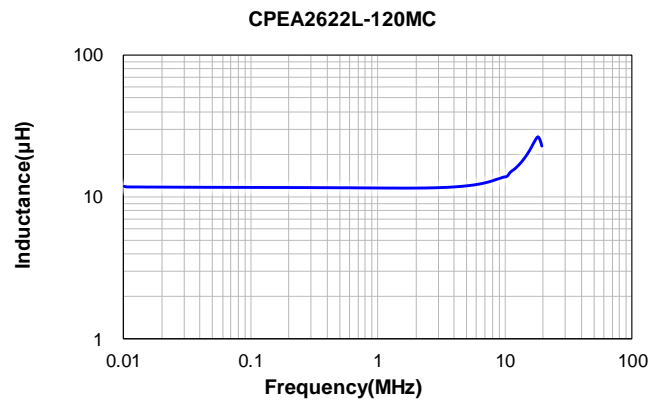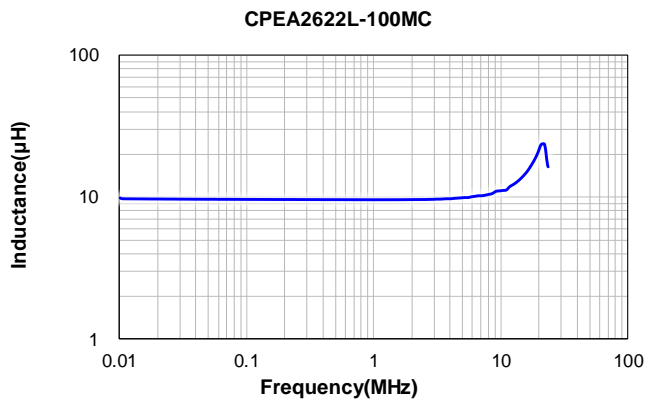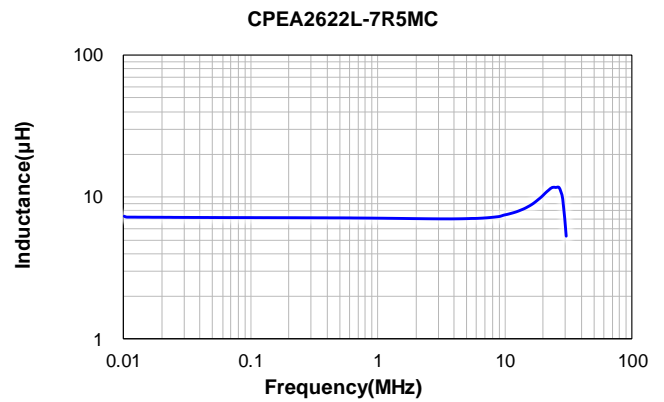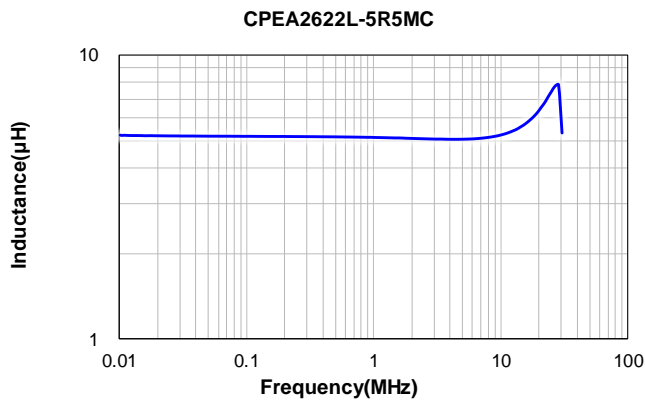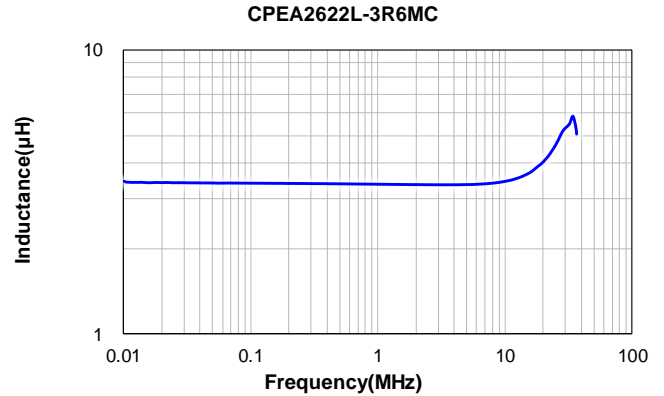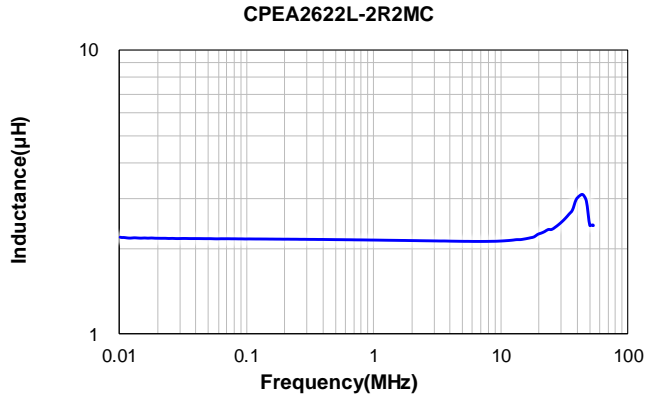




High Current Power Inductor CPEA2622L Series

6 Impedance vs Frequency

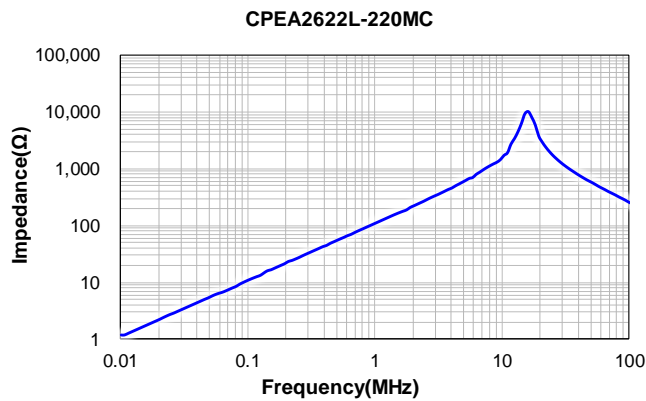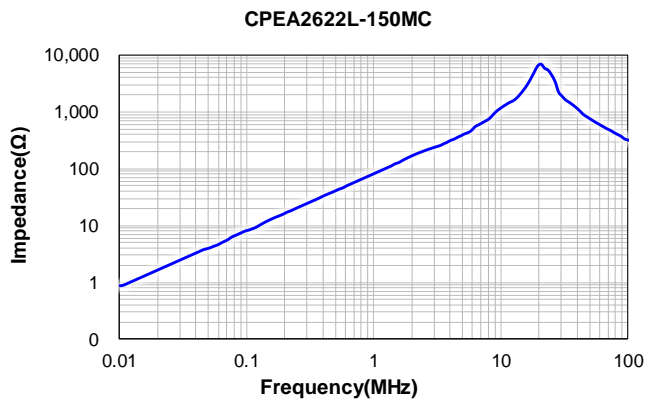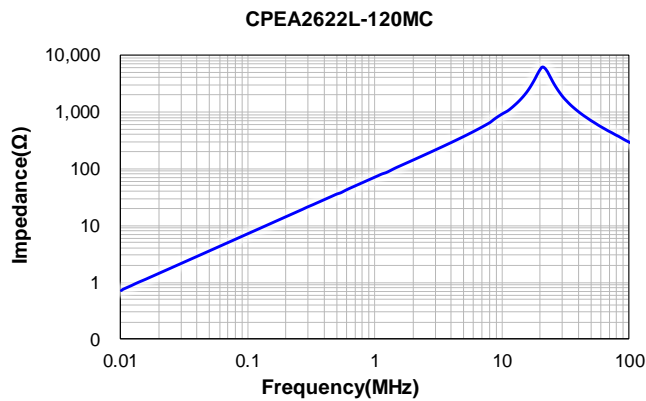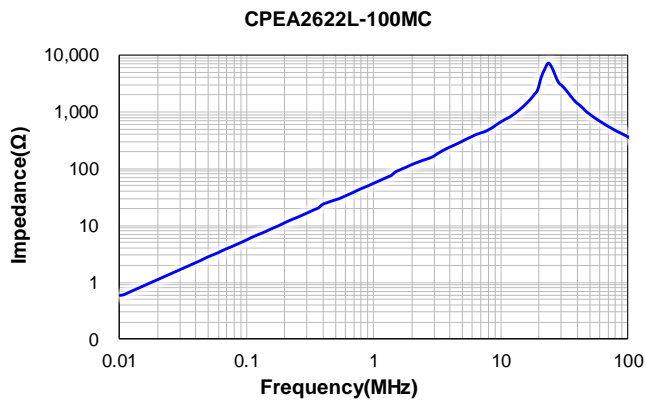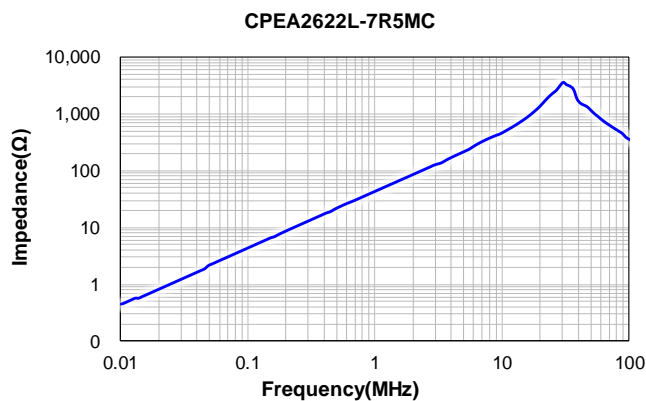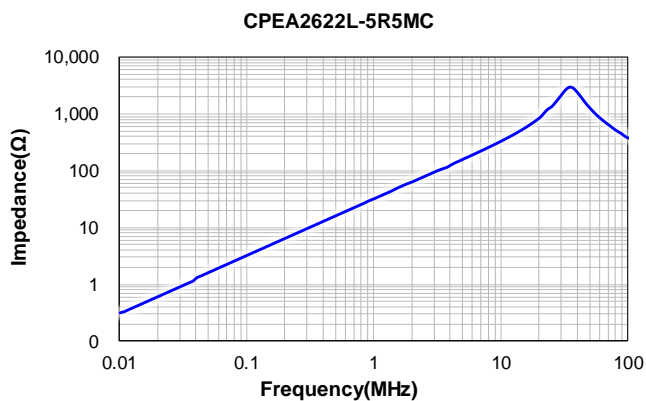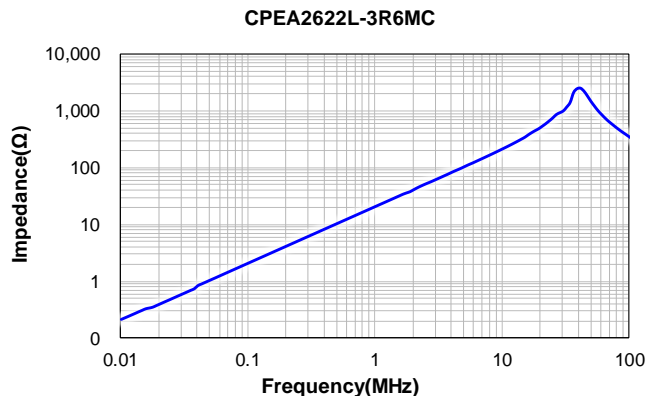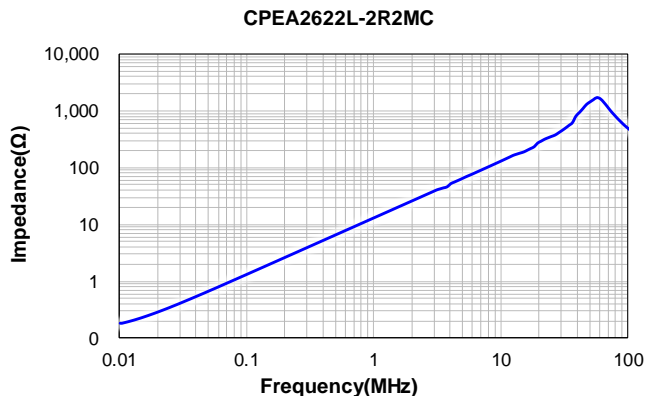

7 Packing Specification


7.1 Plastic Tray Dimensions (mm)

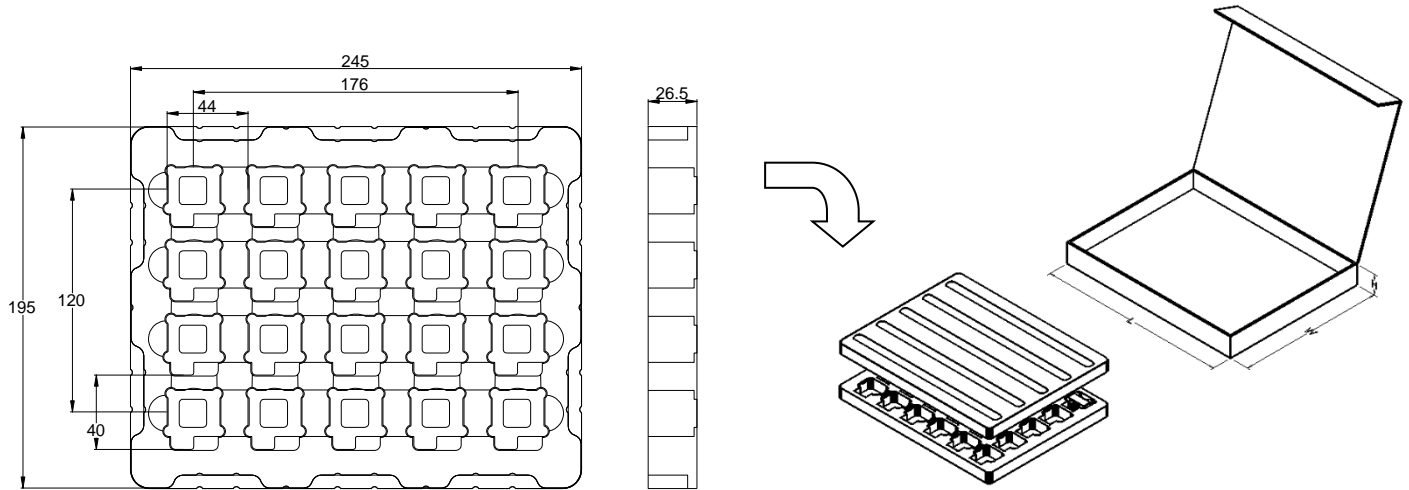

Packaging Unit (Pcs)	Material
20	APET

L typ	W typ	H typ	No. of Tray (Pcs)	Packaging Unit(Pcs)	Material
265	205	34	1	20	Paper

7.2 Packing(mm)

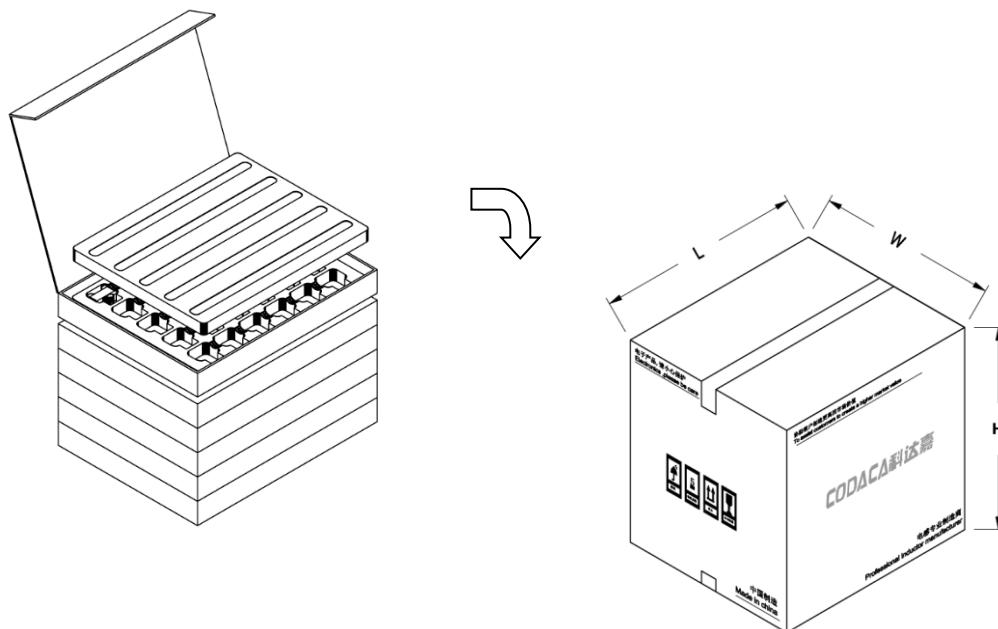

L typ	W typ	H typ	No. of Inner Carton	Packaging Unit(Pcs)	Material
275	232	261	6	120	Paper

8 Notice of Use

- 8.1 Special remind:Circuit design, component placement, PCB size and thickness, cooling system and etc. all will affect the product temperature. Please verify the product temperature in the final application.
- 8.2 Product in packing storage condition:temperature 5~40°C, RH≤70%.
If taking out for use, the remaining products should be sealed in plastic bags and preserved in accordance with the above conditions, to avoid oxidation of terminals (electrodes), affecting soldering status.
- 8.3 A storage of Codaca Electronic products for longer than 12 months is not recommended, Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- 8.4 Do not keep products in unsuitable storage conditions, such as areas susceptible to high temperatures, high humidity, dust or corrosion.
- 8.5 Always handle products with care.
- 8.6 Don't touch electrodes directly with bare hands as oil secretions may inhibit soldering.
Always ensure optimum conditions for soldering.
- 8.7 When this product will be used on a similar or new project to the original one,
sometimes it might be unable to satisfy the specifications due to different condition of usage.
- 8.8 This inductor itself does not have any protective function in abnormal condition, such as overload, short-circuit, open-circuit conditions, etc. Therefore, it shall be confirmed that there is no risk of smoke, fire, dielectric withstand voltage, insulation resistance, etc., or use in abnormal conditions protective devices or protection circuit in the end product.
- 8.9 Hi-Pot test with higher voltage than spec value will damage insulating material and shorten its life.
- 8.10 If using in potting compound, the magnet wire coating might be damaged, please consult with us.
- 8.11 Refrain from rinsing coils. If necessary, please consult with us.
- * 8.12 Codaca Electronic products without "V" prefix are qualified for industrial product requirement , and with "V" prefix are qualified for AEC-Q200, but it doesn't mean that Codaca Electronic products can absolutely meet specific industry norms and quality test standards in automotive electronics or more strict application fields . Codaca Electronic will be exempted from being responsible for the consequences of using Codaca products in automotive electronic or higher application field related to safety when without being aware of it.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.