

CLP6B-WKW-CD0E0233 Datasheet

www.digi-electronics.com



<https://www.DiGi-Electronics.com>

| | |
|------------------------------|--|
| DiGi Electronics Part Number | CLP6B-WKW-CD0E0233-DG |
| Manufacturer | CreeLED, Inc. |
| Manufacturer Product Number | CLP6B-WKW-CD0E0233 |
| Description | LED COOL WHITE DIFF 6PLCC SMD |
| Detailed Description | White, Cool 6800K LED Indication - Discrete 3.8V 6-SMD, J-Lead |

This model CLP6B-WKW-CD0E0233 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

CLP6B-WKW-CD0E0233

Series:

CLP6B-WKW/MKW

Color:

White, Cool

Lens Color:

Yellow

Millicandela Rating:

14600mcd

Lens Size:

4.00mm Dia

Current - Test:

50mA

Mounting Type:

Surface Mount

Wavelength - Peak:

-

Package / Case:

6-SMD, J-Lead

Size / Dimension:

6.00mm L x 5.00mm W

Base Product Number:

CLP6B

Manufacturer:

CreeLED, Inc.

Product Status:

Active

Configuration:

Standard

Lens Transparency:

Diffused

Lens Style:

Round with Flat Top

Voltage - Forward (Vf) (Typ):

3.8V

Viewing Angle:

-

Wavelength - Dominant:

6800K

Features:

-

Supplier Device Package:

6-PLCC

Height (Max):

2.60mm

Environmental & Export classification

RoHS Status:

RoHS Compliant

REACH Status:

REACH Unaffected

HTSUS:

8541.41.0000


Moisture Sensitivity Level (MSL):

5A (24 Hours)

ECCN:

EAR99

CLP6B-WKW/MKW: PLCC6 3 IN 1 SMD LED

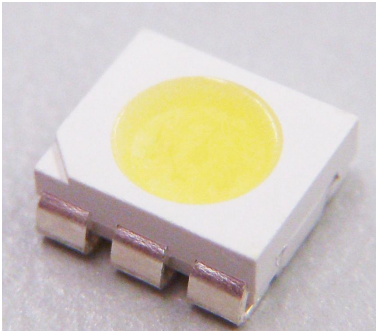

PRODUCT DESCRIPTION

These SMD LEDs are packaged in an industry-standard PLCC6 package. These high-reliability and high-brightness LEDs are designed to work in a wide range of environmental conditions and are ideally suited for use in illumination applications.

Their wide viewing angle makes these LEDs ideally suited for channel letters or general backlighting and illumination applications. The flat-top emitting surface makes it easy for these LEDs to mate with light pipes.

FEATURES

- Size (mm): 6.0 X 5.0
- Color Temperatures:
Cool White :
Min . (4600K) / Typical (6800K)
Warm White :
Min . (2500K) / Typical (3200K)
- Luminous Intensity (mcd)
CLP6B-WKW:(9000-22400)
CLP6B-MKW:(7100-22400)
- CRI:
Typical CRI for Cool White
(4600-15000k) is 72
Typical CRI for Warm White
(2500-4600k) is 80
- Lead - Free
- RoHS Compliant

APPLICATIONS

- Channel Letter
- Backlight

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$)

| Items | Symbol | Absolute Maximum Rating | Unit |
|--|------------|-------------------------|--------------------|
| Forward Current | I_F | 3 x 50 | mA |
| Peak Forward Current ^{Note 1} | I_{FP} | 3 x 100 | mA |
| Reverse Voltage | V_R | 5 | V |
| Power Dissipation | P_D | 3 x 220 | mW |
| Operation Temperature | T_{opr} | -40 ~ +100 | $^\circ\text{C}$ |
| Storage Temperature | T_{stg} | -40 ~ +100 | $^\circ\text{C}$ |
| Junction Temperature | T_J | 110 | $^\circ\text{C}$ |
| Junction/Ambient | R_{THJA} | 3 x 300 | $^\circ\text{C/W}$ |
| Junction/Solder Point | R_{THJS} | 3 x 160 | $^\circ\text{C/W}$ |

Note:

1. Pulse width ≤ 0.1 msec, duty $\leq 1/10$.

TYPICAL ELECTRICAL & OPTICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

| Characteristics | Color | Symbol | Condition | Unit | Minimum | Typical | Maximum |
|--------------------------|-----------|----------|------------------------|---------------|---------|---------|---------|
| Forward Voltage | Cool/Warm | V_F | $I_F = 50$ mA | V | | 3.8 | 4.4 |
| Reverse Current | Cool/Warm | I_R | $V_R = 5$ V | μA | | | 10 |
| Luminous Flux | Cool | Φ_V | $I_F = 3 \times 50$ mA | mlm | | 32000 | |
| | Warm | Φ_V | $I_F = 3 \times 50$ mA | mlm | | 30000 | |
| Luminous Intensity | Cool | I_V | $I_F = 3 \times 50$ mA | mcd | 9000 | 14000 | |
| | Warm | I_V | $I_F = 3 \times 50$ mA | mcd | 7100 | 12000 | |
| Chromaticity Coordinates | Cool | x | $I_F = 3 \times 50$ mA | | | 0.3100 | |
| | Warm | y | $I_F = 3 \times 50$ mA | | | 0.3200 | |

- * Continuous reverse voltage can cause LED damage.

INTENSITY BIN LIMIT

| Cool White (3 x 50 mA) - CLP6B-WKW | | | Warm White (3 x 50 mA) - CLP6B-MKW | | |
|------------------------------------|-----------|-----------|------------------------------------|-----------|-----------|
| Bin Code | Min.(mcd) | Max.(mcd) | Bin Code | Min.(mcd) | Max.(mcd) |
| C0 | 9000 | 11200 | B0 | 7100 | 9000 |
| D0 | 11200 | 14000 | C0 | 9000 | 11200 |
| E0 | 14000 | 18000 | D0 | 11200 | 14000 |
| F0 | 18000 | 22400 | E0 | 14000 | 18000 |
| | | | F0 | 18000 | 22400 |

* Tolerance of measurement of luminous intensity is $\pm 10\%$

VOLTAGE BIN LIMIT

| Cool White (50 mA) - CLP6B-WKW | | | Warm White (50 mA) - CLP6B-MKW | | |
|--------------------------------|----------|----------|--------------------------------|----------|----------|
| Bin Code | Min. (V) | Max. (V) | Bin Code | Min. (V) | Max. (V) |
| 29 | 3.2 | 3.4 | 29 | 3.2 | 3.4 |
| 2a | 3.4 | 3.6 | 2a | 3.4 | 3.6 |
| 2b | 3.6 | 3.8 | 2b | 3.6 | 3.8 |
| 2c | 3.8 | 4.0 | 2c | 3.8 | 4.0 |
| 2d | 4.0 | 4.2 | 2d | 4.0 | 4.2 |
| 2e | 4.2 | 4.4 | 2e | 4.2 | 4.4 |

* Tolerance of measurement of voltage is $\pm 0.05V$

COLOR BIN LIMIT

Cool White (3 X 50 mA) - CLP6B-WKW

| Bin Code | Sub-bin | x | y |
|----------|---------|--------|--------|
| W1 | Wa1 | 0.2449 | 0.2288 |
| | | 0.2497 | 0.2384 |
| | | 0.2543 | 0.2356 |
| | | 0.2497 | 0.2267 |
| | Wa2 | 0.2497 | 0.2267 |
| | | 0.2543 | 0.2356 |
| | | 0.2589 | 0.2328 |
| | | 0.2545 | 0.2245 |
| | Wa3 | 0.2497 | 0.2384 |
| | | 0.2545 | 0.2480 |
| | | 0.2589 | 0.2445 |
| | | 0.2543 | 0.2356 |
| | Wa4 | 0.2543 | 0.2356 |
| | | 0.2589 | 0.2445 |
| | | 0.2633 | 0.2410 |
| | | 0.2589 | 0.2328 |
| | Wb1 | 0.2545 | 0.2245 |
| | | 0.2589 | 0.2328 |
| | | 0.2635 | 0.2299 |
| | | 0.2593 | 0.2223 |
| | Wb2 | 0.2593 | 0.2223 |
| | | 0.2635 | 0.2299 |
| | | 0.2680 | 0.2270 |
| | | 0.2640 | 0.2200 |
| | Wb3 | 0.2589 | 0.2328 |
| | | 0.2633 | 0.2410 |
| | | 0.2677 | 0.2375 |
| | | 0.2635 | 0.2299 |
| Wb4 | 0.2635 | 0.2299 | |
| | 0.2677 | 0.2375 | |
| | 0.2720 | 0.2340 | |
| | 0.2680 | 0.2270 | |

| Bin Code | Sub-bin | x | y |
|----------|---------|--------|--------|
| W1 | Wc1 | 0.2545 | 0.2480 |
| | | 0.2593 | 0.2575 |
| | | 0.2635 | 0.2534 |
| | | 0.2589 | 0.2445 |
| | Wc2 | 0.2589 | 0.2445 |
| | | 0.2635 | 0.2534 |
| | | 0.2677 | 0.2493 |
| | | 0.2633 | 0.2410 |
| | Wc3 | 0.2593 | 0.2575 |
| | | 0.2640 | 0.2670 |
| | | 0.2680 | 0.2623 |
| | | 0.2635 | 0.2534 |
| | Wc4 | 0.2635 | 0.2534 |
| | | 0.2680 | 0.2623 |
| | | 0.2720 | 0.2575 |
| | | 0.2677 | 0.2493 |
| | Wd1 | 0.2633 | 0.2410 |
| | | 0.2677 | 0.2493 |
| | | 0.2718 | 0.2451 |
| | | 0.2677 | 0.2375 |
| | Wd2 | 0.2677 | 0.2375 |
| | | 0.2718 | 0.2451 |
| | | 0.2760 | 0.2410 |
| | | 0.2720 | 0.2340 |
| | Wd3 | 0.2677 | 0.2493 |
| | | 0.2720 | 0.2575 |
| | | 0.2760 | 0.2528 |
| | | 0.2718 | 0.2451 |
| Wd4 | 0.2718 | 0.2451 | |
| | 0.2760 | 0.2528 | |
| | 0.2800 | 0.2480 | |
| | 0.2760 | 0.2410 | |

| Bin Code | Sub-bin | x | y |
|----------|---------|--------|--------|
| W2 | We1 | 0.2640 | 0.2670 |
| | | 0.2688 | 0.2765 |
| | | 0.2726 | 0.2711 |
| | | 0.2680 | 0.2623 |
| | We2 | 0.2680 | 0.2623 |
| | | 0.2726 | 0.2711 |
| | | 0.2764 | 0.2658 |
| | | 0.2720 | 0.2575 |
| | We3 | 0.2688 | 0.2765 |
| | | 0.2735 | 0.2860 |
| | | 0.2772 | 0.2800 |
| | | 0.2726 | 0.2711 |
| | We4 | 0.2726 | 0.2711 |
| | | 0.2772 | 0.2800 |
| | | 0.2808 | 0.2740 |
| | | 0.2764 | 0.2658 |
| | Wf1 | 0.2720 | 0.2575 |
| | | 0.2764 | 0.2658 |
| | | 0.2802 | 0.2604 |
| | | 0.2760 | 0.2528 |
| | Wf2 | 0.2760 | 0.2528 |
| | | 0.2802 | 0.2604 |
| | | 0.2840 | 0.2550 |
| | | 0.2800 | 0.2480 |
| | Wf3 | 0.2764 | 0.2658 |
| | | 0.2808 | 0.2740 |
| | | 0.2844 | 0.2680 |
| | | 0.2802 | 0.2604 |
| Wf4 | 0.2802 | 0.2604 | |
| | 0.2844 | 0.2680 | |
| | 0.2880 | 0.2620 | |
| | 0.2840 | 0.2550 | |

* Tolerance of measurement of the color coordinates is ± 0.01

COLOR BIN LIMIT

Cool White (3 X 50 mA) - CLP6B-WKW

| Bin Code | Sub-bin | x | y |
|----------|---------|--------|--------|
| W2 | Wg1 | 0.2735 | 0.2860 |
| | | 0.2783 | 0.2955 |
| | | 0.2817 | 0.2889 |
| | | 0.2772 | 0.2800 |
| | Wg2 | 0.2772 | 0.2800 |
| | | 0.2817 | 0.2889 |
| | | 0.2852 | 0.2823 |
| | | 0.2808 | 0.2740 |
| | Wg3 | 0.2783 | 0.2955 |
| | | 0.2830 | 0.3050 |
| | | 0.2863 | 0.2978 |
| | | 0.2817 | 0.2889 |
| | Wg4 | 0.2817 | 0.2889 |
| | | 0.2863 | 0.2978 |
| | | 0.2895 | 0.2905 |
| | | 0.2852 | 0.2823 |
| | Wh1 | 0.2808 | 0.2740 |
| | | 0.2852 | 0.2823 |
| | | 0.2886 | 0.2756 |
| | | 0.2844 | 0.2680 |
| | Wh2 | 0.2844 | 0.2680 |
| | | 0.2886 | 0.2756 |
| | | 0.2920 | 0.2690 |
| | | 0.2880 | 0.2620 |
| | Wh3 | 0.2852 | 0.2823 |
| | | 0.2895 | 0.2905 |
| | | 0.2928 | 0.2833 |
| | | 0.2886 | 0.2756 |
| Wh4 | 0.2886 | 0.2756 | |
| | 0.2928 | 0.2833 | |
| | 0.2960 | 0.2760 | |
| | 0.2920 | 0.2690 | |

| Bin Code | Sub-bin | x | y |
|----------|---------|--------|--------|
| W3 | Wj1 | 0.2830 | 0.3050 |
| | | 0.2890 | 0.3130 |
| | | 0.2918 | 0.3048 |
| | | 0.2863 | 0.2978 |
| | Wj2 | 0.2863 | 0.2978 |
| | | 0.2918 | 0.3048 |
| | | 0.2947 | 0.2967 |
| | | 0.2895 | 0.2905 |
| | Wj3 | 0.2890 | 0.3130 |
| | | 0.2950 | 0.3210 |
| | | 0.2974 | 0.3119 |
| | | 0.2918 | 0.3048 |
| | Wj4 | 0.2918 | 0.3048 |
| | | 0.2974 | 0.3119 |
| | | 0.2998 | 0.3028 |
| | | 0.2947 | 0.2967 |
| | Wk1 | 0.2895 | 0.2905 |
| | | 0.2947 | 0.2967 |
| | | 0.2975 | 0.2890 |
| | | 0.2928 | 0.2833 |
| | Wk2 | 0.2928 | 0.2833 |
| | | 0.2975 | 0.2890 |
| | | 0.3003 | 0.2813 |
| | | 0.2960 | 0.2760 |
| | Wk3 | 0.2947 | 0.2967 |
| | | 0.2998 | 0.3028 |
| | | 0.3022 | 0.2946 |
| | | 0.2975 | 0.2890 |
| Wk4 | 0.2975 | 0.2890 | |
| | 0.3022 | 0.2946 | |
| | 0.3045 | 0.2865 | |
| | 0.3003 | 0.2813 | |

| Bin Code | Sub-bin | x | y |
|----------|---------|--------|--------|
| W3 | Wm1 | 0.2950 | 0.3210 |
| | | 0.3010 | 0.3290 |
| | | 0.3030 | 0.3190 |
| | | 0.2974 | 0.3119 |
| | Wm2 | 0.2974 | 0.3119 |
| | | 0.3030 | 0.3119 |
| | | 0.3050 | 0.3090 |
| | | 0.2998 | 0.3028 |
| | Wm3 | 0.3010 | 0.3290 |
| | | 0.3070 | 0.3370 |
| | | 0.3085 | 0.3260 |
| | | 0.3030 | 0.3190 |
| | Wm4 | 0.3030 | 0.3190 |
| | | 0.3085 | 0.3260 |
| | | 0.3100 | 0.3150 |
| | | 0.3050 | 0.3090 |
| | Wn1 | 0.2998 | 0.3028 |
| | | 0.3050 | 0.3090 |
| | | 0.3070 | 0.3005 |
| | | 0.3022 | 0.2946 |
| | Wn2 | 0.3022 | 0.2946 |
| | | 0.3070 | 0.3005 |
| | | 0.3090 | 0.2920 |
| | | 0.3045 | 0.2865 |
| | Wn3 | 0.3050 | 0.3090 |
| | | 0.3100 | 0.3150 |
| | | 0.3115 | 0.3060 |
| | | 0.3070 | 0.3005 |
| Wn4 | 0.3070 | 0.3005 | |
| | 0.3115 | 0.3060 | |
| | 0.3130 | 0.2970 | |
| | 0.3090 | 0.2920 | |

* Tolerance of measurement of the color coordinates is ± 0.01

COLOR BIN LIMIT

Cool White (3 X 50 mA) - CLP6B-WKW

| Bin Code | Sub-bin | x | y |
|----------|---------|--------|--------|
| W4 | Wp1 | 0.3070 | 0.3370 |
| | | 0.3130 | 0.3430 |
| | | 0.3140 | 0.3320 |
| | | 0.3085 | 0.3260 |
| | Wp2 | 0.3085 | 0.3260 |
| | | 0.3140 | 0.3320 |
| | | 0.3150 | 0.3210 |
| | | 0.3100 | 0.3150 |
| | Wp3 | 0.3130 | 0.3430 |
| | | 0.3190 | 0.3490 |
| | | 0.3195 | 0.3380 |
| | | 0.3140 | 0.3320 |
| | Wp4 | 0.3140 | 0.3320 |
| | | 0.3195 | 0.3380 |
| | | 0.3200 | 0.3270 |
| | | 0.3150 | 0.3210 |
| | Wq1 | 0.3100 | 0.3150 |
| | | 0.3150 | 0.3210 |
| | | 0.3163 | 0.3118 |
| | | 0.3115 | 0.3060 |
| | Wq2 | 0.3115 | 0.3060 |
| | | 0.3163 | 0.3118 |
| | | 0.3175 | 0.3025 |
| | | 0.3130 | 0.2970 |
| | Wq3 | 0.3150 | 0.3210 |
| | | 0.3200 | 0.3270 |
| | | 0.3208 | 0.3173 |
| | | 0.3163 | 0.3118 |
| Wq4 | 0.3163 | 0.3118 | |
| | 0.3208 | 0.3173 | |
| | 0.3215 | 0.3075 | |
| | 0.3175 | 0.3025 | |

| Bin Code | Sub-bin | x | y |
|----------|---------|--------|--------|
| W4 | Wr1 | 0.3190 | 0.3490 |
| | | 0.3245 | 0.3545 |
| | | 0.3248 | 0.3438 |
| | | 0.3195 | 0.3380 |
| | Wr2 | 0.3195 | 0.3380 |
| | | 0.3248 | 0.3438 |
| | | 0.3250 | 0.3330 |
| | | 0.3200 | 0.3270 |
| | Wr3 | 0.3245 | 0.3545 |
| | | 0.3300 | 0.3600 |
| | | 0.3300 | 0.3495 |
| | | 0.3248 | 0.3438 |
| | Wr4 | 0.3248 | 0.3438 |
| | | 0.3300 | 0.3495 |
| | | 0.3300 | 0.3390 |
| | | 0.3250 | 0.3330 |
| | Ws1 | 0.3200 | 0.3270 |
| | | 0.3250 | 0.3330 |
| | | 0.3255 | 0.3230 |
| | | 0.3208 | 0.3173 |
| | Ws2 | 0.3208 | 0.3173 |
| | | 0.3255 | 0.3230 |
| | | 0.3260 | 0.3130 |
| | | 0.3215 | 0.3075 |
| | Ws3 | 0.3250 | 0.3330 |
| | | 0.3300 | 0.3390 |
| | | 0.3300 | 0.3285 |
| | | 0.3255 | 0.3230 |
| Ws4 | 0.3255 | 0.3230 | |
| | 0.3300 | 0.3285 | |
| | 0.3300 | 0.3180 | |
| | 0.3260 | 0.3130 | |

| Bin Code | Sub-bin | x | y |
|----------|---------|--------|--------|
| W5 | Wt1 | 0.3300 | 0.3600 |
| | | 0.3378 | 0.3663 |
| | | 0.3375 | 0.3563 |
| | | 0.3300 | 0.3495 |
| | Wt2 | 0.3300 | 0.3495 |
| | | 0.3375 | 0.3563 |
| | | 0.3372 | 0.3463 |
| | | 0.3300 | 0.3390 |
| | Wt3 | 0.3378 | 0.3663 |
| | | 0.3455 | 0.3725 |
| | | 0.3449 | 0.3630 |
| | | 0.3375 | 0.3563 |
| | Wt4 | 0.3375 | 0.3563 |
| | | 0.3449 | 0.3630 |
| | | 0.3443 | 0.3535 |
| | | 0.3372 | 0.3463 |
| | Wu1 | 0.3300 | 0.3390 |
| | | 0.3372 | 0.3463 |
| | | 0.3368 | 0.3363 |
| | | 0.3300 | 0.3285 |
| | Wu2 | 0.3300 | 0.3285 |
| | | 0.3368 | 0.3363 |
| | | 0.3365 | 0.3263 |
| | | 0.3300 | 0.3180 |
| | Wu3 | 0.3372 | 0.3463 |
| | | 0.3443 | 0.3535 |
| | | 0.3437 | 0.3440 |
| | | 0.3368 | 0.3363 |
| Wu4 | 0.3368 | 0.3363 | |
| | 0.3437 | 0.3440 | |
| | 0.3430 | 0.3345 | |
| | 0.3365 | 0.3263 | |

* Tolerance of measurement of the color coordinates is ± 0.01

COLOR BIN LIMIT

Cool White (3 X 50 mA) - CLP6B-WKW

| Bin Code | Sub-bin | x | y |
|----------|---------|--------|--------|
| W5 | Wv1 | 0.3455 | 0.3725 |
| | | 0.3533 | 0.3788 |
| | | 0.3523 | 0.3698 |
| | | 0.3449 | 0.3630 |
| | Wv2 | 0.3449 | 0.3630 |
| | | 0.3523 | 0.3698 |
| | | 0.3514 | 0.3608 |
| | | 0.3443 | 0.3535 |
| | Wv3 | 0.3533 | 0.3788 |
| | | 0.3610 | 0.3850 |
| | | 0.3598 | 0.3765 |
| | | 0.3523 | 0.3698 |
| | Wv4 | 0.3523 | 0.3698 |
| | | 0.3598 | 0.3765 |
| | | 0.3585 | 0.3680 |
| | | 0.3514 | 0.3608 |
| | Ww1 | 0.3443 | 0.3535 |
| | | 0.3514 | 0.3608 |
| | | 0.3505 | 0.3518 |
| | | 0.3437 | 0.3440 |
| | Ww2 | 0.3437 | 0.3440 |
| | | 0.3505 | 0.3518 |
| | | 0.3495 | 0.3428 |
| | | 0.3430 | 0.3345 |
| | Ww3 | 0.3514 | 0.3608 |
| | | 0.3585 | 0.3680 |
| | | 0.3573 | 0.3595 |
| | | 0.3505 | 0.3518 |
| Ww4 | 0.3505 | 0.3518 | |
| | 0.3573 | 0.3595 | |
| | 0.3560 | 0.3510 | |
| | 0.3495 | 0.3428 | |

* Tolerance of measurement of the color coordinates is ± 0.01

COLOR BIN LIMIT

Warm White (3 X 50 mA) - CLP6B-MKW

| Bin Code | Sub-bin | x | y |
|----------|---------|--------|--------|
| M1 | Ma1 | 0.3610 | 0.3900 |
| | | 0.3715 | 0.3987 |
| | | 0.3689 | 0.3853 |
| | | 0.3593 | 0.3776 |
| | Ma2 | 0.3715 | 0.3987 |
| | | 0.3820 | 0.4075 |
| | | 0.3786 | 0.3929 |
| | | 0.3689 | 0.3853 |
| | Ma3 | 0.3689 | 0.3853 |
| | | 0.3786 | 0.3929 |
| | | 0.3751 | 0.3783 |
| | | 0.3664 | 0.3717 |
| | Ma4 | 0.3593 | 0.3776 |
| | | 0.3689 | 0.3853 |
| | | 0.3664 | 0.3717 |
| | | 0.3576 | 0.3651 |
| | Mb1 | 0.3576 | 0.3651 |
| | | 0.3664 | 0.3717 |
| | | 0.3638 | 0.3582 |
| | | 0.3559 | 0.3526 |
| | Mb2 | 0.3664 | 0.3717 |
| | | 0.3751 | 0.3783 |
| | | 0.3717 | 0.3637 |
| | | 0.3638 | 0.3582 |
| | Mb3 | 0.3638 | 0.3582 |
| | | 0.3717 | 0.3637 |
| | | 0.3682 | 0.3491 |
| | | 0.3612 | 0.3446 |
| Mb4 | 0.3559 | 0.3526 | |
| | 0.3638 | 0.3582 | |
| | 0.3612 | 0.3446 | |
| | 0.3541 | 0.3401 | |

| Bin Code | Sub-bin | x | y |
|----------|---------|--------|--------|
| M1 | Mc1 | 0.3820 | 0.4075 |
| | | 0.3925 | 0.4163 |
| | | 0.3882 | 0.4006 |
| | | 0.3786 | 0.3929 |
| | Mc2 | 0.3925 | 0.4163 |
| | | 0.4030 | 0.4250 |
| | | 0.3978 | 0.4083 |
| | | 0.3882 | 0.4006 |
| | Mc3 | 0.3882 | 0.4006 |
| | | 0.3978 | 0.4083 |
| | | 0.3926 | 0.3915 |
| | | 0.3839 | 0.3849 |
| | Mc4 | 0.3786 | 0.3929 |
| | | 0.3882 | 0.4006 |
| | | 0.3839 | 0.3849 |
| | | 0.3751 | 0.3783 |
| | Md1 | 0.3751 | 0.3783 |
| | | 0.3839 | 0.3849 |
| | | 0.3796 | 0.3693 |
| | | 0.3717 | 0.3637 |
| | Md2 | 0.3839 | 0.3849 |
| | | 0.3926 | 0.3915 |
| | | 0.3874 | 0.3748 |
| | | 0.3796 | 0.3693 |
| | Md3 | 0.3796 | 0.3693 |
| | | 0.3874 | 0.3748 |
| | | 0.3822 | 0.3580 |
| | | 0.3752 | 0.3536 |
| Md4 | 0.3717 | 0.3637 | |
| | 0.3796 | 0.3693 | |
| | 0.3752 | 0.3536 | |
| | 0.3682 | 0.3491 | |

| Bin Code | Sub-bin | x | y |
|----------|---------|--------|--------|
| M2 | Me1 | 0.4030 | 0.4250 |
| | | 0.4145 | 0.4320 |
| | | 0.4084 | 0.4145 |
| | | 0.3978 | 0.4083 |
| | Me2 | 0.4145 | 0.4320 |
| | | 0.4260 | 0.4390 |
| | | 0.4189 | 0.4206 |
| | | 0.4084 | 0.4145 |
| | Me3 | 0.4084 | 0.4145 |
| | | 0.4189 | 0.4206 |
| | | 0.4118 | 0.4021 |
| | | 0.4022 | 0.3968 |
| | Me4 | 0.3978 | 0.4083 |
| | | 0.4084 | 0.4145 |
| | | 0.4022 | 0.3968 |
| | | 0.3926 | 0.3915 |
| | Mf1 | 0.3926 | 0.3915 |
| | | 0.4022 | 0.3968 |
| | | 0.3961 | 0.3793 |
| | | 0.3874 | 0.3748 |
| | Mf2 | 0.4022 | 0.3968 |
| | | 0.4118 | 0.4021 |
| | | 0.4047 | 0.3837 |
| | | 0.3961 | 0.3793 |
| | Mf3 | 0.3961 | 0.3793 |
| | | 0.4047 | 0.3837 |
| | | 0.3976 | 0.3653 |
| | | 0.3899 | 0.3617 |
| Mf4 | 0.3874 | 0.3748 | |
| | 0.3961 | 0.3793 | |
| | 0.3899 | 0.3617 | |
| | 0.3822 | 0.3580 | |

* Tolerance of measurement of the color coordinates is ± 0.01

COLOR BIN LIMIT

Warm White (3 X 50 mA) - CLP6B-MKW


| Bin Code | Sub-bin | x | y |
|----------|---------|--------|--------|
| M2 | Mg1 | 0.4260 | 0.4390 |
| | | 0.4375 | 0.4460 |
| | | 0.4295 | 0.4268 |
| | | 0.4189 | 0.4206 |
| | Mg2 | 0.4375 | 0.4460 |
| | | 0.4490 | 0.4530 |
| | | 0.4400 | 0.4329 |
| | | 0.4295 | 0.4268 |
| | Mg3 | 0.4295 | 0.4268 |
| | | 0.4400 | 0.4329 |
| | | 0.4310 | 0.4128 |
| | | 0.4214 | 0.4075 |
| | Mg4 | 0.4189 | 0.4206 |
| | | 0.4295 | 0.4268 |
| | | 0.4214 | 0.4075 |
| | | 0.4118 | 0.4021 |
| | Mh1 | 0.4118 | 0.4021 |
| | | 0.4214 | 0.4075 |
| | | 0.4134 | 0.3882 |
| | | 0.4047 | 0.3837 |
| Mh2 | 0.4214 | 0.4075 | |
| | 0.4310 | 0.4128 | |
| | 0.4220 | 0.3927 | |
| | 0.4134 | 0.3882 | |
| Mh3 | 0.4134 | 0.3882 | |
| | 0.4220 | 0.3927 | |
| | 0.4129 | 0.3725 | |
| | 0.4053 | 0.3689 | |
| Mh4 | 0.4047 | 0.3837 | |
| | 0.4134 | 0.3882 | |
| | 0.4053 | 0.3689 | |
| | 0.3976 | 0.3653 | |

| Bin Code | Sub-bin | x | y |
|----------|---------|--------|--------|
| M3 | Mj1 | 0.4490 | 0.4530 |
| | | 0.4638 | 0.4578 |
| | | 0.4540 | 0.4372 |
| | | 0.4400 | 0.4329 |
| | Mj2 | 0.4638 | 0.4578 |
| | | 0.4785 | 0.4625 |
| | | 0.4679 | 0.4414 |
| | | 0.4540 | 0.4372 |
| | Mj3 | 0.4540 | 0.4372 |
| | | 0.4679 | 0.4414 |
| | | 0.4572 | 0.4203 |
| | | 0.4441 | 0.4166 |
| | Mj4 | 0.4400 | 0.4329 |
| | | 0.4540 | 0.4372 |
| | | 0.4441 | 0.4166 |
| | | 0.4310 | 0.4128 |
| | Mk1 | 0.4310 | 0.4128 |
| | | 0.4441 | 0.4166 |
| | | 0.4343 | 0.3960 |
| | | 0.4220 | 0.3927 |
| Mk2 | 0.4441 | 0.4166 | |
| | 0.4572 | 0.4203 | |
| | 0.4466 | 0.3993 | |
| | 0.4343 | 0.3960 | |
| Mk3 | 0.4343 | 0.3960 | |
| | 0.4466 | 0.3993 | |
| | 0.4359 | 0.3782 | |
| | 0.4244 | 0.3754 | |
| Mk4 | 0.4220 | 0.3927 | |
| | 0.4343 | 0.3960 | |
| | 0.4244 | 0.3754 | |
| | 0.4129 | 0.3726 | |

| Bin Code | Sub-bin | x | y |
|----------|---------|--------|--------|
| M3 | Mm1 | 0.4785 | 0.4625 |
| | | 0.4933 | 0.4673 |
| | | 0.4818 | 0.4457 |
| | | 0.4679 | 0.4414 |
| | Mm2 | 0.4933 | 0.4673 |
| | | 0.5080 | 0.4720 |
| | | 0.4957 | 0.4500 |
| | | 0.4818 | 0.4457 |
| | Mm3 | 0.4818 | 0.4457 |
| | | 0.4957 | 0.4500 |
| | | 0.4834 | 0.4279 |
| | | 0.4703 | 0.4241 |
| | Mm4 | 0.4679 | 0.4414 |
| | | 0.4818 | 0.4457 |
| | | 0.4703 | 0.4241 |
| | | 0.4572 | 0.4203 |
| | Mn1 | 0.4572 | 0.4203 |
| | | 0.4703 | 0.4241 |
| | | 0.4589 | 0.4026 |
| | | 0.4466 | 0.3993 |
| Mn2 | 0.4703 | 0.4241 | |
| | 0.4834 | 0.4279 | |
| | 0.4711 | 0.4059 | |
| | 0.4589 | 0.4026 | |
| Mn3 | 0.4589 | 0.4026 | |
| | 0.4711 | 0.4059 | |
| | 0.4588 | 0.3838 | |
| | 0.4474 | 0.3810 | |
| Mn4 | 0.4466 | 0.3993 | |
| | 0.4589 | 0.4026 | |
| | 0.4474 | 0.3810 | |
| | 0.4359 | 0.3782 | |

* Tolerance of measurement of the color coordinates is ± 0.01

CIE CHROMATICITY DIAGRAM

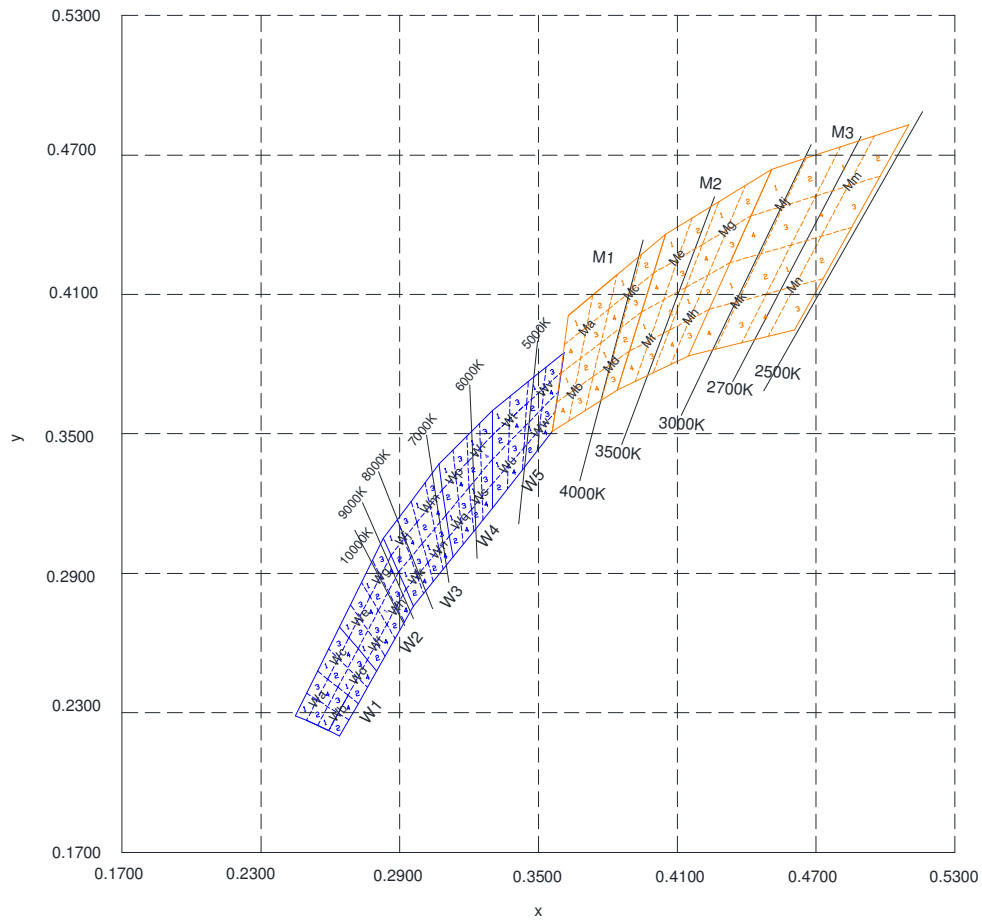

ORDER CODE TABLE

| Color | Kit Number | Luminous Intensity (mcd) | | Color Bin Code |
|------------|--------------------|--------------------------|-------|----------------|
| | | Min. | Max. | |
| Cool White | CLP6B-WKW-CC0F0153 | 9000 | 22400 | W1,W2,W3,W4,W5 |
| | CLP6B-WKW-CC0E0233 | 9000 | 18000 | W2,W3 |
| | CLP6B-WKW-CC0E0453 | 9000 | 18000 | W4,W5 |
| | CLP6B-WKW-CD0E0233 | 11200 | 18000 | W2,W3 |
| | CLP6B-WKW-CD0E0453 | 11200 | 18000 | W4,W5 |
| | CLP6B-WKW-CD0F0233 | 11200 | 22400 | W2,W3 |
| | CLP6B-WKW-CD0F0453 | 11200 | 22400 | W4,W5 |

| Color | Kit Number | Luminous Intensity (mcd) | | Color Bin Code |
|------------|--------------------|--------------------------|-------|----------------|
| | | Min. | Max. | |
| Warm White | CLP6B-MKW-CB0F0133 | 7100 | 22400 | M1,M2,M3 |
| | CLP6B-MKW-CB0F0233 | 7100 | 22400 | M2,M3 |
| | CLP6B-MKW-CB0F0513 | 7100 | 22400 | W5,M1 |
| | CLP6B-MKW-CB0E0133 | 7100 | 18000 | M1,M2,M3 |
| | CLP6B-MKW-CB0E0233 | 7100 | 18000 | M2,M3 |
| | CLP6B-MKW-CB0E0513 | 7100 | 18000 | W5,M1 |
| | CLP6B-MKW-CC0E0233 | 9000 | 18000 | M2,M3 |
| | CLP6B-MKW-CC0E0513 | 9000 | 18000 | W5,M1 |
| | CLP6B-MKW-CC0F0233 | 9000 | 22400 | M2,M3 |
| | CLP6B-MKW-CC0F0513 | 9000 | 22400 | W5,M1 |

Notes:

- The above kit numbers represent order codes that include multiple intensity-bin and color-bin codes. Only one intensity-bin code and one color-bin code will be shipped on each bulk. Single intensity-bin code and single color-bin codes will not be orderable.
- Please refer to the [HB LED Lamp Reliability Test Standards](#) document for reliability test conditions.
- Please refer to the [HB LED Lamp Soldering & Handling](#) document for information about how to use this LED product safely.

GRAPHS

The data below are collected from statistical figures that do not necessarily correspond to the actual parameters of each single LED. Hence, these data will be changed without further notice.




FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE.




FIG.2 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT




FIG.3 REVERSE CURRENT VS. REVERSE VOLTAGE.

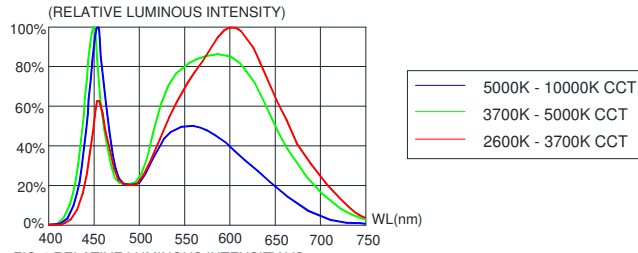


FIG.4 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH.




FIG.5 MAXIMUM FORWARD DC CURRENT VS AMBIENT TEMPERATURE ($T_{jmax}=110^{\circ}C$)


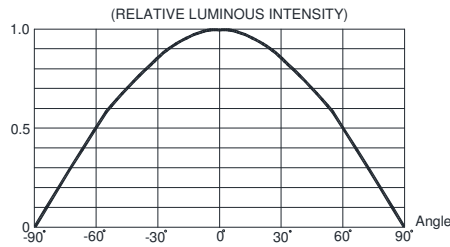


FIG.6 FAR FIELD PATTERN

MECHANICAL DIMENSIONS

All dimensions are in mm.

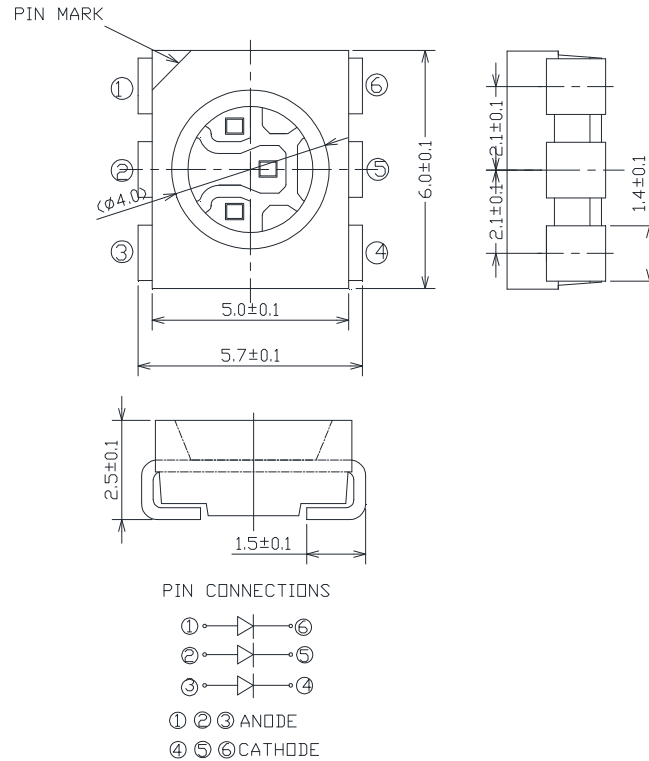

NOTES

RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Cree LED representative or from the [Product Ecology](#) section of the Cree LED website.


Vision Advisory

WARNING: Do not look at an exposed lamp in operation. Eye injury can result.

KIT NUMBER SYSTEM


Cree LED lamps are tested and sorted into performance bins. A bin is specified by ranges of color, forward voltage, and brightness. Sorted LEDs are packaged for shipping in various convenient options.

Cree LEDs are sold by order codes in combinations of bins called kits. Order codes are configured in the following manner:

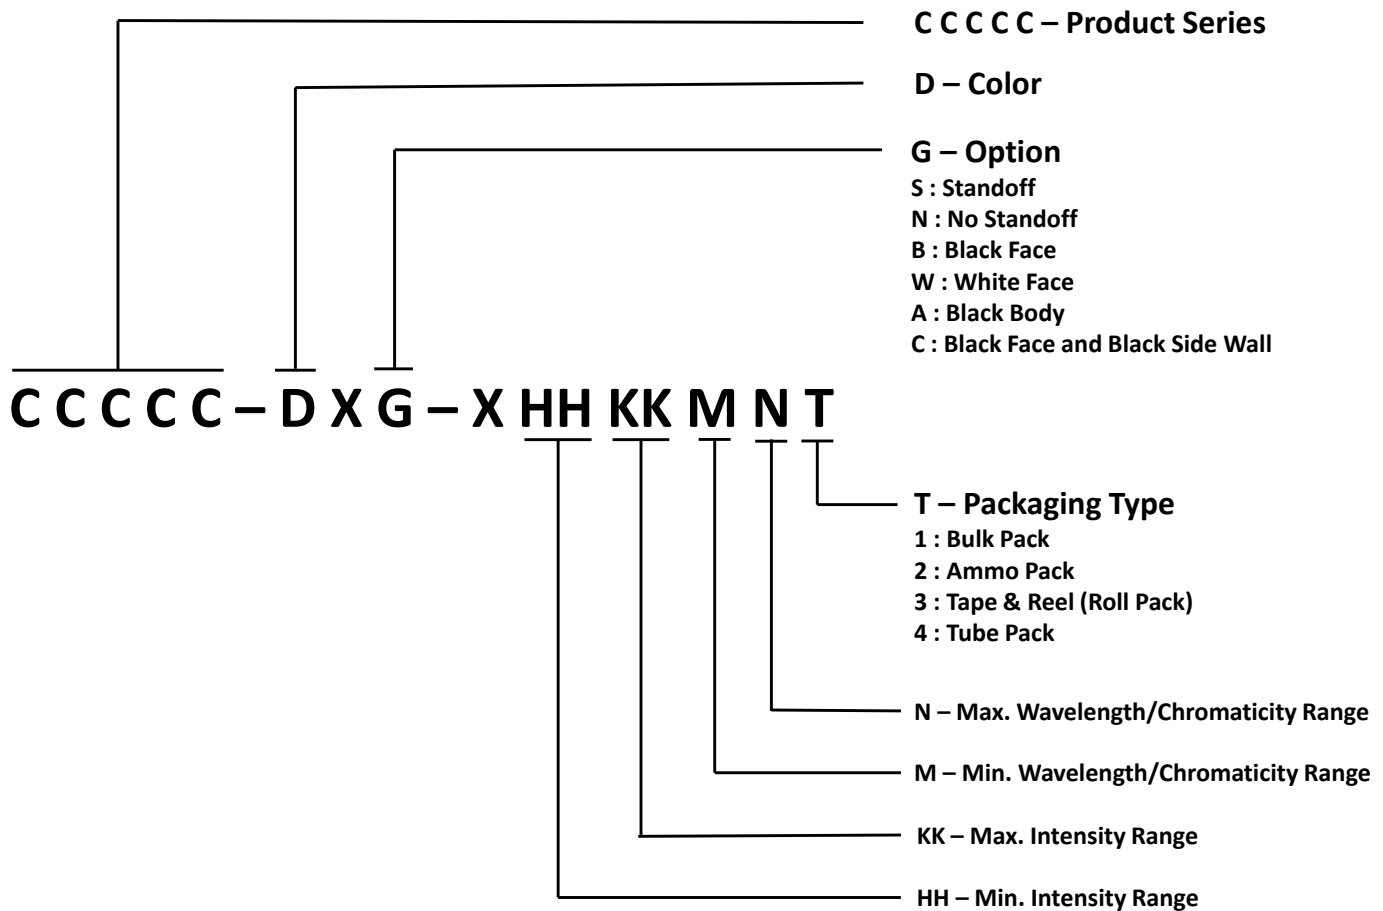

REFLOW SOLDERING


- The CLP6B-WKW/MKW is rated as a MSL 5a product.
- The recommended floor life out of bag is 24hrs.
- The temperature profile is as below.

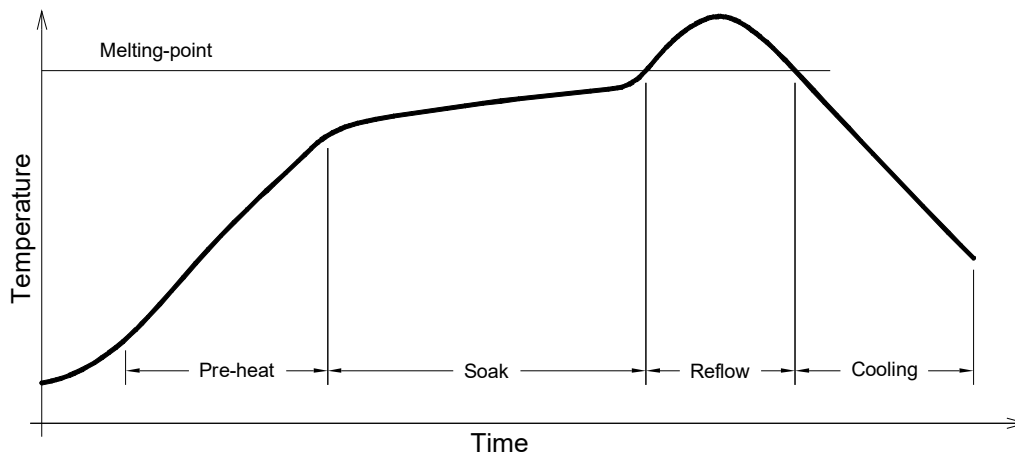

Use only with CLP6B-WKW/MKW


| Solder |
|--|
| Average ramp-up rate = 4°C/s max |
| Preheat temperature = 150°C ~200°C |
| Preheat time = 120s max |
| Ramp-down rate = 6°C/s max |
| Peak temperature = 250°C max |
| Time within 5°C of actual Peak Temperature = 10s max |
| Duration above 217°C is 60s max |

- The packaging sizes of these SMD products are very small and the resin is still soft after solidification. Users are required to handle with care. Never touch the resin surface of SMD products.
- To avoid damaging the product's surface and interior device, it is recommended to choose a special nozzle to pick up the SMD products during the process of SMT production. If handling is necessary, take special care when picking up these products. The following method is necessary:
- Please refer to the [HB LED Lamp Soldering & Handling](#) document for information about how to use this LED product safely.

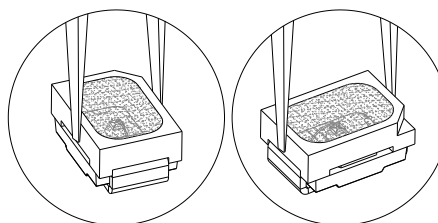

PACKAGING

- The LEDs are packed in cardboard boxes after packaging in normal or anti-electrostatic bags.
- Cardboard boxes will be used to protect the LEDs from mechanical shock during transportation.
- The boxes are not water resistant, and they must be kept away from water and moisture.
- The reel pack is applied in SMD LED.
- Max 900 pcs per reel.

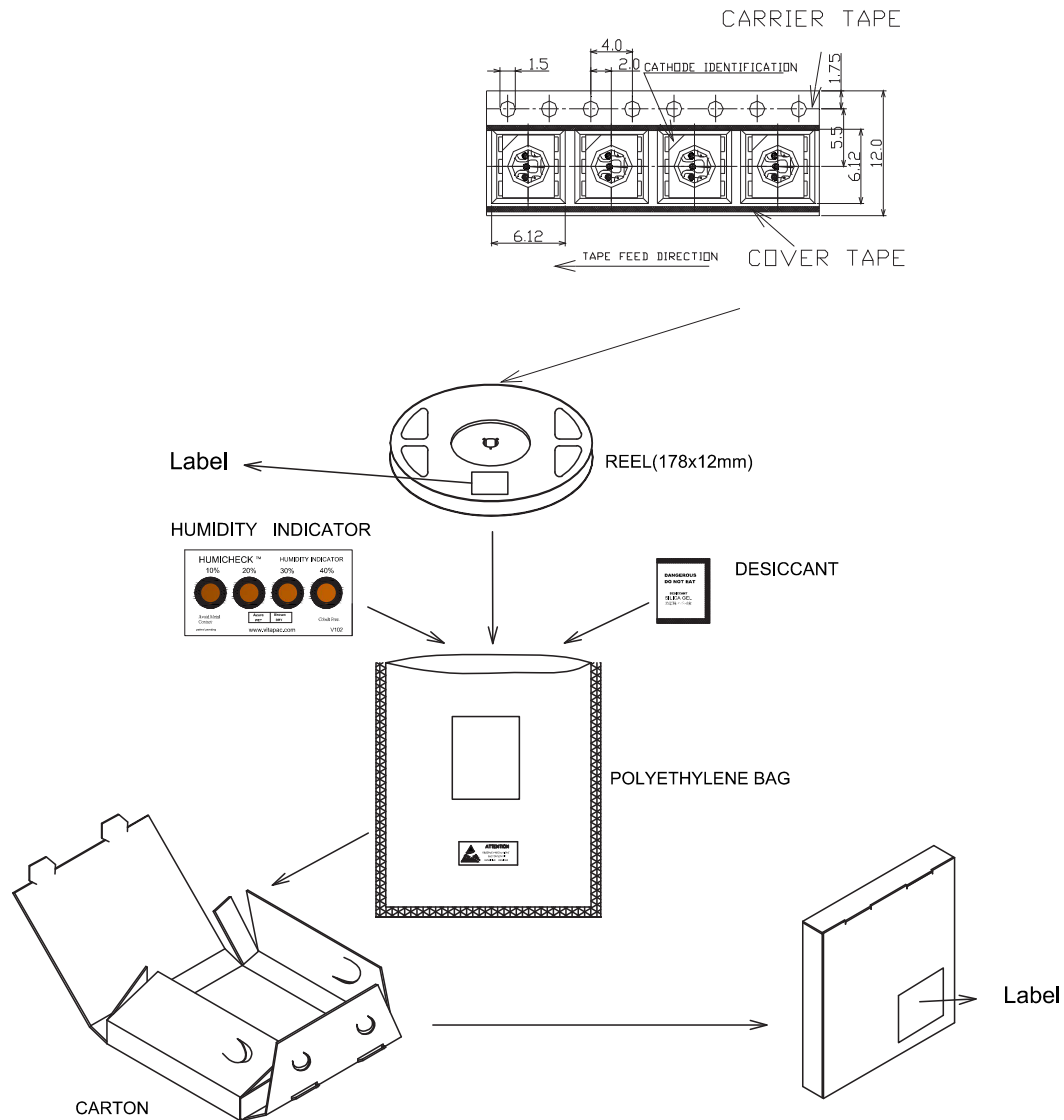

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.