

# ECX-H25CM-16.000 Datasheet

[www.digi-electronics.com](http://www.digi-electronics.com)



<https://www.DiGi-Electronics.com>

|                              |  |
|------------------------------|--|
| DiGi Electronics Part Number | ECX-H25CM-16.000-DG  |
| Manufacturer                 | <a href="#">ECS Inc.</a>   |
| Manufacturer Product Number  | ECX-H25CM-16.000   |
| Description                  | XTAL OSC XO 16.0000MHZ HCMOS SMD   |
| Detailed Description         | 16 MHz XO (Standard) HCMOS Oscillator 2.5V Enable/Disable 6-SMD, No Lead |



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

ECX-H25CM-16.000

Series:

ECX-H ECSpresCON™

Base Resonator:

Crystal

Frequency:

16 MHz

Output:

HCMOS

Frequency Stability:

±25ppm

Operating Temperature:

-20°C ~ 70°C

Current - Supply (Max):

40mA

Mounting Type:

Surface Mount

Size / Dimension:

0.197" L x 0.126" W (5.00mm x 3.20mm)

Current - Supply (Disable) (Max):

-

Manufacturer:

ECS Inc.

Product Status:

Active

Type:

XO (Standard)

Function:

Enable/Disable

Voltage - Supply:

2.5V

Absolute Pull Range (APR):

-

Spread Spectrum Bandwidth:

-

Ratings:

-

Package / Case:

6-SMD, No Lead

Height - Seated (Max):

0.051" (1.30mm)

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8542.39.0001

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99





ECX-H2 (2.5V) and ECX-H3 (3.3V) low jitter, low current  
Frequency Configurable SMD crystal controlled oscillators.

# ECSpresCON™

## ECX-H HCMOS Oscillator

Request a Sample



### OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

| Parameters                 | Conditions             | ECX-H2 (+2.5V) |      |           | ECX-H3 (+3.3V) |      |         | Units |
|----------------------------|------------------------|----------------|------|-----------|----------------|------|---------|-------|
|                            |                        | MIN            | TYP  | MAX       | MIN            | TYP  | MAX     |       |
| Frequency Range            |                        | 10.000         |      | 250.00    | 10.000         |      | 250.00  | MHz   |
| Operating Temperature      | Standard               | -10            |      | +70       | -10            |      | +70     | °C    |
|                            | Extended<br>(N Option) | -40            |      | +85       | -40            |      | +85     | °C    |
| Storage Temperature        |                        | -55            |      | +125      | -55            |      | +125    | °C    |
| Supply Voltage             |                        | +2.375         | +2.5 | +2.625    | +2.97          | +3.3 | +3.63   | VDC   |
| Frequency Stability *      | Option A               |                |      | ±100      |                |      | ±100    | ppm   |
|                            | Option B               |                |      | ±50       |                |      | ±50     | ppm   |
|                            | Option C               |                |      | ±25       |                |      | ±25     | ppm   |
|                            | Option D               |                |      | ±20       |                |      | ±20     | ppm   |
| Input Current              | 10.0 to 50.0 MHz       |                |      | 20        |                |      | 25      | mA    |
|                            | 50.1 to 150.0 MHz      |                |      | 25        |                |      | 30      | mA    |
|                            | 150.1 to 250 MHz       |                |      | 35        |                |      | 40      | mA    |
| Output Symmetry            | @ 50% Vcc level        |                |      | 48/52     |                |      | 48/52   | %     |
| Aging                      | @ +25°C (first year)   |                |      | ±2        |                |      | ±2      | ppm   |
| Rise and Fall Times        | 10% Vdd to 90% level   | 600            |      | 1500      | 600            |      | 1500    | ps    |
| "0" Level                  | VOL                    |                |      | 10% Vdd   |                |      | 10% Vdd | VDC   |
| "1" Level                  | VOH                    | 90% Vdd        |      |           | 90% Vdd        |      |         | VDC   |
| Output Load                | HCMOS                  |                |      | 15        |                |      | 15      | pF    |
| Output Enable              | Pin 1 **               | 0.7%           |      |           | 0.7%           |      |         | Vdd   |
| Output Disable             | Pin 1                  |                |      | 0.3%      |                |      | 0.3%    | Vdd   |
| Output Enable Times        |                        |                |      | 200       |                |      | 200     | ns    |
| Output Disable Times       |                        |                |      | 50        |                |      | 50      | ns    |
| Phase Jitter, rms          | 12 KHz to 20 MHz       |                | 1.0  |           |                | 1.0  |         | pS    |
| ESD Sensitivity            | Human Body Model       |                |      | 3 kV Max. |                |      |         |       |
| Absolute Voltage Range     |                        |                |      | +3.63     |                |      | +3.63   | VDC   |
| Moisture Sensitivity Level |                        |                |      | 1         |                |      |         |       |
| Termination Finish         |                        |                |      | Au        |                |      |         |       |

\*Note: Inclusive of 25°C tolerance, operating temperature, input voltage change, load change, shock and vibration.

\*\*Note: Internal pull-up resistor active output if pin 1 is left open.

| Part Numbering Guide    |                        |  |   |   |                    |   |
|-------------------------|------------------------|--|---|---|--------------------|---|
| Series                  | Voltage                | Package Size (mm)  | Stability   | Operating Temperature   | Frequency          | Packaging   |
| ECX-H<br>(HCMOS Output) | 2 = +2.5V<br>3 = +3.3V | 2 = 2.5 x 2<br>3 = 3.2 x 2.5<br>5 = 5 x 3.2<br>7 = 7 x 5 | A = ± 100 ppm<br>B = ± 50 ppm<br>C = ± 25 ppm<br>D = ± 20 ppm | L = -10 ~ +70°C<br>M = -20 ~ +70°C<br>N = -40 ~ +85°C<br>P = -40 ~ +105°C | Customer Specified | Blank =(Bulk)<br>-TR=Tape & Reel<br>(1K Min/Mult) |

**Example: ECX-H35BN-156.250**

# ECSpresS<sup>CON</sup><sup>TM</sup>


## ECX-H HCMOS Oscillator



### Phase Noise and Jitter Data (typical)

| SSB Phase Noise Data (dBc/Hz typical) | Frequency (offset) | 10.000 | 20.000 | 25.000 | 27.000 | 40.000 | 50.000 | 80.000 | 155.520 | 212.500 |
|---------------------------------------|--------------------|--------|--------|--------|--------|--------|--------|--------|---------|---------|
|                                       | 10 Hz              | -93.4  | -86.2  | -85.2  | -86.5  | -87    | -84.4  | -87.1  | -87.8   | -84.7   |
|                                       | 100 Hz             | -118   | -114.2 | -110   | -108.7 | -107.1 | -106.8 | -103   | -95.5   | -96     |
|                                       | 1 KHz              | -135.4 | -129.7 | -125.6 | -125.5 | -125.4 | -122   | -118   | -112.4  | -109.1  |
|                                       | 10 KHz             | -140.7 | -133.8 | -132.3 | -134.7 | -129.5 | -127.1 | -120.5 | -116.4  | -115    |
|                                       | 100 KHz            | -137.1 | -131.2 | -130.2 | -131.1 | -121   | -123.9 | -119.5 | -108.2  | -105.7  |
|                                       | 1 MHz              | -155.9 | -153.2 | -148.8 | -146.1 | -145.8 | -144.9 | -142.7 | -136.9  | -133.2  |
|                                       | 10 MHz             |        |        |        |        |        | -155   | -151.6 | -146    | -145.8  |
| Phase Jitter pS 12 KHz ~ 20 MHz, RMS  |                    | 0.94   | 0.96   | 0.93   | 0.94   | 1.03   | 0.98   | 1.13   | 1.27    | 1.34    |

### Phase Noise Plot of ECX-H35BM-77.760 (typical)

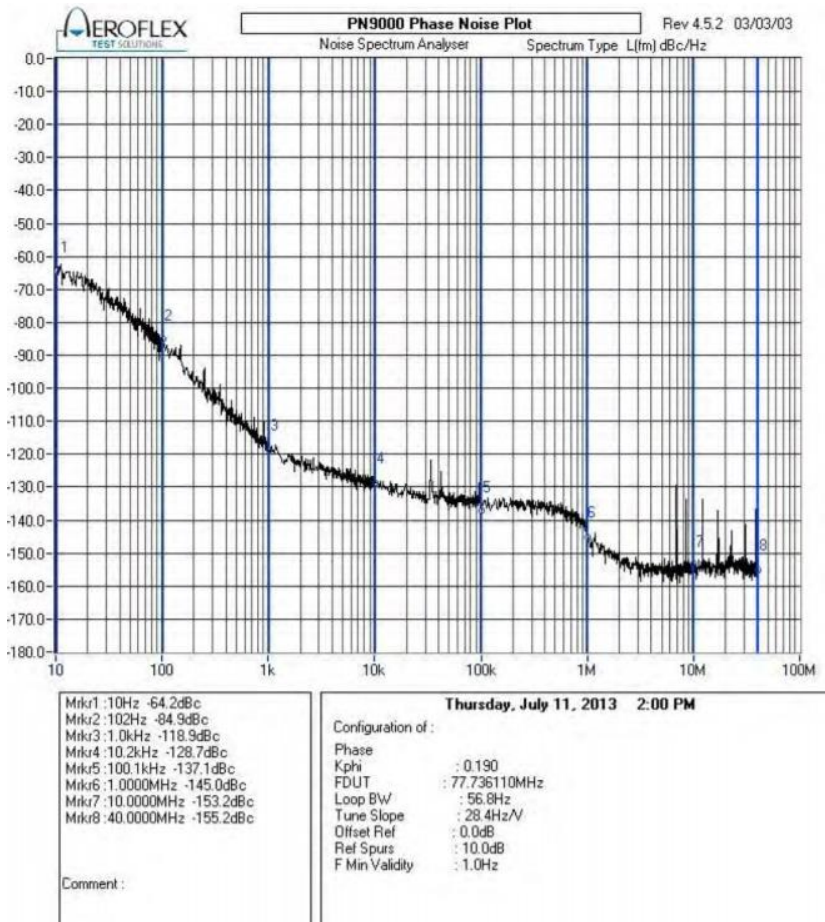

| Package Data |                           |
|--------------|---------------------------|
| Item         | Description               |
| Lid          | Metal                     |
| Base         | Ceramic                   |
| Plating      | Gold/Nickel Surface/Under |



# ECSpresCON™ ECX-H HCMOS Oscillator



## Dimensions (mm)

7 = 7x5 Package

5 = 5x3.2 Package

3 = 3.2x2.5 Package

2 = 2.5x2 Package

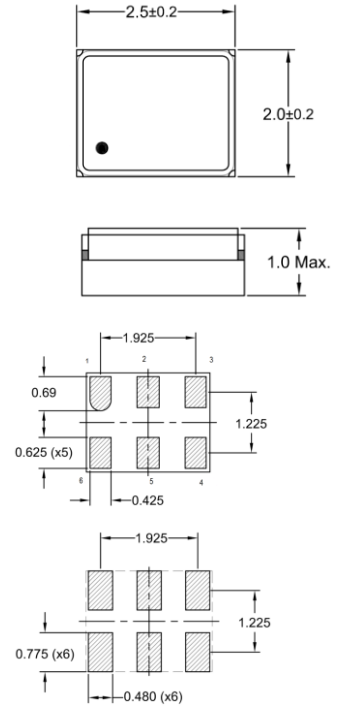
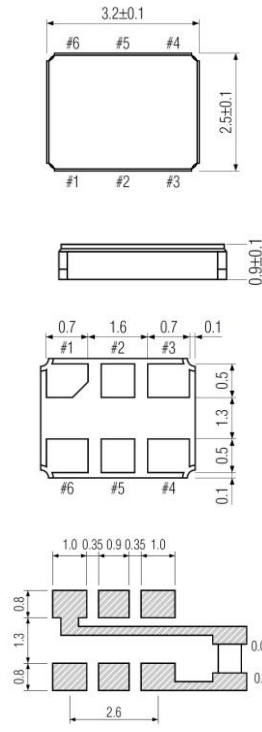
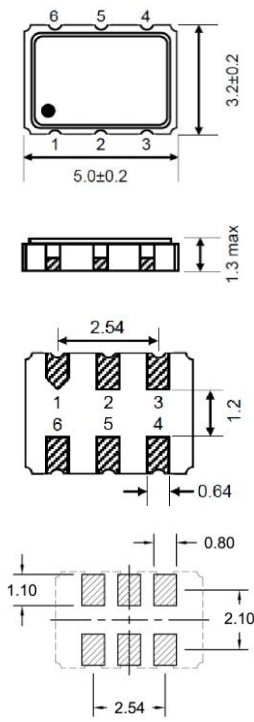
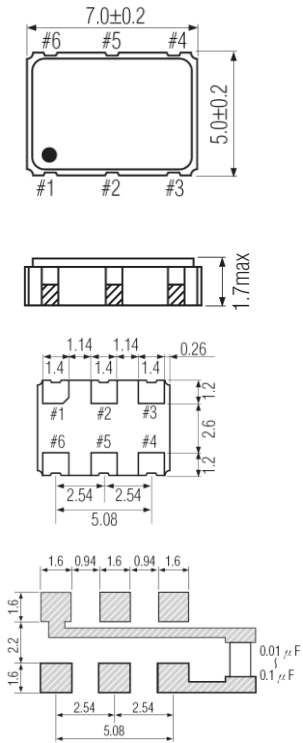



Figure 1) Top, Side, Bottom & Land

Figure 2) Top, Side, Bottom & Land

Figure 3) Top, Side, Bottom & Land

Figure 4) Top, Side, Bottom & Land

## Suggested Reflow Profile

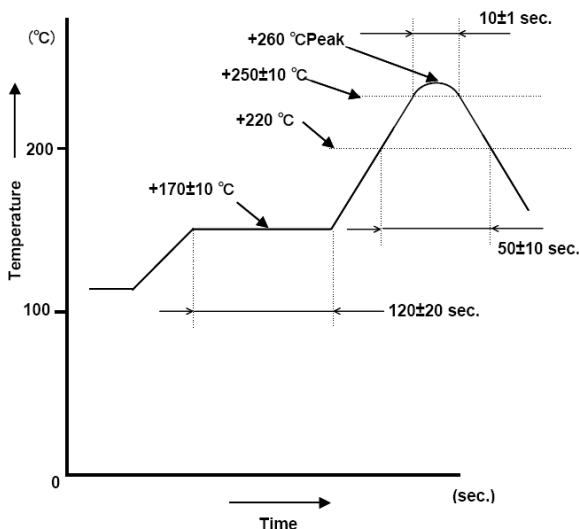

| Pin Connections |                   |
|-----------------|-------------------|
| Pin #           | Function          |
| 1               | O/E or No Connect |
| 2               | No Connect        |
| 3               | Ground            |
| 4               | Output            |
| 5               | No Connect        |
| 6               | Supply Voltage    |



## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.