

# A223M1CWCQ Datasheet



DiGi Electronics Part Number	A223M1CWCQ-DG
Manufacturer	<a href="#">Electroswitch</a>
Manufacturer Product Number	A223M1CWCQ
Description	SWITCH TOGGLE DPDT 6A 125V
Detailed Description	Toggle Switch DPDT Panel Mount

<https://www.DiGi-Electronics.com>

This model A223M1CWCQ is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

A223M1CWCQ

Series:

A

Part Status:

Active

Circuit:

DPDT

Current Rating (Amps):

6A (AC/DC)

Voltage Rating - DC:

28 V

Actuator Length:

5.08mm

Illumination Type, Color:

-

Termination Style:

PC Pin

Bushing Thread:

1/4-40

Features:

Epoxy Sealed Terminals

Actuator Material:

Brass, Chrome Plated

Base Product Number:

A223M1

Manufacturer:

Electroswitch

Packaging:

Bulk

Mounting Type:

Panel Mount

Switch Function:

On-On

Voltage Rating - AC:

125 V

Actuator Type:

Standard Round

Illumination:

Non-Illuminated

Illumination Voltage (Nominal):

-

Panel Cutout Dimensions:

-

Ingress Protection:

Splash Proof

Operating Temperature:

-30°C ~ 90°C

Electrical Life:

60,000 Cycles

## Environmental & Export classification

RoHS Status:

RoHS Compliant

REACH Status:

Vendor Undefined

HTSUS:

8536.50.9065

Moisture Sensitivity Level (MSL):

Not Applicable

ECCN:

EAR99


**Ordering Table — Standard Toggle Switches**

**HOW TO ORDER YOUR DESIGN** (Bold Face Type indicates items normally in Distributor Stock)

Following the table from left to right, the designer is able to specify the options wanted. The options are described and illustrated on pages 24-31. Refer to page 57 for mounting hardware.

To determine a part number select the options desired and fill in the boxes in the selection guides illustrated below.

**Toggle Switch Selection Guide**

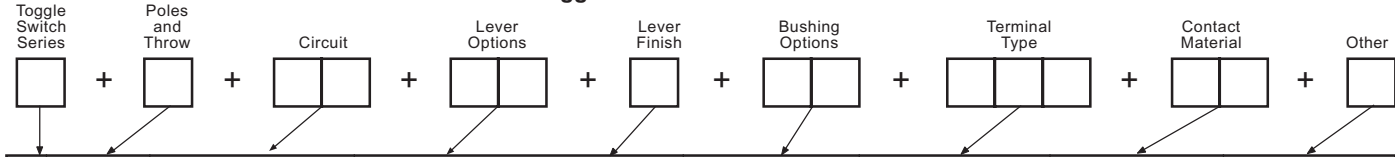

Series	Poles and Throw		Circuits <sup>10</sup>				Lever Options and Finishes				Bushing Options		Terminal Options <sup>7</sup>		Contact Material		Other Option	
	No.	Code	Keyway			Code	Type	Code	Finish	Code	Type	Code	Type	Code	Type	Code	Type	Code
A	SPDT	1			POS. "C"		Lever Lock K Bushing Only	K1	Bright Chrome <sup>14</sup>	1	Splashproof Lever <sup>9</sup> & Bushing Seal	CW	Right Angle PC <sup>11</sup>	A	Gold/Nickel/Brass	B	Epoxy Sealed <sup>7</sup> Terminals	
	DPDT	2	ON	OFF	ON	21	.840 Bat	L0	Stain Chrome	2	Splashproof <sup>9</sup> Lever Seal Only	CX	Vertical PC .100 Spacing	AV	Gold/Nickel/Silver	G	Anti-Rotation	P
							.640 Bat	L1	Black <sup>1</sup>	3	.280 Threaded	D	Vertical PC .150 Spacing	AV2	Coin Silver	Q	Anti-Jam	
	3PDT	3	ON	NONE	ON	23	.550 Bat	L2			2	Locking K1 Lever Only	H3	Right Angle <sup>9</sup> Same Throw			K	Bushing <sup>4</sup>
							Long Mod Cap	L3	Black Nylon <sup>8</sup>	4	.280 Smooth <sup>2</sup>	D9	Printed Circuit Terminals	C		L		
	4PDT	4	ON	NONE	ON*	26	Short Mod Cap	L4	Red Nylon <sup>8</sup>	5	.350 Flatted With Shoulder	H	Right Angle <sup>9</sup> Opposite Throw	R		M		
							.200 Bat	M	White Nylon <sup>8</sup>	6	.350 Keyway With Shoulder	K	PC & Support <sup>6</sup>	V30				
			ON*	OFF	ON*	27	.840 Flat	P1			15/32 Dia. <sup>12</sup>	T	PC & Support <sup>6</sup>	V40				
			ON	OFF	ON*	31	.450 Flat	P3			Splashproof Lever <sup>12</sup> 15/32 & Panel Seal	TW	PC & Support <sup>6</sup>	V60				
			ON	ON	ON	32	.250 Flat	P4			15/32 Splashproof <sup>12</sup> Lever Seal Only	TX	PC & Support <sup>6</sup>	V70				
			ON	ON	ON*	33	.410 Bat	S			.350 Threaded	Y	.750 Wire Wrap	W				
			NONE	ON	ON*	34 <sup>5</sup>	.468 Large <sup>13</sup>	T1			.437 Threaded (With P3 Only)	Y5	.964 Wire Wrap	W1				
			ON*	ON	ON*	35	.687 Large <sup>13</sup>	T			.350 Smooth	Y9	1.062 Wire Wrap	W3				
			NONE	ON	ON	53 <sup>5</sup>							Solder Lugs	Z				
													Quick Connect	Z3				

\*Momentary Contact

- <sup>1</sup> Available on S, M and P3 only.
- <sup>2</sup> Add .070 to lever length when using these bushings.
- <sup>3</sup> Available with S, M, L0, L1, L2, L3, L4 lever options. Consult factory for availability.
- <sup>4</sup> Standard on P1, P3, P4 and K1 lever options. Available on all other levers except T & T1.
- <sup>5</sup> These circuits are **NOT** available with the following 3 and 4 pole options: A, AV, AV2, V30, V40, V60 and V70.
- <sup>6</sup> 1 and 2 pole only.
- <sup>7</sup> Epoxy seal standard on all terminal options.

- <sup>8</sup> Available only with L3 and L4 levers.
- <sup>9</sup> Available in 1 pole only.
- <sup>10</sup> See page 58 for construction detail, wiring and electrical diagrams.
- <sup>11</sup> 1, 2 and 3 pole only.
- <sup>12</sup> Available on T or T1 lever options only.
- <sup>13</sup> Available on T, TW, and TX bushing options. (Bright chrome only.)
- <sup>14</sup> Not available on K1 lever.
- <sup>15</sup> Same as B, G and Q respectively except terminals brass with tin nickel alloy over nickel plate. Consult plant for availability.

**EXAMPLES:**

**A232L01YW1B** = DPDT toggle switch with an ON-ON-ON circuit, .840" long lever in a bright chrome finish, .350 threaded bushing, .964" long wire wrap terminals, gold/brass contacts and epoxy sealed terminals.

**SPECIFICATIONS:**

**Contact Ratings —**

Letter codes G and Q — 6 amp at 125 VAC, 3 amp @ 250 VAC (U.L. recognized, CSA certified) or 6 amp at 28 VDC resistive.

Letter codes B and G — 0.5. volt-amp (VA) maximum @ 28 V maximum (AC or DC).

**Life Under Load** — 60,000 make-and-break cycles — resistive load only.

**Initial Contact Resistance** — 10 milliohms maximum 3 VDC, 100 ma for both silver and gold plated contacts.

**Insulation Resistance** — 1 & 2 pole —1,000 megohms, min.  
3 & 4 pole —1,000 megohms, min.

**Dielectric Strength** — 1,000 volts rms at sea level.

**Bushing Strength** — 12 pound-inches without physical damage to switch.

**Weight (including hardware)** — SP 0.19 oz.; DP 0.23 oz.; 3-pole 0.28 oz.; 4-pole 0.32 oz.

**MATERIALS:**

**Base (body)** — 1- and 2-pole —Diallyl Phthalate (DAP).  
3- and 4-pole — high strength phenolic.

**Lever (toggle)** — Brass, chrome plated.

**Flat Lever** — Brass, satin chrome finish.

**Locking lever cap** — Anodized aluminum.

**Bushing** — Brass, nickel plated.

**Clamp (frame)** — Stainless steel.

**Support brackets** — Steel, tin plated.

**Switching Contacts and Rockers** —

Letter Code B — gold/nickel/brass

Letter Code G — gold/nickel/silver

Letter Code Q — Coin silver

**Center Terminal**


Letter Codes B, G — Gold flash/nickel/brass

Letter Code Q — Silver plated brass.


**Hardware** — See page 55-57.

**Toggle Switches — Base Dimensions and Lever Options**

**APPROXIMATE BASE DIMENSIONS**

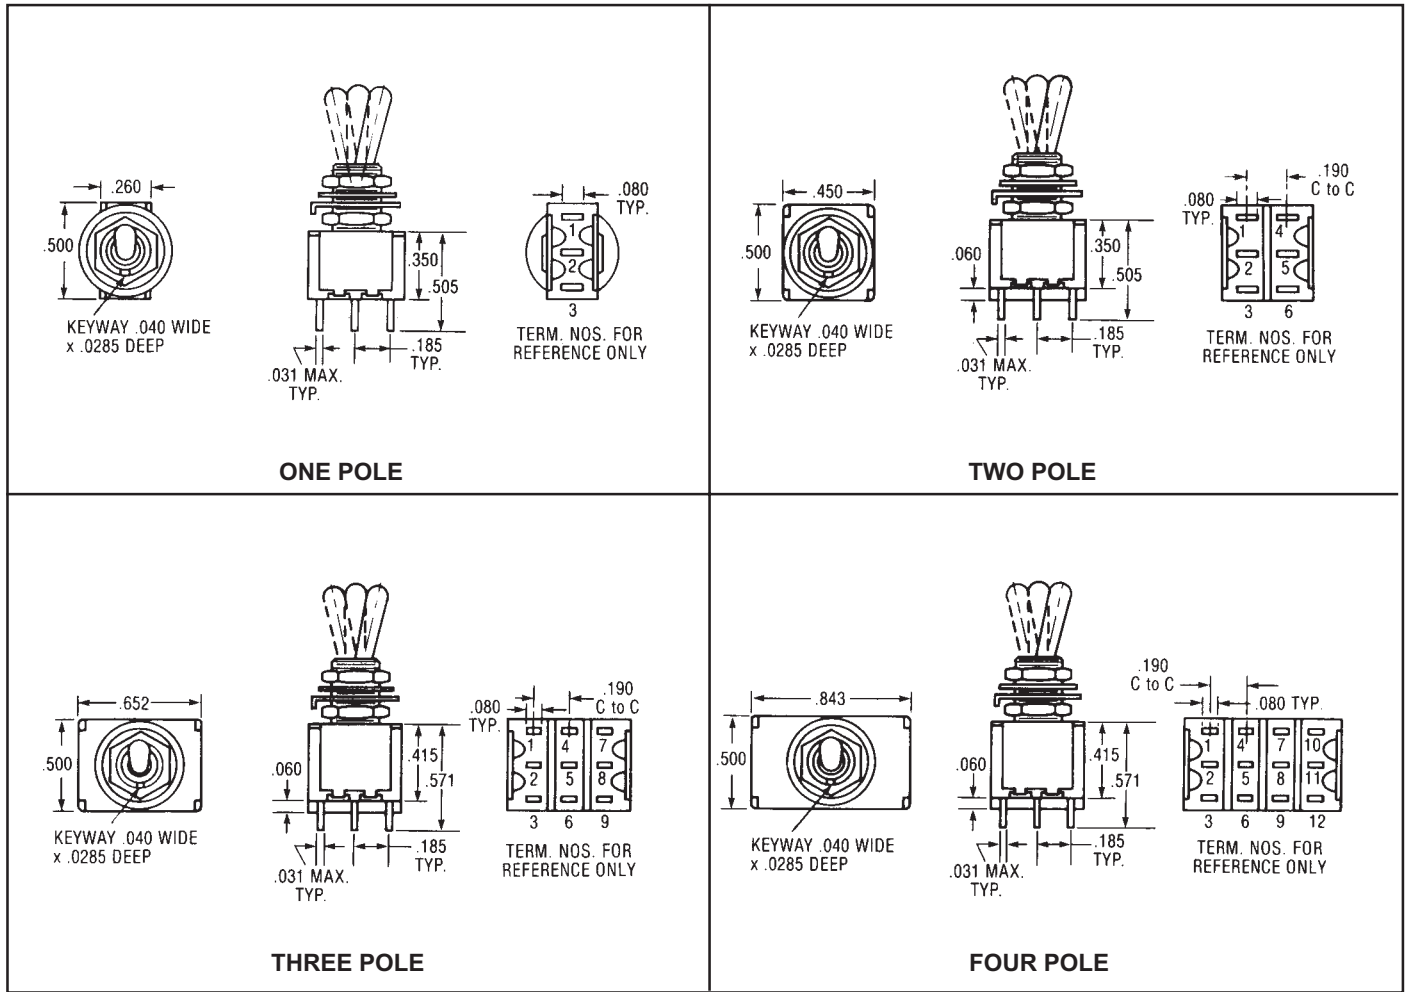

**TOGGLE LEVER OPTIONS**

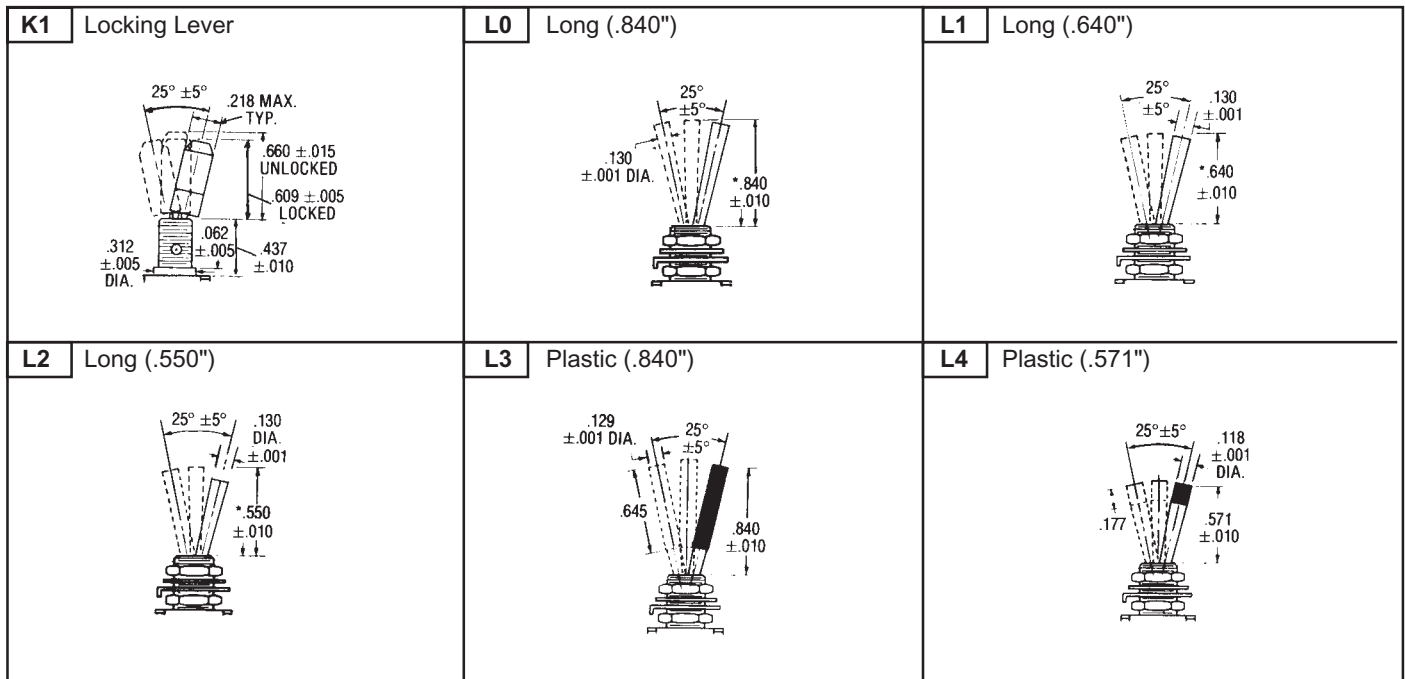

**Toggle Lever Options — Contd.**

<p><b>M</b> Short (.200")</p>	<p><b>P1</b> Flatted (.840")</p>	<p><b>P3</b> Flatted (.448")</p>	<p><b>P4</b> Flatted (.250")</p>
<p><b>S</b> Std. Bat (.410")</p>	<p><b>T</b> Large Toggle</p>	<p><b>T1</b> Large Toggle</p>	

**BUSHING OPTIONS**

<p><b>CW</b> Splashproof Sealed Lever and Panel Seal</p> <p>CW = Flatted bushing</p>	<p><b>D D9</b> Threaded Smooth (No Keyway)</p>	
<p><b>H</b> High Torque Flatted with Shoulder</p>	<p><b>H3</b> High Torque</p>	<p><b>P</b> Anti-Rotation</p>
<p><b>TW</b> Splashproof Sealed Lever and Panel Seal</p>	<p><b>OX Y Y9</b> Threaded with Lever Seal Threaded Smooth (No Keyway)</p>	<p><b>Y5</b> Long Bushing (.437")</p>

**K** Refer to K1 lever drawing for dimensions.


**T&TX** Refer to T or T1 lever drawing for dimensions.

Note: For hardware refer to pages 55-57.


<p><b>C Printed CIRCUIT</b></p>	<p><b>W Wire-Wrap</b></p>	<p><b>W1 Wire-Wrap</b></p>	<p><b>W3 Wire-Wrap</b></p>	<p><b>W4 Wire-Wrap</b></p>	<p><b>Z STANDARD</b></p>	<p><b>Z3 Quick CONNECT</b></p> <p>Mating Receptacle from AMP SPECIAL IND., P.O. Box 984, Paoli, Pa. 19301 Amp P/N single piece 61454 series, strip from 60900</p>
---------------------------------	---------------------------	----------------------------	----------------------------	----------------------------	--------------------------	---

NOTE: Wire-Wrap is a registered trademark of the Gardner-Denver Company.

**TERMINATION/MOUNTING OPTIONS**


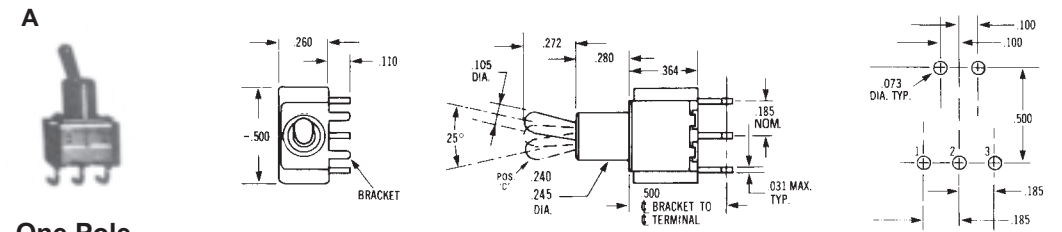


**One Pole**

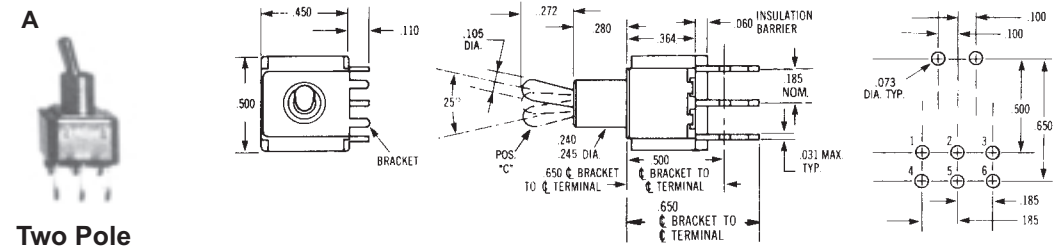


**Two Pole**


**Right Angle P.C. Terminal**

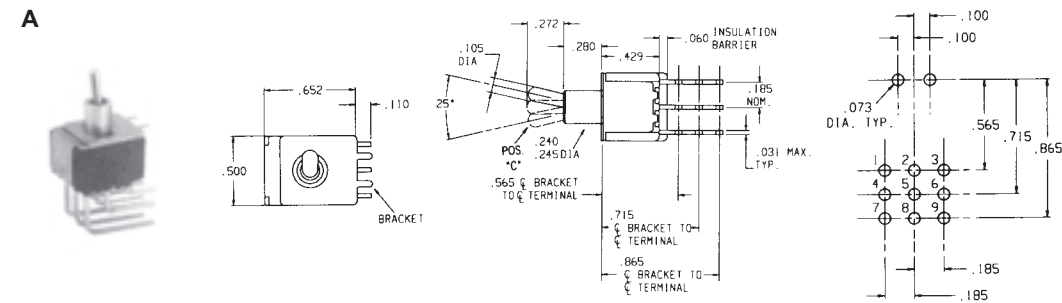

**Three Pole**

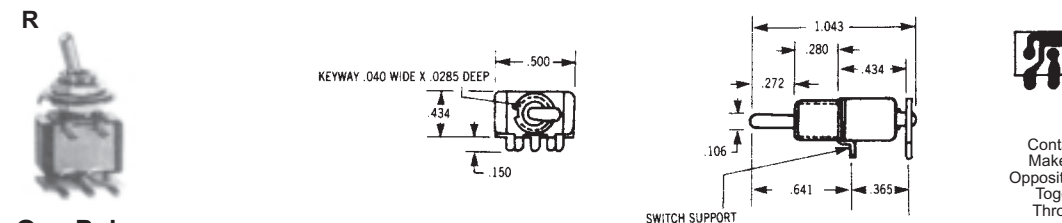




**One Pole**

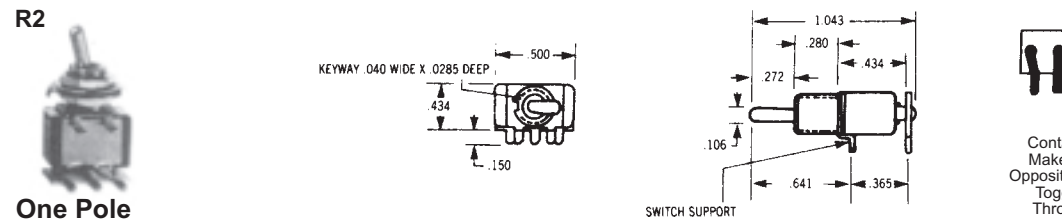

**One Pole**




**Termination/Mounting Options**

<b>AV1</b>	w/.100" terminal spacing
<b>AV2</b>	w/.150" terminal spacing (pictured below)

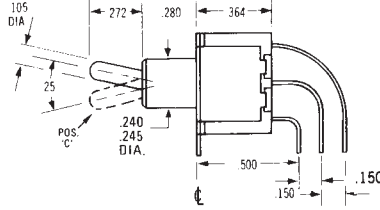




**ONE POLE** Epoxy sealed P.C. terminals are supplied as standard for these options.

<b>AV1</b>	w/.100" terminal spacing
<b>AV2</b>	w/.150" terminal spacing (pictured below)

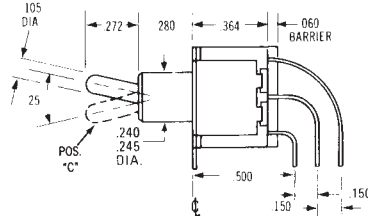




**TWO POLE** Epoxy sealed P.C. terminals are supplied as standard for these options.

<b>AV</b>	w/.100" terminal spacing
<b>AV2</b>	w/.150" terminal spacing (pictured below)

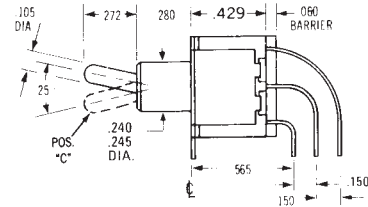

**THREE POLE** Epoxy sealed P.C. terminals are supplied as standard for these options.

<b>AV</b>	w/.100" terminal spacing
<b>AV2</b>	w/.150" terminal spacing (pictured below)

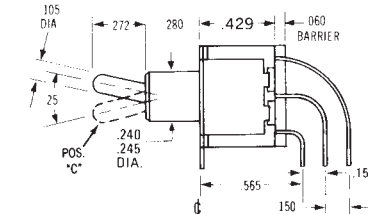

**FOUR POLE** Epoxy sealed P.C. terminals are supplied as standard for these options.

# MINIATURE SWITCHES

## Termination/Mounting Options

**V30**

ONE POLE

TWO POLE

BRACKET WIDTH  
 $.312$  (7.9)  
 $.620$  (15.7)

$25^\circ$   
 $.105$  DIA. (2.6)  
 $.270$  (6.8)  
 $.240$  (6.1) DIA.  
 $.245$  (6.2) DIA.  
 $.280$  (7.1)  
 $.620$  (15.7)

$.270$  (6.8)  
 $.280$  (7.1)  
 $.460$  (11.7)  
 $.184$  (4.6)  
 $.125$  (3.1)  
 $.046$  (1.2)

$.073$  DIA. TYP. (1.8)  
 $.185$  TYP. (4.7)  
 $.125$  (3.1)  
 $.620$  (15.7)

1 Pole P.C. Mounting

$.073$  DIA. TYP. (1.8)  
 $.125$  (3.1)  
 $.190$  (4.8)  
 $.185$  TYP. (4.7)  
 $.620$  (15.7)

2 Pole P.C. Mounting

**EPOXY SEALED P.C. TERMINALS ARE SUPPLIED AS STANDARD FOR THESE OPTIONS**

**V40**

ONE POLE

TWO POLE

BRACKET WIDTH  
 $.312$  (7.9)  
 $.620$  (15.7)

$25^\circ$   
 $.270$  (6.8)  
 $.280$  (7.1)  
 $.240$  (6.1) DIA.  
 $.245$  (6.2) DIA.  
 $.620$  (15.7)  $\phi$  TO  $\phi$

$.105$  DIA. (2.6) +.003  
 $.630$  (16)  
 $.312$  (8)  
 $.184$  (4.6)  
 $.125$  (3.1)  
 $.046$  TYP. (1.2)

$.073$  DIA. TYP. (1.8)  
 $.185$  TYP. (4.7)  
 $.125$  (3.1)  
 $.620$  (15.7)

1 Pole P.C. Mounting

$.073$  DIA. TYP. (1.8)  
 $.125$  (3.1)  
 $.190$  (4.8)  
 $.185$  TYP. (4.7)  
 $.620$  (15.7)

2 Pole P.C. Mounting

**EPOXY SEALED P.C. TERMINALS ARE SUPPLIED AS STANDARD FOR THESE OPTIONS**

**V60**

ONE POLE

TWO POLE

BRACKET WIDTH  
 $.360$  (9.1)  
 $.750$  (19)

$25^\circ$   
 $.105$  DIA. (2.6)  
 $.270$  (6.8)  
 $.240$  (6.1) DIA.  
 $.245$  (6.2) DIA.  
 $.280$  (7.1)  
 $.750$  (19)

$.270$  (6.8)  
 $.280$  (7.1)  
 $.460$  (11.7)  
 $.187$  (4.7)  
 $.250$  (6.3)  
 $.050$  (1.3)

$.073$  DIA. TYP. (1.8)  
 $.185$  TYP. (4.7)  
 $.250$  (6.3)  
 $.750$  (19)

1 Pole P.C. Mounting

$.073$  DIA. TYP. (1.8)  
 $.190$  (4.8)  
 $.250$  (6.3)  
 $.185$  TYP. (4.7)  
 $.750$  (19)

2 Pole P.C. Mounting

**EPOXY SEALED P.C. TERMINALS ARE SUPPLIED AS STANDARD FOR THESE OPTIONS**

**V70**

ONE POLE

TWO POLE

BRACKET WIDTH  
 $.360$  (9.1)  
 $.750$  (19)

$25^\circ$   
 $.270$  (6.8)  
 $.280$  (7.1)  
 $.240$  (6.1) DIA.  
 $.245$  (6.2) DIA.  
 $.750$  (19)  $\phi$  TO  $\phi$

$.105$  DIA. (2.6) +.003  
 $.630$  (16)  
 $.360$  (9.1)  
 $.187$  (4.7)  
 $.250$  (6.3)  
 $.050$  TYP. (1.3)

$.073$  DIA. TYP. (1.8)  
 $.185$  TYP. (4.7)  
 $.250$  (6.3)  
 $.750$  (19)

1 Pole P.C. Mounting

$.073$  DIA. TYP. (1.8)  
 $.190$  (4.8)  
 $.250$  (6.3)  
 $.185$  TYP. (4.7)  
 $.750$  (19)

2 Pole P.C. Mounting

**EPOXY SEALED P.C. TERMINALS ARE SUPPLIED AS STANDARD FOR THESE OPTIONS**

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.