


# PVC6Q503C01B00 Datasheet

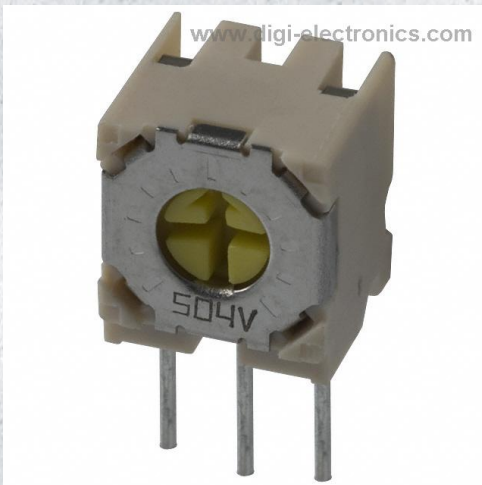

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	PVC6Q503C01B00-DG
Manufacturer	<a href="#">Bourns Inc.</a>
Manufacturer Product Number	PVC6Q503C01B00
Description	TRIMMER 50K OHM 0.5W PC PIN SIDE
Detailed Description	50 kOhms 0.5W, 1/2W PC Pins Through Hole Trimmer Potentiometer Ceramic 1.0 Turn Side Adjustment

This model PVC6Q503C01B00 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

PVC6Q503C01B00

Series:

PVC6

Resistance:

50 kOhms

Tolerance:

±10%

Number of Turns:

1

Resistive Material:

Ceramic

Termination Style:

PC Pins

Base Product Number:

PVC6Q

Manufacturer:

Bourns Inc.

Product Status:

Obsolete

Power (Watts):

0.5W, 1/2W

Temperature Coefficient:

±100ppm/°C

Adjustment Type:

Side Adjustment

Mounting Type:

Through Hole

Size / Dimension:

Rectangular - 0.315" x 0.272" Face (8.00mm x 6.90mm)

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8533.40.8070

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.