

# BC857AM3-TP Datasheet

[www.digi-electronics.com](http://www.digi-electronics.com)



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	BC857AM3-TP-DG
Manufacturer	<a href="#">Micro Commercial Co</a>
Manufacturer Product Number	BC857AM3-TP
Description	Interface
Detailed Description	Bipolar (BJT) Transistor PNP 50 V 100 mA 100MHz 2 65 mW Surface Mount SOT-723



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.



## Purchase and inquiry

Manufacturer Product Number:

BC857AM3-TP

Series:

-

Transistor Type:

PNP

Voltage - Collector Emitter Breakdown (Max):

50 V

Current - Collector Cutoff (Max):

1mA

Power - Max:

265 mW

Operating Temperature:

-55°C ~ 150°C

Package / Case:

SOT-723

Base Product Number:

BC857

Manufacturer:

Micro Commercial Co

Product Status:

Active

Current - Collector (Ic) (Max):

100 mA

Vce Saturation (Max) @ Ib, Ic:

650mV @ 5mA, 100mA

DC Current Gain (hFE) (Min) @ Ic, Vce:

110 @ 2mA, 5V

Frequency - Transition:

100MHz

Mounting Type:

Surface Mount

Supplier Device Package:

SOT-723

## Environmental & Export classification

REACH Status:

REACH Unaffected

HTSUS:

8541.21.0075

ECCN:

EAR99

## Features

- Halogen Free. "Green" Device (Note 1)
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant ("P" Suffix Designates RoHS Compliant. See Ordering Information)

## Maximum Ratings @ 25°C Unless Otherwise Specified


- Operating Junction Temperature Range: -55°C to +150°C
- Storage Temperature Range: -55°C to +150°C
- Maximum Thermal Resistance: 472°C/W Junction to Ambient<sup>(Note 2)</sup>

Parameter	Symbol	Rating	Unit
Collector-Base Voltage BC856AM3,BC856BM3 BC857AM3,BC857BM3,BC857CM3 BC858AM3,BC858BM3,BC858CM3	$V_{CBO}$	-80 -50 -30	V
Collector-Emitter Voltage BC856AM3,BC856BM3 BC857AM3,BC857BM3,BC857CM3 BC858AM3,BC858BM3,BC858CM3	$V_{CEO}$	-65 -45 -30	V
Emitter-Base Voltage	$V_{EBO}$	-5	V
Collector Current	$I_C$	-100	mA
Collector Power Dissipation@ $T_A=25^\circ\text{C}$ <sup>(Note2)</sup>	$P_C$	265	mW

Note: 1. Halogen free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

Note:2. Device Mounted on FR-5: 1.0 X 0.75 X 0.062 inch

## Internal Structure




### Marking:

BC856AM3:3A; BC856BM3:3B;  
BC857AM3:3E; BC857BM3:3F; BC857CM3:3G;  
BC858AM3:3J; BC858BM3:3K; BC858CM3:3L;

# PNP Plastic-Encapsulate Transistors


## SOT-723

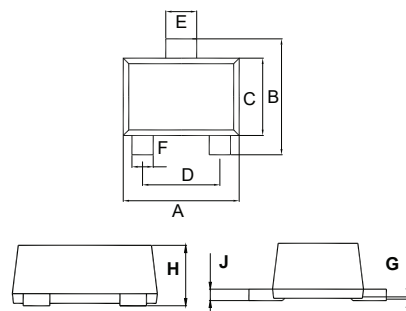

### DIMENSIONS

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.043	0.051	1.10	1.30	
B	0.043	0.051	1.10	1.30	
C	0.028	0.035	0.70	0.90	
D	0.031		0.80		TYP.
E	0.009	0.017	0.22	0.42	
F	0.005	0.013	0.12	0.32	
G	0.000	0.002	0.00	0.05	
H	0.017	0.021	0.43	0.54	
J	0.003	0.006	0.08	0.15	

### Suggested Solder Pad Layout

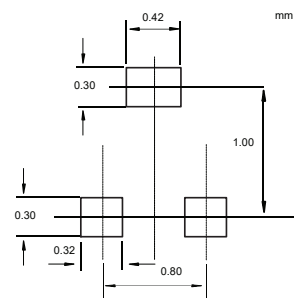

Electrical Characteristics @  $T_A=25^\circ\text{C}$  Unless Otherwise Specified

Parameter	Symbol	Min	Typ	Max	Units	Conditions
Collector-Base Breakdown Voltage BC856AM3,BC856BM3 BC857AM3,BC857BM3,BC857CM3 BC858AM3,BC858BM3,BC858CM3	$V_{(BR)CBO}$	-80 -50 -30			V	$I_C=-10\mu\text{A}, I_E=0$
Collector-Emitter Breakdown Voltage BC856AM3,BC856BM3 BC857AM3,BC857BM3,BC857CM3 BC858AM3,BC858BM3,BC858CM3	$V_{(BR)CEO}$	-65 -45 -30			V	$I_C=-10\text{mA}, I_B=0$
Emitter-Base Breakdown Voltage BC856AM3,BC856BM3 BC857AM3,BC857BM3,BC857CM3 BC858AM3,BC858BM3,BC858CM3	$V_{(BR)EBO}$	-5 -5 -5			V	$I_E=-1\mu\text{A}, I_C=0$
Collector Cut-off Current	$I_{CBO}$			-15	nA	$V_{CB}=-30\text{V}, I_E=0$
Emitter Cutoff Current	$I_{EBO}$			-100	nA	$V_{EB}=-5\text{V}, I_C=0$
Emitter Cutoff Current	$I_{CEO}$			-1	mA	$V_{CE}=-30\text{V}, I_B=0$
DC Current Gain BC856AM3/BC857AM3/BC858AM3 BC856BM3/BC857BM3/BC858BM3 BC857CM3/BC858CM3	$h_{FE}$	110 200 420		220 450 800		$V_{CE}=-5\text{V}, I_C=-2\text{mA}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$			-0.3 -0.65	V	$I_C=-10\text{mA}, I_B=-0.5\text{mA}$ $I_C=-100\text{mA}, I_B=-5\text{mA}$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		-0.7 -0.85		V	$I_C=-10\text{mA}, I_B=-0.5\text{mA}$ $I_C=-100\text{mA}, I_B=-5\text{mA}$
Base-Emitter On Voltage	$V_{BE(on)}$		-0.65	-0.75 -0.82	V	$V_{CE}=-5\text{V}, I_C=-2\text{mA}$ $V_{CE}=-5\text{V}, I_C=-10\text{mA}$
Transition Frequency	$f_T$	100			MHz	$V_{CE}=-5\text{V}, I_C=-10\text{mA}, f=100\text{MHz}$

### Curve Characteristics

Fig. 1 - Static Characteristics

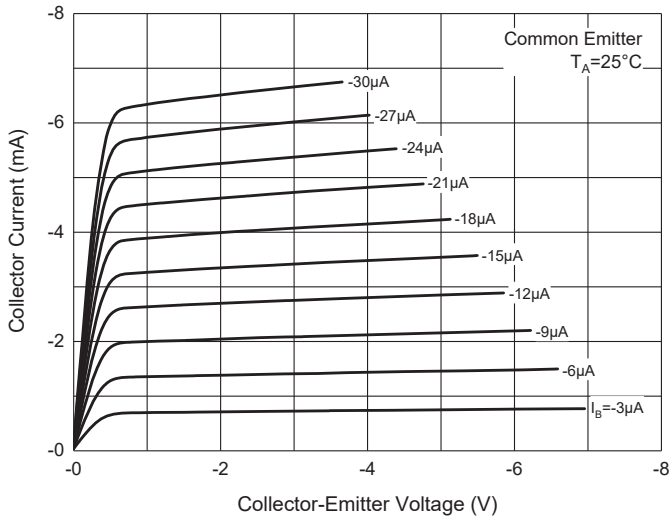


Fig. 2 - DC Current Gain Characteristics

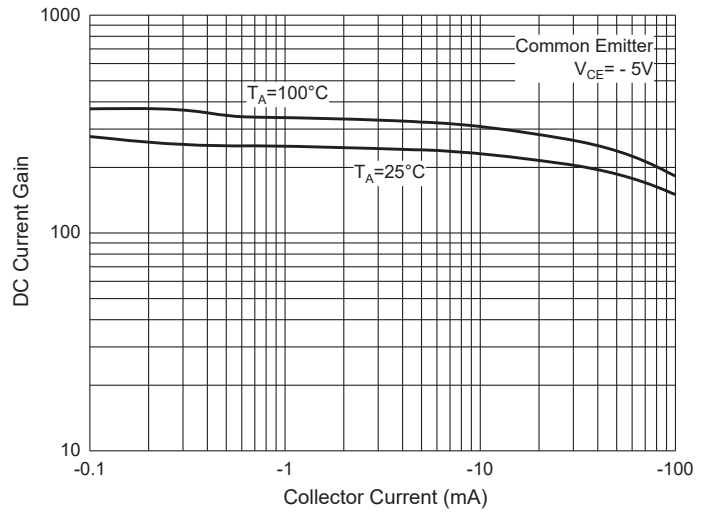


Fig. 3 - Collector-Emitter Saturation Voltage Characteristics

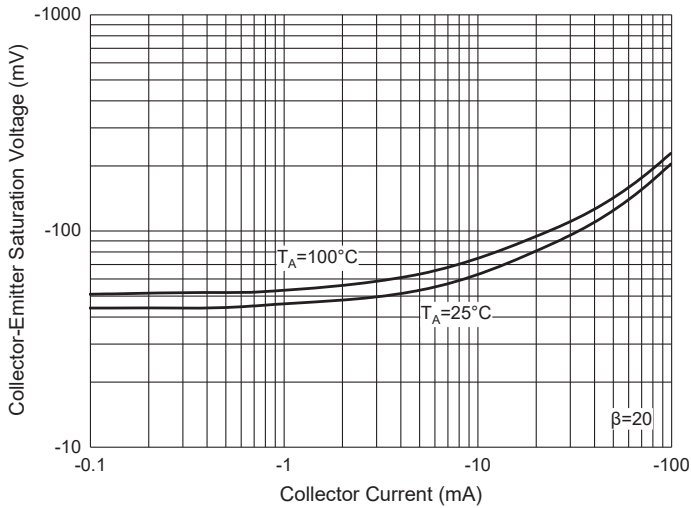


Fig. 4 - Base-Emitter Saturation Voltage Characteristics

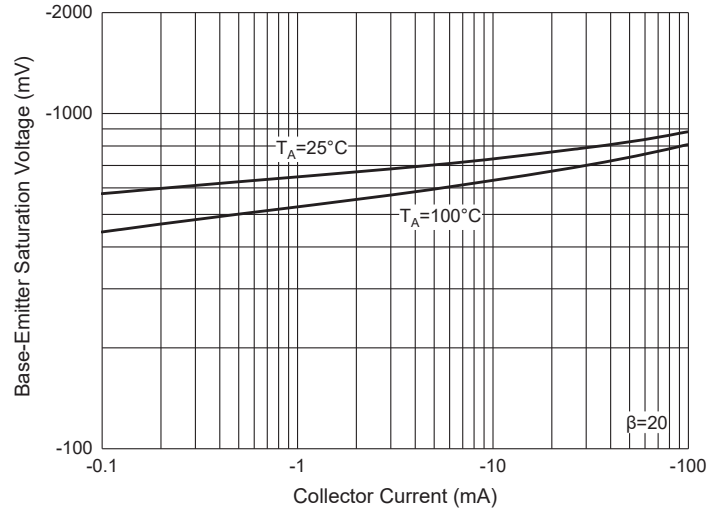


Fig. 5 - Base-Emitter Voltage Characteristics


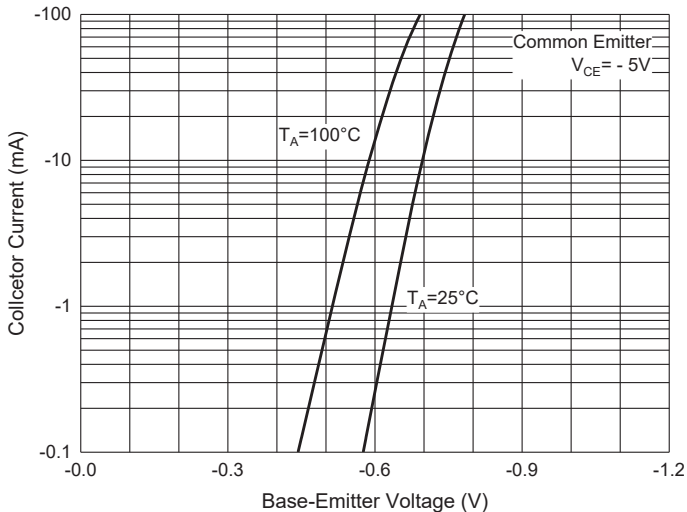


Fig. 6 - Power Derating Curve

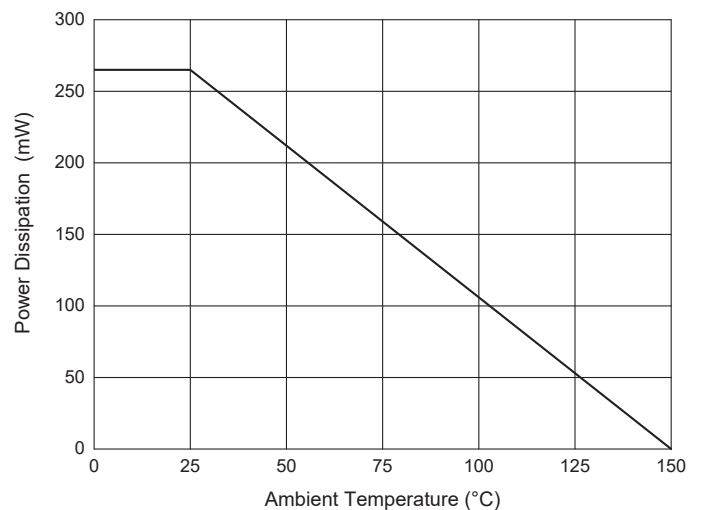

## Ordering Information

Device	Packing
Part Number-TP	Tape&Reel: 8Kpcs/Reel

### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages. **Micro Commercial Components Corp.** products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.mccsemi.com/Home/TermsAndConditions>.

### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.



## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.