


MPS2907A-H-BP Datasheet

www.digi-electronics.com

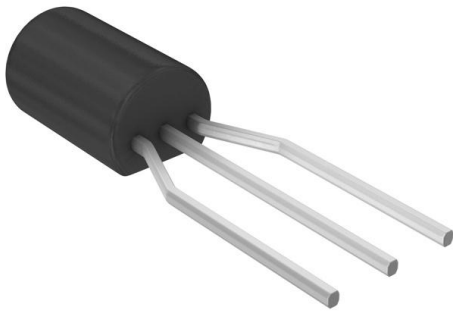

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	MPS2907A-H-BP-DG
Manufacturer	Micro Commercial Co
Manufacturer Product Number	MPS2907A-H-BP
Description	TRANS PNP 60V 0.6A TO92
Detailed Description	Bipolar (BJT) Transistor PNP 60 V 600 mA 200MHz 6 25 mW Through Hole TO-92

This model MPS2907A-H-BP is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

MPS2907A-H-BP

Series:

-

Transistor Type:

PNP

Voltage - Collector Emitter Breakdown (Max):

60 V

Current - Collector Cutoff (Max):

50nA

Power - Max:

625 mW

Operating Temperature:

-55°C ~ 150°C (TJ)

Package / Case:

TO-226-3, TO-92-3 (TO-226AA)

Base Product Number:

MPS2907

Manufacturer:

Micro Commercial Co

Product Status:

Obsolete

Current - Collector (Ic) (Max):

600 mA

Vce Saturation (Max) @ Ib, Ic:

600mV @ 50mA, 500mA

DC Current Gain (hFE) (Min) @ Ic, Vce:

200 @ 150mA, 10V

Frequency - Transition:

200MHz

Mounting Type:

Through Hole

Supplier Device Package:

TO-92

Environmental & Export classification

RoHS Status:

RoHS Compliant

ECCN:

EAR99

Moisture Sensitivity Level (MSL):

1 (Unlimited)

HTSUS:

8541.21.0075

M.C.C.

Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311Phone: (818) 701-4933
Fax: (818) 701-4939**MPS2907-L/H**
MPS2907A-L/H**PNP Silicon**
Plastic-Encapsulate
Transistor**Features**

- Capable of 0.625Watts of Power Dissipation.
- Collector-current -0.6A
- Collector-base Voltage -60V
- Operating and storage junction temperature range: -55°C to +150°C
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Marking: MPS2907/MPS2907A
- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
- Halogen free available upon request by adding suffix "-HF"

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------

OFF CHARACTERISTICS


$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=-10\text{mA}$, $I_B=0$)	MPS2907 -40 MPS2907A -60	---	Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=-10\mu\text{A}$, $I_E=0$)	-60	---	Vdc
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ($I_E=-10\mu\text{A}$, $I_C=0$)	-5.0	---	Adc
I_{CBO}	Collector Cutoff Current ($V_{CB}=-50\text{Vdc}$, $I_E=0$)	---	-0.1 -0.01	μA
I_{CEO}	Collector Cutoff Current ($V_{CE}=-35\text{Vdc}$, $I_E=0$)	---	-0.1 -0.05	Vdc
I_{EBO}	Emitter Cutoff Current ($V_{EB}=-3.0\text{Vdc}$, $I_C=0$)	---	-0.1 -0.01	μA

ON CHARACTERISTICS

h_{FE-1}	DC Current Gain ($I_C=-150\text{mA}$, $V_{CE}=-10\text{Vdc}$)	100	300	---
h_{FE-2}	DC Current Gain ($I_C=-1.0\text{mA}$, $V_{CE}=-10\text{Vdc}$)	MPS2907 60	---	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=500\text{mA}$, $I_B=50\text{mA}$)	---	-0.6	Vdc
$V_{(BE)sat}$	Base-Emitter Saturation Voltage ($I_C=500\text{mA}$, $I_B=50\text{mA}$)	---	-1.2	Vdc
f_T	Transition Frequency ($V_{CE}=-20\text{Vdc}$, $I_C=50\text{mA}$, $f=100\text{MHz}$)	200	---	MHz

CLASSIFICATION OF h_{FE}

Rank	L	H
Range	100-200	200-300

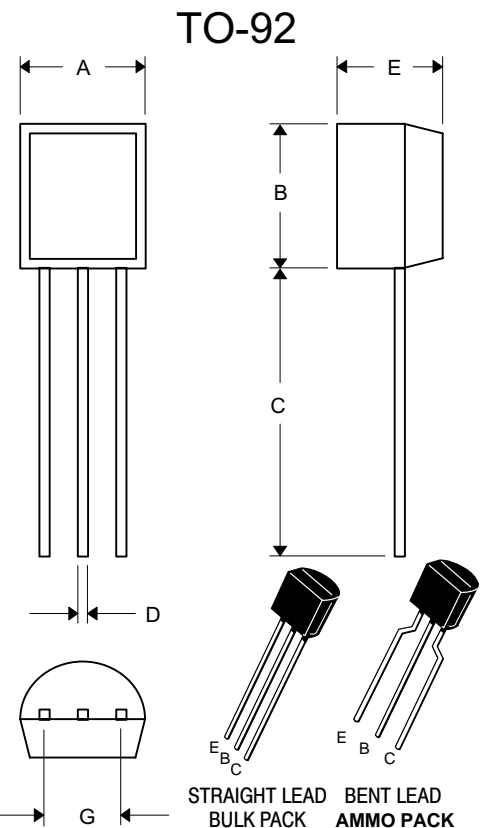

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.175	.185	4.45	4.70	
B	.175	.185	4.45	4.70	
C	.500	---	12.70	---	
D	.016	.020	0.41	0.63	
E	.135	.145	3.43	3.68	
G	.095	.105	2.42	2.67	Straight Lead
	.173	.220	4.40	5.60	Bent Lead

* For ammo packing detailed specification, click here to visit our website of product packaging for details.



Ordering Information :

Device	Packing
Part Number-AP	Ammo Packing: 20Kpcs/Carton
Part Number-BP	Bulk: 100Kpcs/Carton

Note : Adding "-HF" suffix for halogen free, eg. Part Number-AP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.