

# AIUR-03-3R3M Datasheet



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	AIUR-03-3R3M-DG
Manufacturer	<a href="#">Abracon LLC</a>
Manufacturer Product Number	AIUR-03-3R3M
Description	FIXED IND 3.3UH 2.9A 25 MOHM TH
Detailed Description	3.3 $\mu$ H Unshielded Drum Core, Wirewound Inductor 2.9 A 25mOhm Max Radial, Vertical Cylinder



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

AIUR-03-3R3M

Series:

AIUR-03

Type:

Drum Core, Wirewound

Inductance:

3.3  $\mu$ H

Current Rating (Amps):

2.9 A

Shielding:

Unshielded

Q @ Freq:

20 @ 7.96MHz

Ratings:

-

Inductance Frequency - Test:

7.96 MHz

Package / Case:

Radial, Vertical Cylinder

Size / Dimension:

0.354" Dia (9.00mm)

Manufacturer:

Abracon LLC

Product Status:

Active

Material - Core:

Ferrite

Tolerance:

$\pm$ 20%

Current - Saturation (Isat):

5.5A

DC Resistance (DCR):

25mOhm Max

Frequency - Self Resonant:

79MHz

Operating Temperature:

-25°C ~ 85°C

Mounting Type:

Through Hole

Supplier Device Package:

-

Height - Seated (Max):

0.472" (12.00mm)

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8504.50.4000

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

# Mini Drum Core Inductor

AIUR-03 Series



RoHS/RoHS II Compliant

12.0 x  $\phi$ 9.0 mm

## FEATURES:

- Ferrite core with heat shrink tube
- High Reliability

## APPLICATIONS:

- Electronic Appliance
- Automotive system

## STANDARD SPECIFICATIONS:

### PARAMETERS

ABRACON P/N:	AIUR-03 Series
Operating temperature:	-25°C to + 85°C
Storage temperature:	-25°C to + 125°C

Part Number	Inductance	Tolerance	Q (Min)	Test Frequency	DCR (Max)	Saturation Current (Max)	Temperature Rise Current (Max)	SRF (Min)	Inductance Code
Units	$\mu$ H	%		MHz	$\Omega$	A	A	MHz	
Symbol	L	J, K, M			DCR	Isat	I <sub>DC</sub>		
AIUR-03-1R0	1.0	M	20	7.96	0.013	10.0	3.5	150	1R0M
AIUR-03-1R5	1.5	M	20	7.96	0.016	8.5	3.3	130	1R5M
AIUR-03-2R2	2.2	M	20	7.96	0.021	6.5	3.2	100	2R2M
AIUR-03-3R3	3.3	M	20	7.96	0.025	5.5	2.9	79	3R3M
AIUR-03-4R7	4.7	M	20	7.96	0.030	4.3	2.5	51	4R7M
AIUR-03-6R8	6.8	M	20	7.96	0.035	3.7	2.3	29	6R8M
AIUR-03-100	10	J, K	50	2.52	0.045	3.0	2.0	14	100J/100K
AIUR-03-120	12	J, K	50	2.52	0.050	2.7	1.9	13	120J/120K
AIUR-03-150	15	J, K	50	2.52	0.056	2.3	1.8	12	150J/150K
AIUR-03-180	18	J, K	40	2.52	0.061	2.2	1.6	11	180J/180K
AIUR-03-220	22	J, K	40	2.52	0.070	2.0	1.4	9.2	220J/220K
AIUR-03-270	27	J, K	40	2.52	0.080	1.7	1.3	8.5	270J/270K
AIUR-03-330	33	J, K	30	2.52	0.090	1.6	1.1	7.8	330J/330K
AIUR-03-390	39	J, K	30	2.52	0.10	1.5	1.1	6.9	390J/390K
AIUR-03-470	47	J, K	30	2.52	0.16	1.4	0.99	6.5	470J/470K
AIUR-03-560	56	J, K	30	2.52	0.18	1.3	0.90	5.4	560J/560K
AIUR-03-680	68	J, K	30	2.52	0.21	1.2	0.81	4.9	680J/680K
AIUR-03-820	82	J, K	30	2.52	0.23	1.1	0.76	4.1	820J/820K
AIUR-03-101	100	J, K	20	0.796	0.28	0.91	0.72	3.7	101J/101K
AIUR-03-121	120	J, K	20	0.796	0.32	0.84	0.67	3.4	121J/121K
AIUR-03-151	150	J, K	20	0.796	0.37	0.75	0.61	3.2	151J/151K
AIUR-03-181	180	J, K	20	0.796	0.58	0.69	0.54	2.8	181J/181K
AIUR-03-221	220	J, K	20	0.796	0.65	0.64	0.50	2.7	221J/221K
AIUR-03-331	330	J, K	20	0.796	0.85	0.54	0.39	2.3	331J/331K
AIUR-03-391	390	J, K	20	0.796	1.00	0.48	0.37	2.1	391J/391K
AIUR-03-471	470	J, K	20	0.796	1.10	0.46	0.32	1.9	471J/471K
AIUR-03-561	560	J, K	20	0.796	1.40	0.41	0.30	1.8	561J/561K
AIUR-03-681	680	J, K	20	0.796	1.60	0.38	0.27	1.6	681J/681K
AIUR-03-821	820	J, K	20	0.796	1.80	0.35	0.24	1.5	821J/821K
AIUR-03-102	1000	J, K	50	0.252	2.90	0.29	0.22	1.3	102J/102K

## Test Conditions and equipments

DCR: QuadTech Milliohmmeter

Isat: 10% inductance drops from initial value

I<sub>DC</sub>: The DC current at which the temperature rise is 40°C max

# Mini Drum Core Inductor

AIUR-03 Series



RoHS  
Compliant



12.0 x  $\phi$ 9.0 mm


## OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

AIUR-03-

Inductance Code	Tolerance
Please refer to the Electrical Spec Table	J: $\pm 5\%$
	K: $\pm 10\%$
	M: $\pm 20\%$

## OUTLINE DRAWING:

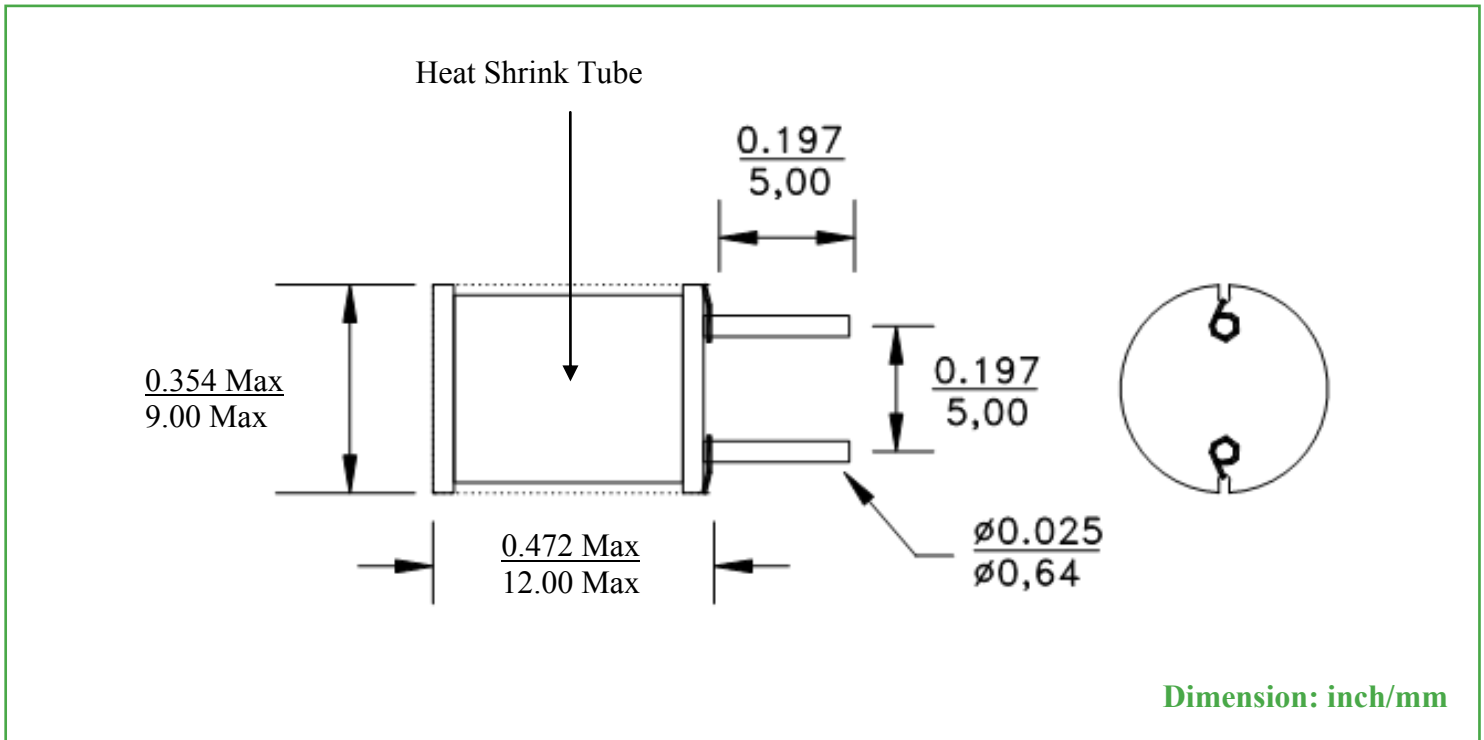

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
ISO 9001:2008  
CERTIFIED



Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale **Revised: 04.24.13**  
30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-800 | [www.abracon.com](http://www.abracon.com)

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.