

# ETQ-P6F3R2HFA Datasheet

[www.digi-electronics.com](http://www.digi-electronics.com)



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	ETQ-P6F3R2HFA-DG
Manufacturer	<a href="#">Panasonic Electronic Components</a>
Manufacturer Product Number	ETQ-P6F3R2HFA
Description	FIXED IND 3.2UH 10.8A 4.92 MOHM
Detailed Description	3.2 $\mu$ H Shielded Inductor 10.8 A 4.92mOhm Max 2-SMD, J-Lead



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

ETQ-P6F3R2HFA

Series:

PCC-F126F (N6)

Type:

-

Inductance:

3.2  $\mu$ H

Current Rating (Amps):

10.8 A

Shielding:

Shielded

Q @ Freq:

-

Ratings:

-

Inductance Frequency - Test:

100 kHz

Package / Case:

2-SMD, J-Lead

Size / Dimension:

0.492" L x 0.492" W (12.50mm x 12.50mm)

Base Product Number:

ETQ-P6

Manufacturer:

Panasonic Electronic Components

Product Status:

Obsolete

Material - Core:

Ferrite

Tolerance:

$\pm$ 25%

Current - Saturation (Isat):

8.6A

DC Resistance (DCR):

4.92mOhm Max

Frequency - Self Resonant:

-

Operating Temperature:

-

Mounting Type:

Surface Mount

Supplier Device Package:

-

Height - Seated (Max):

0.224" (5.70mm)

## Environmental & Export classification

Moisture Sensitivity Level (MSL):

1 (Unlimited)

HTSUS:

8504.50.4000

ECCN:

EAR99

Power Choke Coil

Discontinued

Series: **PCC-F126F (N6)**

Thin, compact and high power



### ■ Features

- High power (I<sub>sat</sub> 20 A /100 °C)
- Thin profile (5.7 mm height)/SMD
- Low leakage flux
- RoHS compliant


### ■ Recommended Applications

- DC-DC converter for driving PCs at high speed
- On-board power supply module for DC-DC converters (10 to 40 W)

### ■ Standard Packing Quantity

- 500 pcs./Reel

### ■ Explanation of Part Numbers

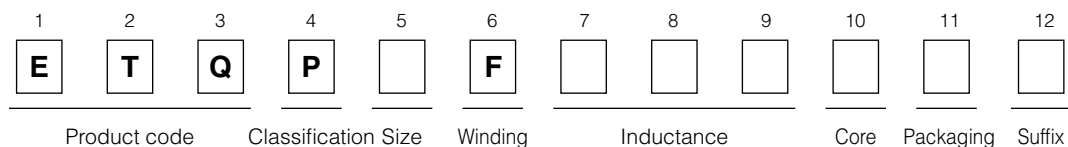

### ■ Standard Parts


Parts No.	Type	Initial inductance at 25 °C		Inductance at flat point at 25 °C		Saturation current		Heat current $\Delta T=40$ °C	DC resistance at 20 °C
		L <sub>0</sub> (μH)	Tol. (%)	L <sub>1</sub> (μH)	Tol. (%)	I sat at 25 °C	I sat at 100 °C		
						min.	min.	I <sub>0</sub> (A)	R <sub>DC</sub> (mΩ)
ETQP6F1R2HFA	HL	2.3	±30	1.2	±30	14.3	11.7	14.2	2.24
ETQP6F2R0HFA		3.5		2.0		10.7	8.7	12.5	3.30
ETQP6F3R2HFA		4.8	±25	3.2	±25	8.6	7.1	10.8	4.92
ETQP6F4R6HFA		6.6		4.6		7.3	6.0	9.3	6.48
ETQP6F6R4HFA		8.3		6.4		6.2	5.2	7.9	8.64
ETQP6F8R2HFA		10.4		8.2		6.0	5.0	7.2	10.90
ETQP6F102HFA		12.5		10.2		4.7	4.0	6.5	13.30
ETQP6F1R0SFA	SP	1.9	±30	1.0	±30	19.4	15.4	14.2	2.24
ETQP6F1R6SFA		2.8		1.6		14.9	12.2	12.5	3.30
ETQP6F2R5SFA		3.6		2.5		11.3	9.3	10.8	4.92
ETQP6F3R5SFA		4.9		3.5		9.5	8.0	9.3	6.48
ETQP6F0R8LFA	LB	1.8	±30	0.8	±30	25.2	20.0	14.2	2.24
ETQP6F1R3LFA		2.5		1.3		18.6	15.8	12.5	3.30
ETQP6F2R0LFA		3.1		2.0		15.1	12.1	10.8	4.92
ETQP6F2R9LFA		4.1		2.9		12.0	10.0	9.3	6.48
ETQP6F4R1LFA		5.0		4.1		10.8	8.7	7.9	8.64

(Note1) Inductance is measured at 100 kHz

(Note2) For definitions of L<sub>0</sub> & L<sub>1</sub> please see the next page(Note3) Saturation current (I<sub>sat</sub>) is the current value that inductance (L<sub>1</sub>) decreases to 80 % of initial value.(Note4) Heat current (I<sub>0</sub>) is the actual value of the current at which the temperature rise of the coil becomes 40 dc from its initial (ambient temperature) value. The case temperature of the power choke coil is determined by the ambient temperature plus the heat generated by the operating current.


■ Figure 1:  $L_0, L_1$ : Definition

DC Bias Characteristic

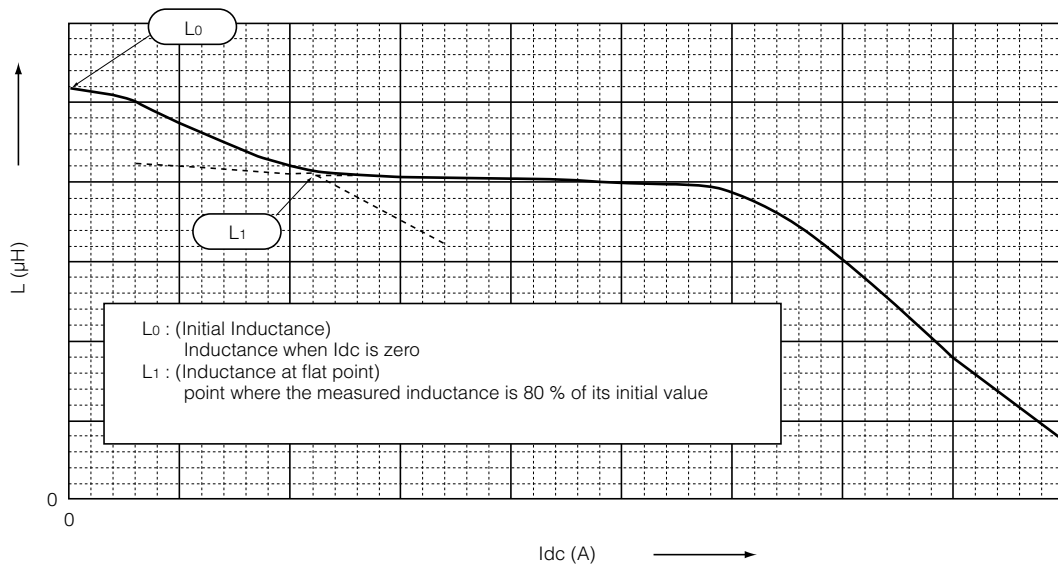

■ Figure 2: Dimensions in mm (not to scale)

■ Recommended Land Pattern in mm (not to scale)

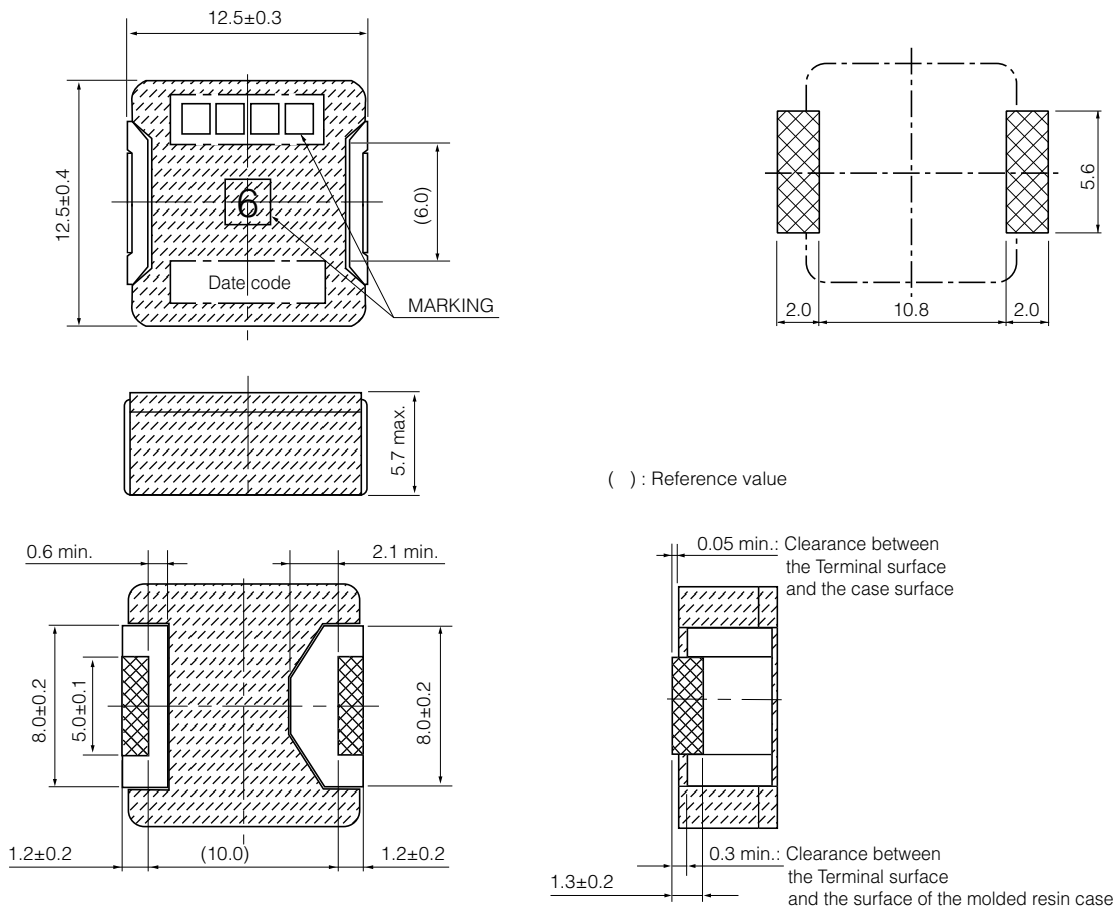


■ Packaging Methods, Soldering Conditions and Safety Precautions (Power Choke Coils for Consumer use)

Please see Data Files

■ Packaging Methods (Taping)

● Embossed Carrier Tape Dimensions in mm (not to scale)

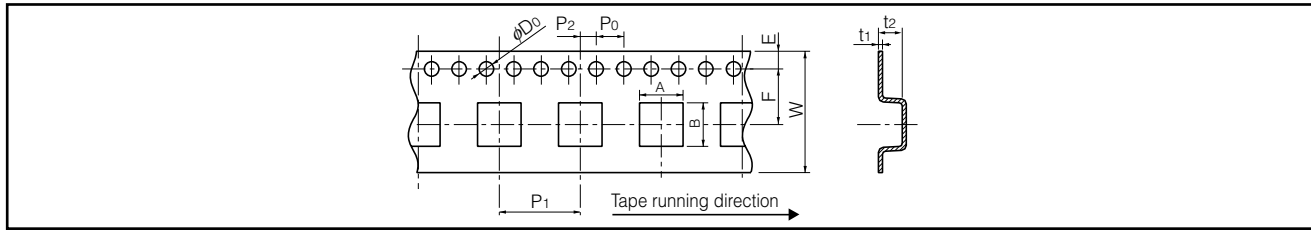


Power Choke Coils for high reliability use

Series	A	B	W	E	F	P <sub>1</sub>	P <sub>2</sub>	P <sub>0</sub>	$\phi D_0$	t <sub>1</sub>	t <sub>2</sub>
PCC-M0530M	5.6	6.1	16.0	1.75	7.5	12.0	2.0	4.0	1.5	0.4	3.3
PCC-M0540M											4.3
PCC-M0630M	7.1	6.6									3.3
PCC-M0645M											5.0
PCC-M0754M	8.1	7.6									6.0
PCC-M0854M/M0850M	9.1	8.6									
PCC-M1054M/M1050M PCC-M1050ML/M1060ML	10.7	11.9	24.0		11.5	16.0				0.5	6.3

Power Choke Coils for consumer use

Series	A	B	W	E	F	P <sub>1</sub>	P <sub>2</sub>	P <sub>0</sub>	$\phi D_0$	t <sub>1</sub>	t <sub>2</sub>
PCC-M0512W	5.6	5.85	12.0	1.75	5.5	8.0	2.0	4.0	1.5	0.4	1.4
PCC-M0630L	7.1	8.0			7.5						12.0
PCC-M0630W	7.2	7.5	7.5		12.0	3.3					
PCC-M0730L	7.6	8.9	7.5		12.0	4.2					
PCC-M074L	7.6	8.9	7.5		12.0	4.3					
PCC-M104W	10.6	11.0	7.5		12.0	5.2					
PCC-M104L	10.6	11.8	7.5	12.0	5.3						
PCC-M125L	13.1	14.8	7.5	12.0	5.3						
PCC-D124H	13.5	13.5	24.0	11.5	16.0	16.0	2.0	4.0	1.5	0.4	5.2
PCC-D125H											5.2
PCC-D126H											6.2
PCC-D126F											6.0
PCC-F126F	13.0	13.0									6.0

● Taping Reel Dimensions in mm (not to scale)

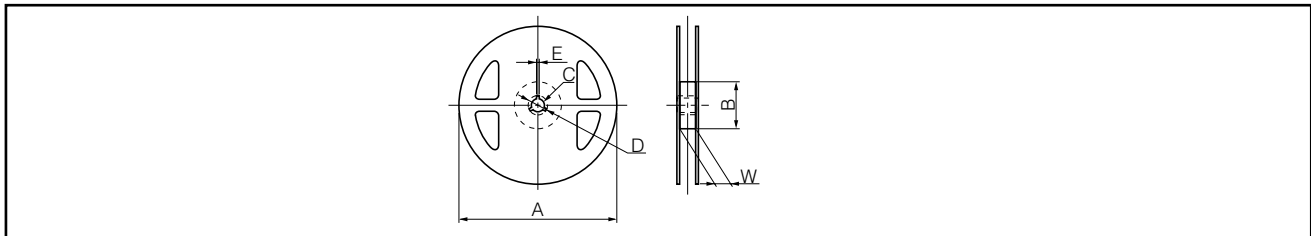

Power Choke Coils for high reliability use

Series	A	B	C	D	E	W
PCC-M0530M/M0540M PCC-M0630M/M0645M PCC-M0754M PCC-M0854M/M0850M	330	100	13	21	2	17.5
PCC-M1054M/M1050M PCC-M1050ML/M1060ML						25.5


Power Choke Coils for consumer use

Series	A	B	C	D	E	W
PCC-M0512W	330	(80)	13	21	2	13.5
PCC-M0630L/M0630W		17.5				
PCC-M104W		25.5				
PCC-M0730L/M074L PCC-M104L	380	80	13	21	2	17.5
PCC-M125L/D124H/D125H/ D126H/D126F/F126F						25.4


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Component Placement (Taping)

● Power Choke Coils for high reliability use

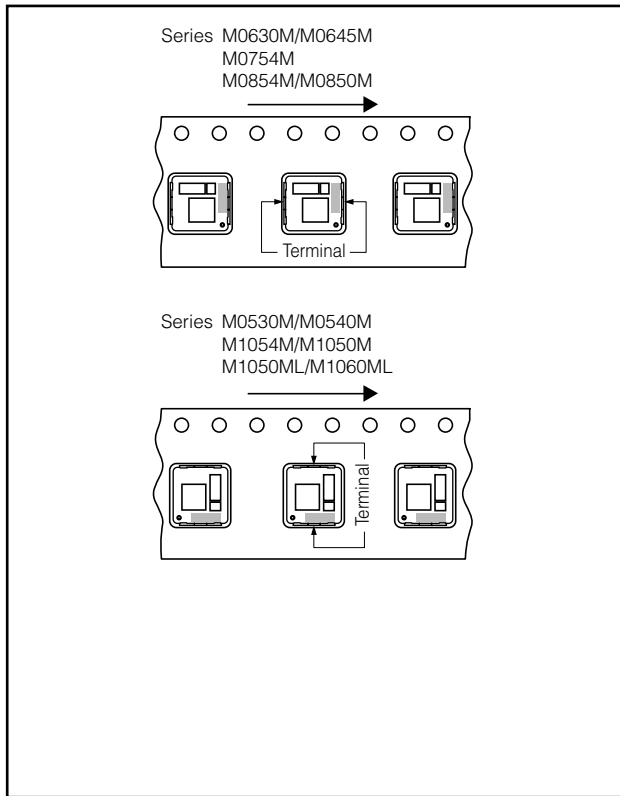

● Power Choke Coils for consumer use

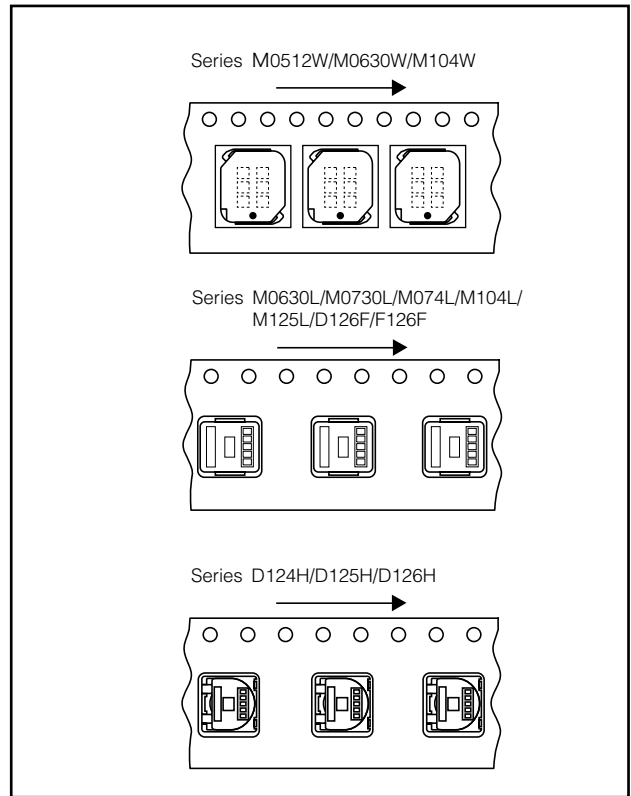

■ Standard Packing Quantity/Reel

● Power Choke Coils for high reliability use

Series	Minimum Quantity / Packing Unit	Quantity per reel
PCC-M0530M/M0540M	2000 pcs. / box (2 reel)	1000 pcs.
PCC-M0630M		
PCC-M0645M	1000 pcs. / box (2 reel)	500 pcs.
PCC-M0754M		
PCC-M0854M/M0850M		
PCC-M1054M/M1050M		
PCC-M1050ML/M1060ML		


● Power Choke Coils for consumer use

Series	Minimum Quantity / Packing Unit	Quantity per reel
PCC-M0512W	6000 pcs. / box (2 reel)	3000 pcs.
PCC-M0730L	3000 pcs. / box (2 reel)	1500 pcs.
PCC-M074L		
PCC-M0630L	2000 pcs. / box (2 reel)	1000 pcs.
PCC-M0630W		
PCC-M104L		
PCC-M104W		
PCC-M125L	1000 pcs. / box (2 reel)	500 pcs.
PCC-D124H		
PCC-D125H		
PCC-D126H		
PCC-D126F		
PCC-F126F		

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

## Soldering Conditions

### ■ Reflow soldering conditions

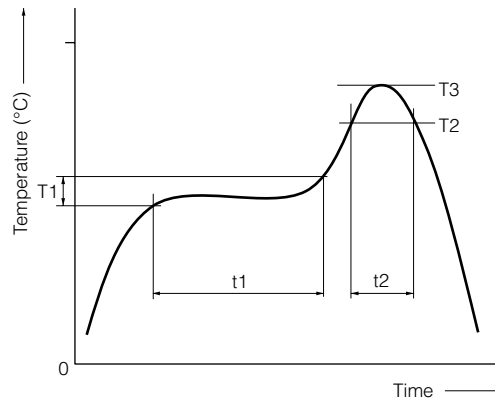

### ● Pb free solder recommended temperature profile Power Choke Coils for high reliability use

Series	Preheat		Soldering		Peak Temperature		Time of Reflow
	T1 [°C]	t1 [s]	T2 [°C]	t2 [s]	T3	T3 Limit	
PCC-D1413H PCC-M0530M/M0540M PCC-M0630M/M0645M PCC-M0754M PCC-M0854M/M0850M PCC-M1054M/M1050M PCC-M1050ML/M1060ML	150 to 170	60 to 120	230 °C	30 to 40	250 °C, 5 s	260 °C, 10 s	2 times max.

### Power Choke Coils for consumer use

Series	Preheat		Soldering		Peak Temperature		Time of Reflow
	T1 [°C]	t1 [s]	T2 [°C]	t2 [s]	T3	T3 Limit	
PCC-M0512W PCC-M0630L PCC-M0630W PCC-M0730L PCC-M074L PCC-M104L PCC-M104W PCC-M125L PCC-D124H PCC-D125H PCC-D126H PCC-D126F PCC-F126F	150 to 170	60 to 120	230 °C	30 to 40	250 °C, 5 s	260 °C, 10 s	2 times max.

**⚠ Safety Precautions****(Common precautions for Power Choke Coils for consumer use)**

- When using our products, no matter what sort of equipment they might be used for, be sure to make a written agreement on the specifications with us in advance. The design and specifications in this catalog are subject to change without prior notice.
- Do not use the products beyond the specifications described in this catalog.
- This catalog explains the quality and performance of the products as individual components. Before use, check and evaluate their operations when installed in your products.
- Install the following systems for a failsafe design to ensure safety if these products are to be used in equipment where a defect in these products may cause the loss of human life or other significant damage, such as damage to vehicles (automobile, train, vessel), traffic lights, medical equipment, aerospace equipment, electric heating appliances, combustion/gas equipment, rotating equipment, and disaster/crime prevention equipment.
- \* Systems equipped with a protection circuit and a protection device
- \* Systems equipped with a redundant circuit or other system to prevent an unsafe status in the event of a single fault

**⚠ Precautions for use****1. Provision to abnormal condition**

This power choke coil itself does not have any protective function in abnormal condition such as overload, short-circuit and open-circuit conditions, etc.

Therefore, it shall be confirmed as the end product that there is no risk of smoking, fire, dielectric withstand voltage, insulation resistance, etc. in abnormal conditions to provide protective devices and/or protection circuit in the end product.

**2. Temperature rise**

Temperature rise of power choke coil depends on the installation condition in end products. It shall be confirmed in the actual end product that temperature rise of power choke coil is in the limit of specified temperature class.

**3. Dielectric strength**

Dielectric withstanding test with higher voltage than specific value will damage Insulating material and shorten its life.

**4. Water**

This Power choke coil must not be used in wet condition by water, coffee or any liquid because insulation strength becomes very low in the condition.

**5. Potting**

If this power choke coil is potted in some compound, coating material of magnet wire might be occasionally damaged. Please ask us if you intend to pot this power choke coil.

**6. Detergent**

Please consult our company in case of this because the confirmation of reliability etc. is needed when the washing is used for the power choke coil.

**7. Storage temperature**

-5 °C to +35 °C

**8. Operating temperature**

Minimum temperature : -40 °C(Ambient temperature of the power choke coil)

Maximum temperature : 130 °C(Ambient temperature of the power choke coil plus the temperature rise)

100 °C(Only series : PCC-F126F(N6))

**9. Model**

When this power choke coil was used in a similar or new product to the original one, sometimes it might be unable to satisfy the specifications due to difference of condition of usage.

Please ask us if you would use this power choke coil in the manner such as above.

**10. Drop**

If the power choke coil suffered mechanical stress such as drop, characteristics may become poor (due to damage on coil bobbin, etc.). Never use such stressed power choke coil.

**<Package markings>**

Package markings include the product number, quantity, and country of origin.

In principle, the country of origin should be indicated in English.



## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.