

PM4344.153NLT Datasheet

www.digi-electronics.com



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	PM4344.153NLT-DG
Manufacturer	Pulse Electronics
Manufacturer Product Number	PM4344.153NLT
Description	FIXED IND 15UH 12.5A 20.5MOHM SM
Detailed Description	15 μ H Shielded Molded Inductor 12.5 A 20.5mOhm Max Nonstandard



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

PM4344.153NLT

Series:

PM4344.XXXNLT

Type:

Molded

Inductance:

15 μ H

Current Rating (Amps):

12.5 A

Shielding:

Shielded

Q @ Freq:

-

Ratings:

AEC-Q200

Inductance Frequency - Test:

100 kHz

Mounting Type:

Surface Mount

Supplier Device Package:

-

Height - Seated (Max):

0.276" (7.00mm)

Manufacturer:

Pulse Electronics

Product Status:

Active

Material - Core:

-

Tolerance:

\pm 20%

Current - Saturation (Isat):

23A

DC Resistance (DCR):

20.5mOhm Max

Frequency - Self Resonant:

-

Operating Temperature:

-55°C ~ 125°C

Features:

-

Package / Case:

Nonstandard

Size / Dimension:

0.697" L x 0.677" W (17.70mm x 17.20mm)

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8504.50.8000

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

SMT Power Inductor

High Current Molded Power Inductor - PA4344.XXXNLT & PM4344.XXXNLT Series



- Ⓢ **Height:** 7.0mm Max
- Ⓢ **Footprint:** 17.7mm x 17.2mm Max
- Ⓢ **Current Rating:** up to 52.0A
- Ⓢ **Inductance Range:** 1.0uH to 100uH
- Ⓢ Shielded construction and compact design
- Ⓢ High current, low DCR, and high efficiency
- Ⓢ Minimized acoustic noise and minimized leakage flux
- Ⓢ 200Vdc Isolation between terminal and core
- Ⓢ Available in Commercial (PA) and Automotive (PM) grades

Electrical Specifications @ 25°C - Operating Temperature -55°C to +125°C

Commercial ^{6,7}	Automotive ^{6,7}	Inductance ⁵ 100KHz, 1V	Rated ⁵ Current	DC Resistance		Saturation ² Current	Core loss for K factor
				TYP.	MAX.		
				uH±20%	A		
PA4344.102NLT	PM4344.102NLT	1.0	52	1.6	2	60	48.5
PA4344.132NLT	PM4344.132NLT	1.3	49	1.7	2.3	54	37.7
PA4344.152NLT	PM4344.152NLT	1.5	47	2	2.5	52	34.9
PA4344.222NLT	PM4344.222NLT	2.2	43.5	2.4	2.7	47	28.5
PA4344.332NLT	PM4344.332NLT	3.3	28	3.5	3.9	45	14.1
PA4344.472NLT	PM4344.472NLT	4.7	25	4.8	5.5	41	11.5
PA4344.562NLT	PM4344.562NLT	5.6	21	5.8	7.05	40	10.1
PA4344.682NLT	PM4344.682NLT	6.8	19	8.4	9.2	32	8.4
PA4344.822NLT	PM4344.822NLT	8.2	18	9.6	10.8	25	7.2
PA4344.103NLT	PM4344.103NLT	10	16.5	11.8	13	24	6.6
PA4344.153NLT	PM4344.153NLT	15	12.5	17.8	20.5	23	5.5
PA4344.223NLT	PM4344.223NLT	22	12	25.1	26.5	18	4.8
PA4344.333NLT	PM4344.333NLT	33	10.7	38	44	15	3.8
PA4344.393NLT	PM4344.393NLT	39	9.2	40	48	11	4.8
PA4344.473NLT	PM4344.473NLT	47	8.7	48	55	9.5	3
PA4344.563NLT	PM4344.563NLT	56	7.8	54	62	9	3
PA4344.683NLT	PM4344.683NLT	68	7	68	80	8	2.7
PA4344.104NLT	PM4344.104NLT	100	5.3	102	118	6.5	2.2

SMT Power Inductor


High Current Molded Power Inductor - PA4344.XXXNLT & PM4344.XXXNLT Series



Notes:


1. Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
2. The saturation current I is the current at which the initial inductance drops approximately 30% at the stated ambient temperature. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
3. The rated current is the DC current required to raise the component temperature by approximately 40 °C. Take note that the components' performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
4. The part temperature (ambient+temp rise) should not exceed 125 °C under worst case operating conditions. Circuit design, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
5. Please note that the inductance tolerance of all parts are +/-20% except those indicated with a * which are +/-30%.
6. Parts shown in bold are standard catalog parts and are available through sample stock and distribution. Parts in lighter font are available but are not necessarily held in sample stock or distribution and **lead times may be longer**. Please contact Pulse for availability.
7. Both the PA and PM part numbers are AEC-Q200 qualified parts. The PM part numbers have full automotive IATF16949 certification. The PM part number dimensions are 100% tested in production but do not necessarily meet a product capability index (Cpk) > 1.33 and therefore may not strictly conform to PPAP.
8. Special characteristics

Mechanical

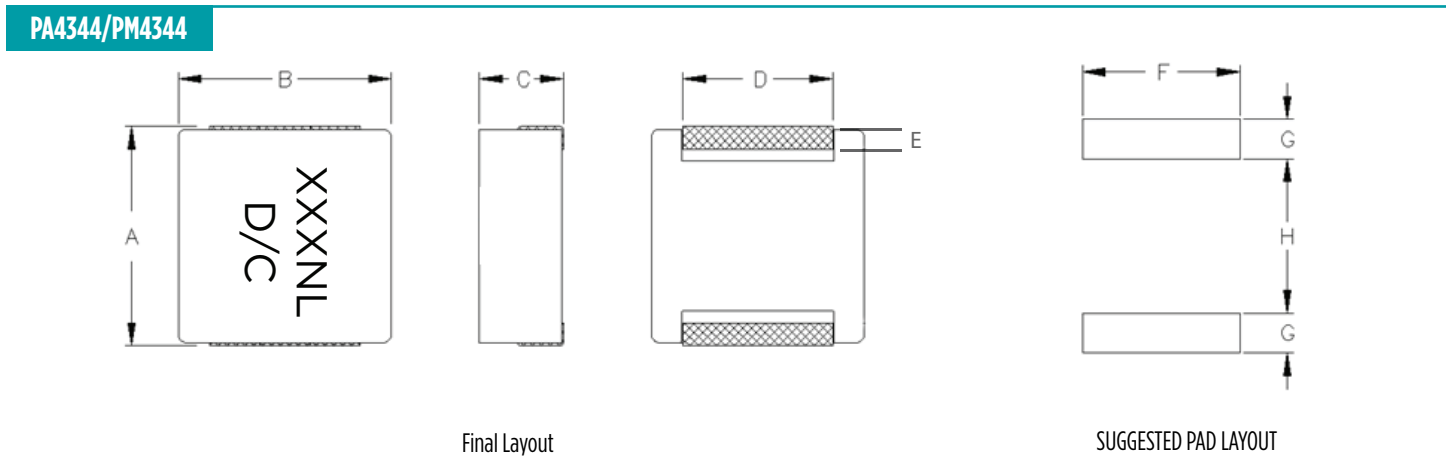

Series	A	B	C	D	E	F	G	H
PA4344/PM4344	17.3 +/- 0.4	17.2 max	7 max	11.9 +/- 0.3	2.1 +/- 0.3	12.2 max	2.4 max	12 max

All Dimensions in mm.

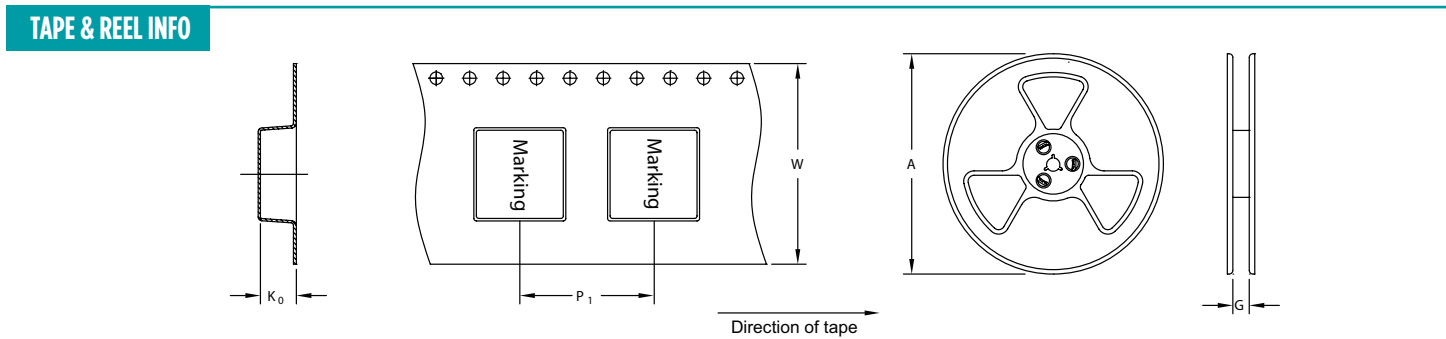

	SURFACE MOUNTING TYPE, REEL/TAPE LIST					
	REEL SIZE (mm)		TAPE SIZE (mm)			QTY
	A	G	P_1	W	K_0	PCS/REEL
PA4344/PM4344	Ø330	32	24	32	7.5	200
















SMT Power Inductor

High Current Molded Power Inductor - PA4344.XXXNLT & PM4344.XXXNLT Series






Typical Performance Curves

PA4344.XXXNLT and PM4344.XXXNLT

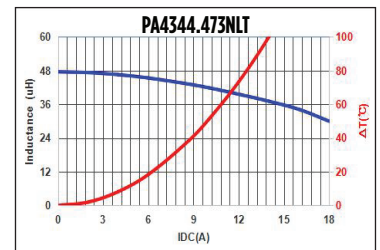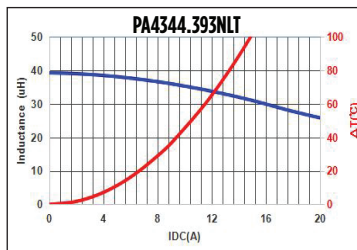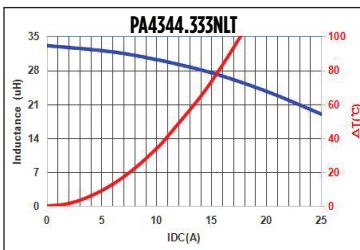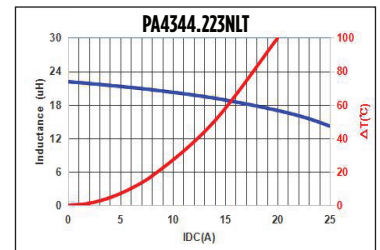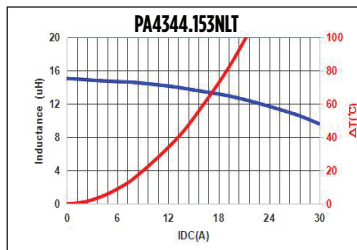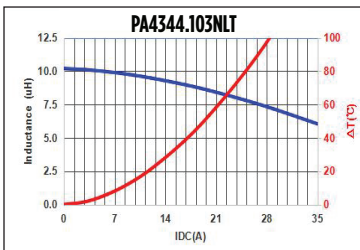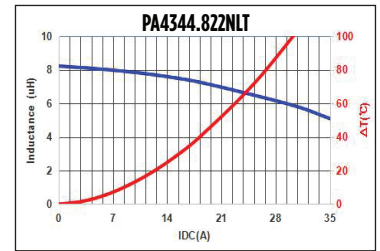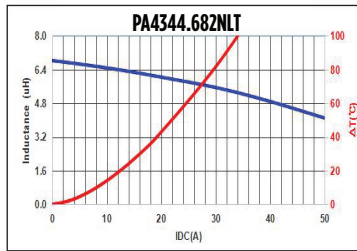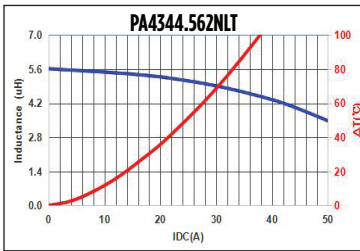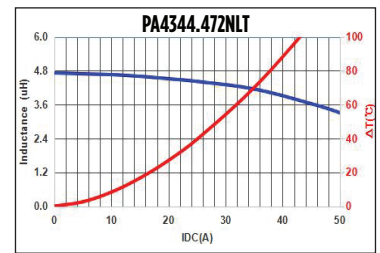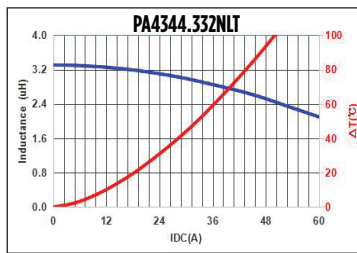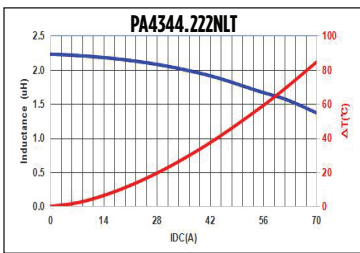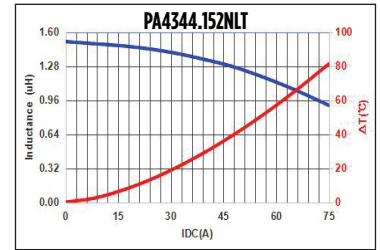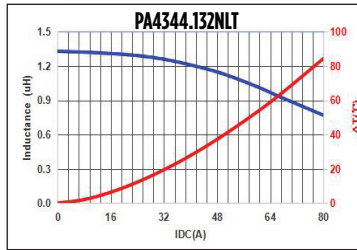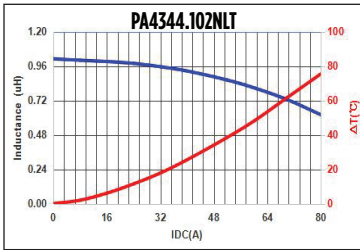


SMT Power Inductor

High Current Molded Power Inductor - PA4344.XXXNLT & PM4344.XXXNLT Series

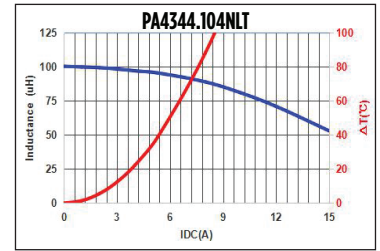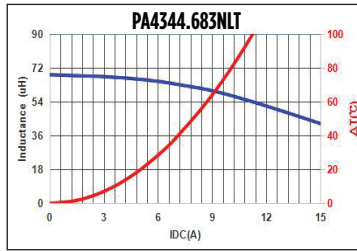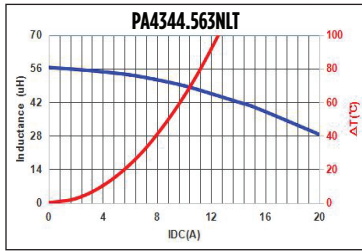

CoreLoss versus Flux Density

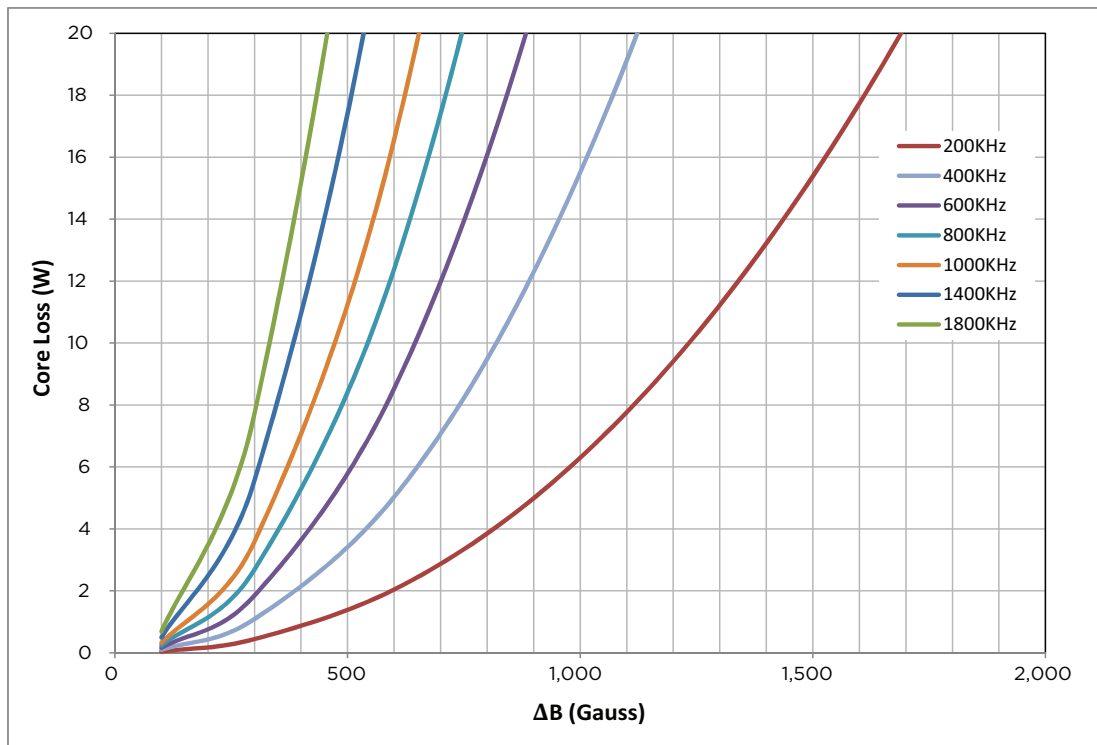

$$\Delta B = K * L(uH) * \Delta I(A)$$

For More Information:

Americas - prodinfo_power_americas@yageo.com | Europe - prodinfo_power_emea@yageo.com | Asia - prodinfo_power_asia@yageo.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2023. Pulse Electronics, Inc. All rights reserved.

YAGEO Corporation and its affiliates do not recommend the use of commercial, automotive, and/or COTS grade products for high reliability applications or manned space flight.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.