

7010.3470 Datasheet

www.digi-electronics.com



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	7010.3470-DG
Manufacturer	SCHURTER Inc.
Manufacturer Product Number	7010.3470
Description	FUSE GLASS 4A 220VAC 5X20MM
Detailed Description	4 A 220 V AC DC Fuse Cartridge, Glass Requires Holder 5mm x 20mm

This model 7010.3470 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

7010.3470

Series:

D1

Mounting Type:

Requires Holder

Current Rating (Amps):

4 A

Response Time:

Fast Blow

Breaking Capacity @ Rated Voltage:

60A

Approval Agency:

-

Color:

-

Manufacturer:

SCHURTER Inc.

Product Status:

Active

Fuse Type:

Cartridge, Glass

Voltage Rating - AC:

220 V

Package / Case:

5mm x 20mm

Melting I²t:

10

Operating Temperature:

-40°C ~ 70°C

Size / Dimension:

0.197" Dia x 0.787" L (5.00mm x 20.00mm)

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8536.10.0020

Moisture Sensitivity Level (MSL):

Not Applicable

ECCN:

EAR99

Miniature Fuse, 5 x 20 mm, Quick-Acting F, 220 VAC



220 VAC · Quick-Acting F

See below:

Approvals and Compliances

Description

- Low Breaking Capacity

Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Rated Voltage	32 - 220VAC	Resistance to Vibration	acc. to IEC 60068-2-6, test Fc
Rated current	0.02 - 10A	Mechanical Shock	acc. to IEC 60068-2-27
Breaking Capacity	60A - 300A	Mechanical Shock (Bump)	acc. to IEC 60068-2-29
Characteristic	Quick-Acting F	Salt Mist	acc. to IEC 60068-2-11
Mounting	Fuseholder / Clip		
Admissible Ambient Temp.	-40 °C to 70 °C		
Climatic Category	40/070/56 acc. to IEC 60068-1		
Material: Tube	Glass		
Material: Endcaps	Nickel-Plated Copper Alloy		
Unit Weight	1.2 g		
Storage Conditions	0 °C to 60 °C, max. 70% r.h.		
Product Marking	HA21, Rated current		

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.






Application standards

Application standards where the product can be used


Organization	Design	Standard	Description
	Suitable for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements

Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
	UKCA declaration of conformity	SCHURTER AG	The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.
	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.


Dimension [mm]



Pre-Arcing Time

Rated Current I _n	1.15 x I _n min.	1.65 x I _n max.	3.0 x I _n max.
0.02 A - 10 A	60 min	60 min	200 ms

Time-Current-Curves

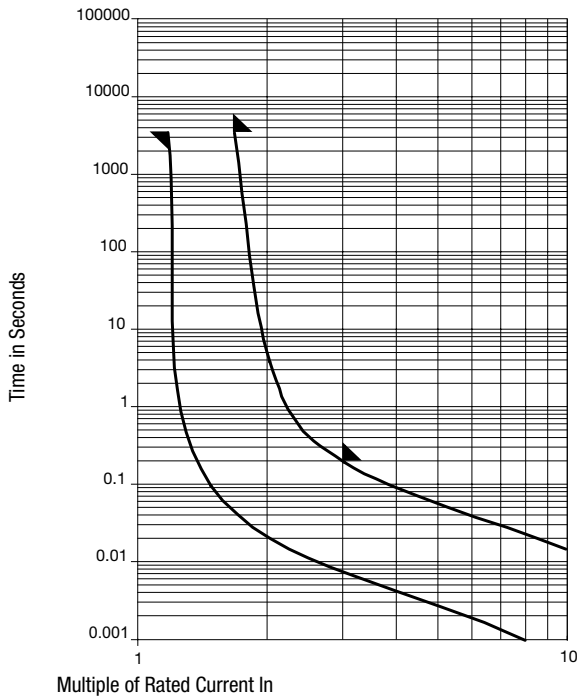

Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I _n typ. [mV]	Power Dissipation 1.15 I _n typ. [mW]	Melting Pt 10.0 I _n typ. [A ² s]	Order Number
0.02	220	1)	790	21	0.00027	7010.3110
0.031	220	1)	1400	60	0.00029	7010.3120
0.04	220	1)	2400	155	0.00017	7010.3130
0.05	220	1)	3300	260	0.00017	7010.3140
0.063	220	1)	2250	220	0.00046	7010.3150
0.08	220	1)	1750	215	0.0012	7010.3160
0.1	220	1)	1200	175	0.003	7010.3210
0.125	220	1)	1550	295	0.0037	7010.3220
0.16	220	1)	1300	320	0.0076	7010.3230
0.2	220	1)	1200	375	0.012	7010.3240
0.25	220	1)	1000	400	0.025	7010.3250
0.31	220	1)	475	225	0.018	7010.3260
0.4	220	1)	310	185	0.054	7010.3270
0.5	220	1)	285	215	0.096	7010.3280
0.63	220	1)	310	300	0.14	7010.3290
0.8	220	1)	270	335	0.3	7010.3310
1	220	1)	150	215	0.81	7010.3410
1.25	220	1)	325	660	0.47	7010.3420
1.6	125	2)	300	790	0.93	7010.3430
2	125	2)	185	560	1.9	7010.3440
2.5	125	2)	285	1250	2.5	7010.3450
3.15	125	2)	145	670	7.1	7010.3460
4	125	2)	165	1050	10	7010.3470
5	125	2)	165	1300	18	7010.3480
6.3	125	2)	130	1200	41	7010.3510
8	32	3)	120	1400	79	7010.3520
10	32	3)	120	1750	145	7010.3530

Availability for all products can be searched real-time: <https://www.schurter.com/en/info-center/support-tools/stock-check-distributors>

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I _n typ. [mV]	Power Dissipation 1.15 I _n typ. [mW]	Melting I ² t 10.0 I _n typ. [A ² s]	Order Number
-------------------	---------------------	-------------------	---	---	--	--------------

- 1) 60 A @ 220 VAC , cos φ = 0.6 - 0.8
- 2) 300 A @ 125 VAC , cos φ ≥ 0.95 / internal tests: 60 A @ 220 VAC
- 3) 300 A @ 32 VAC , cos φ ≥ 0.95

Packaging Unit	Small Box Pack (10 pcs.)
-----------------------	--------------------------

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.