

RMCF2010FT866R Datasheet

www.digi-electronics.com



<https://www.DiGi-Electronics.com>

| | |
|------------------------------|--|
| DiGi Electronics Part Number | RMCF2010FT866R-DG |
| Manufacturer | Stackpole Electronics Inc |
| Manufacturer Product Number | RMCF2010FT866R |
| Description | RES 866 OHM 1% 3/4W 2010 |
| Detailed Description | 866 Ohms \pm 1% 0.75W, 3/4W Chip Resistor 2010 (50 25 Metric) Automotive AEC-Q200 Thick Film |

This model RMCF2010FT866R is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

RMCF2010FT866R

Series:

RMCF

Resistance:

866 Ohms

Power (Watts):

0.75W, 3/4W

Features:

Automotive AEC-Q200

Operating Temperature:

-55°C ~ 155°C

Supplier Device Package:

2010

Size / Dimension:

0.197" L x 0.098" W (5.00mm x 2.50mm)

Number of Terminations:

2

Manufacturer:

Stackpole Electronics Inc

Product Status:

Active

Tolerance:

±1%

Composition:

Thick Film

Temperature Coefficient:

±100ppm/°C

Package / Case:

2010 (5025 Metric)

Ratings:

AEC-Q200

Height - Seated (Max):

0.028" (0.70mm)

Failure Rate:

-

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8533.21.0030

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

RMCF / RMCP Series

General Purpose Thick Film Standard Power and High-Power Chip Resistor

Stackpole Electronics, Inc.

Resistive Product Solutions

Features:

- RMCF – standard power ratings
- RMCP – high power ratings
- Nickel barrier terminations standard
- Power derating from 100% at 70°C to zero at +155°C
- RoHS compliant, REACH compliant, and halogen free
- AEC-Q200 compliant (except 01005 and 0201 sizes)
- For ultra-high power, see [RMCP-UP Series – Thick Film Ultra High-Power Chip Resistor](#)



| Electrical Specifications - RMCF | | | | | | | |
|----------------------------------|-------------------------|---|---------------------------|--------------------------|--------------|--|------------|
| Type/Code | Power Rating (W) @ 70°C | Max. Working Voltage (V) ⁽¹⁾ | Max. Overload Voltage (V) | Jumper Rated Current (A) | TCR (ppm/°C) | Ohmic Range (Ω) and Tolerance ⁽²⁾ | |
| | | | | | | 1% | 5% |
| RMCF01005 | 0.03 | 15 | 30 | 0.5 | ± 300 | 10 - 97.6 | |
| | | | | | ± 200 | 100 - 1M | |
| RMCF0201 | 0.05 | 25 | 50 | 0.5 | ± 400 | 1 - 9.76 | |
| | | | | | ± 200 | 10 - 10M | |
| RMCF0402 | 0.063 | 50 | 100 | 1 | ± 200 | 1 - 9.76 | |
| | | | | | ± 100 | 10 - 1M | |
| | | | | | ± 200 | 1.02M - 22.1M | 1.1M - 22M |
| RMCF0603 | 0.1 | 75 | 150 | 1 | ± 500 | 0.1 - 0.499 | |
| | | | | | ± 400 | 0.5 - 0.976 | |
| | | | | | ± 200 | 1 - 9.76 | 1 - 22M |
| | | | | | ± 100 | 10 - 1M | - |
| | | | | | ± 200 | 1.02M - 22.1M | - |
| RMCF0805 | 0.125 | 150 | 300 | 2 | ± 200 | 0.1 - 9.76 | 0.1 - 22M |
| | | | | | ± 100 | 10 - 1M | - |
| | | | | | ± 200 | 1.02M - 22.1M | - |
| RMCF1206 | 0.25 | 200 | 400 | 2 | ± 200 | 0.1 - 9.76 | 0.1 - 22M |
| | | | | | ± 100 | 10 - 1M | - |
| | | | | | ± 200 | 1.02M - 22.1M | - |
| RMCF1210 | 0.5 | 200 | 400 | 3 | ± 200 | 0.1 - 0.976 | |
| | | | | | ± 400 | 1 - 9.76 | |
| | | | | | ± 100 | 10 - 10M | |
| RMCF2010 | 0.75 | 200 | 400 | 3 | ± 200 | 0.1 - 0.976 | |
| | | | | | ± 400 | 1 - 9.76 | |
| | | | | | ± 200 | - | 10 - 10M |
| | | | | | ± 100 | 10 - 10M | - |
| RMCF2512 | 1 | 200 | 400 | 3 | ± 200 | 0.1 - 0.976 | |
| | | | | | ± 400 | 1 - 9.76 | |
| | | | | | ± 200 | - | 10 - 10M |
| | | | | | ± 100 | 10 - 10M | - |

Notes: (1) Lesser of $\sqrt{P \cdot R}$ or maximum working voltage

(2) Contact Stackpole for higher or lower values

RMCF / RMCP Series

General Purpose Thick Film Standard Power and High-Power Chip Resistor

Stackpole Electronics, Inc.

Resistive Product Solutions

| Electrical Specifications - RMCP | | | | | | |
|----------------------------------|-------------------------|---|---------------------------|--------------------------|--------------|--|
| Type/Code | Power Rating (W) @ 70°C | Max. Working Voltage (V) ⁽¹⁾ | Max. Overload Voltage (V) | Jumper Rated Current (A) | TCR (ppm/°C) | Ohmic Range (Ω) and Tolerance ⁽²⁾ |
| | | | | | | 1%, 5% |
| RMCP0201 | 0.063 | 25 | 50 | 1 | -200 / +400 | 1 - 9.76 |
| | | | | | ± 200 | 10 - 10M |
| RMCP0402 | 0.125 | 50 | 100 | 1.5 | ± 200 | 1 - 9.76 |
| | | | | | ± 100 | 10 - 10M |
| RMCP0603 | 0.25 | 75 | 150 | 2 | ± 200 | 1 - 9.76 |
| | | | | | ± 100 | 10 - 10M |
| RMCP0805 | 0.33 | 150 | 300 | 2.5 | ± 200 | 1 - 9.76 |
| | | | | | ± 100 | 10 - 10M |
| RMCP1206 | 0.5 | 200 | 400 | 3.5 | ± 400 | 1 - 9.76 |
| | | | | | ± 100 | 10 - 10M |
| RMCP1210 | 0.66 | 200 | 400 | 5 | ± 400 | 1 - 9.76 |
| | | | | | ± 100 | 10 - 10M |
| RMCP2010 | 1 | 200 | 400 | 6 | ± 200 | 1 - 9.76 |
| | | | | | ± 100 | 10 - 10M |
| RMCP2512 | 2 | 250 | 500 | 7 | ± 200 | 1 - 9.76 |
| | | | | | ± 100 | 10 - 10M |

Notes: (1) Lesser of $\sqrt{P \cdot R}$ or maximum working voltage
 (2) Contact Stackpole for higher or lower values
 The resistance value range for RMCP jumper is max. 0.02Ω

| Electrical Specifications - RMCF Jumper | | | |
|---|--------------------------|---------------------------|-----------------------------|
| Type/Code | Jumper Rated Current (A) | Max Overload Current (A)* | Jumper Resistance Value (Ω) |
| RMCF01005 | 0.5 | 1 | 0.05 max. |
| RMCF0201 | 0.5 | 1 | |
| RMCF0402 | 1 | 3 | |
| RMCF0603 | 1 | 5 | |
| RMCF0805 | 2 | 10 | |
| RMCF1206 | 2 | 10 | |
| RMCF1210 | 3 | 12 | |
| RMCF2010 | 3 | 12 | |
| RMCF2512 | 3 | 15 | |

* < 1 second and 1 time

RMCF / RMCP Series

General Purpose Thick Film Standard Power
and High-Power Chip Resistor

Stackpole Electronics, Inc.

Resistive Product Solutions

Mechanical Specifications



| Type/Code | Typical Unit Weight (mg) | L Body Length | W Body Width | H Body Height | a Top Termination | b Bottom Termination | Unit |
|----------------------|--------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------|
| RMCF01005 | 0.07 | 0.016 ± 0.001 0.40 ± 0.02 | 0.008 ± 0.001 0.20 ± 0.02 | 0.005 ± 0.001 0.13 ± 0.02 | 0.004 ± 0.001 0.10 ± 0.03 | 0.004 ± 0.001 0.10 ± 0.03 | inches mm |
| RMCF0201 RMCP0201 | 0.16 | 0.024 ± 0.001 0.60 ± 0.03 | 0.012 ± 0.001 0.30 ± 0.03 | 0.009 ± 0.002 0.23 ± 0.05 | 0.006 ± 0.002 0.15 ± 0.05 | 0.006 ± 0.002 0.15 ± 0.05 | inches mm |
| RMCF0402 RMCP0402 | 0.57 0.62 | 0.039 ± 0.004 1.00 ± 0.10 | 0.020 ± 0.002 0.50 ± 0.05 | 0.012 ± 0.004 0.30 ± 0.10 | 0.006 ± 0.004 0.15 ± 0.10 | 0.010 ± 0.006 0.25 ± 0.15 | inches mm |
| RMCF0603 RMCP0603 | 1.9 2.0 | 0.061 ± 0.006 1.55 ± 0.15 | 0.031 ± 0.006 0.80 ± 0.15 | 0.018 ± 0.006 0.45 ± 0.15 | 0.012 ± 0.008 0.30 ± 0.20 | 0.012 ± 0.008 0.30 ± 0.20 | inches mm |
| RMCF0805 RMCP0805 | 5.00 4.37 | 0.079 ± 0.008 2.00 ± 0.20 | 0.049 ± 0.004 1.25 ± 0.10 | 0.020 ± 0.006 0.50 ± 0.15 | 0.014 ± 0.010 0.35 ± 0.25 | 0.014 ± 0.010 0.35 ± 0.25 | inches mm |
| RMCF1206 RMCP1206 | 8.9 | 0.126 ± 0.010 3.20 ± 0.25 | 0.063 ± 0.006 1.60 ± 0.15 | 0.022 ± 0.006 0.55 ± 0.15 | 0.020 ± 0.012 0.50 ± 0.30 | 0.020 ± 0.012 0.50 ± 0.30 | inches mm |
| RMCF1210 RMCP1210 | 15.55 15.96 | 0.126 ± 0.010 3.20 ± 0.25 | 0.098 ± 0.010 2.50 ± 0.25 | 0.022 ± 0.006 0.55 ± 0.15 | 0.020 ± 0.012 0.50 ± 0.30 | 0.020 ± 0.012 0.50 ± 0.30 | inches mm |
| RMCF2010 RMCP2010 | 23.6 24.2 | 0.197 ± 0.008 5.00 ± 0.20 | 0.098 ± 0.008 2.50 ± 0.20 | 0.022 ± 0.006 0.55 ± 0.15 | 0.024 ± 0.012 0.60 ± 0.30 | 0.024 ± 0.014 0.60 ± 0.35 | inches mm |
| RMCF2512 RMCP2512 | 40.02 39.45 | 0.248 ± 0.008 6.30 ± 0.20 | 0.126 ± 0.010 3.20 ± 0.25 | 0.022 ± 0.008 0.55 ± 0.20 | 0.024 ± 0.012 0.60 ± 0.30 | 0.024 ± 0.014 0.60 ± 0.35 | inches mm |

Performance Characteristics

| Test | Test Specifications | Test Conditions (JIS-C 5202) |
|---------------------------------|---|---|
| Short Time Overload | ± (2% + 0.1Ω) | 2.5 x rated voltage for 5 seconds |
| | Jumper: Max 0.05Ω after test | 0201 = 1 A 0402 / 0603 = 2.5 A 0805 / 1206 / 1210 / 2010 / 2512 = 5 A |
| Dielectric Withstanding Voltage | No flashover or breakdown | 100 VAC, 1 minute |
| Resistance to Soldering Heat | ± 1% | 260 ± 5°C, for 10 seconds ± 0.5 seconds (Solder Bath) |
| Solderability | 95% coverage, minimum | 235 ± 5°C, for 2 seconds ± 0.5 seconds (Colophonium flux) |
| Temperature Cycle | ± (1% + 0.05Ω) Jumper (< 0.05Ω) | -65°C: 30 minutes 25°C: 2 to 3 minutes 155°C: 30 minutes 25°C: 2 to 3 minutes (5 Cycles) |
| Load Life (Endurance) | 1% and below: ± (1% + 0.05Ω) 2% and 5%: ± (3% + 0.1Ω) Value < 1Ω: ± (3% + 0.1Ω) Jumper: Max 0.1Ω after test. | 70 ± 2°C, RCWV or max. working voltage whichever is less for 1000 hours with 1.5 hours "ON" and 0.5 hour "OFF" |
| Voltage Coefficient | ± 100 (ppm/V) | 1/10 rated voltage for 3 seconds max. then rated voltage for 3 seconds max. |
| Robustness of Termination | ± (1% + 0.05Ω) | Bend of 2 mm for 5 ± 1 seconds |

RMCF / RMCP Series

General Purpose Thick Film Standard Power and High-Power Chip Resistor

Stackpole Electronics, Inc.

Resistive Product Solutions

Performance Characteristics (cont.)

| Test | Test Specifications | Test Conditions (JIS-C 5202) |
|-----------------------|---|---|
| Resistance to Solvent | 1%: $\pm (0.5\% + 0.05\Omega)$ 5%: $\pm (0.5\% + 0.05\Omega)$ Jumper: Max. 0.05Ω after test | The tested resistor should be immersed into isopropyl alcohol of 20 to 25°C for 60 seconds. Then the resistor is left in the room for 48 hours. |
| Damp Heat with Load | 1%: $\pm (1\% + 0.05\Omega)$ 5%: $\pm (2\% + 0.05\Omega)$ Values < 1Ω: $\pm (3\% + 0.1\Omega)$ Jumper: Max. 0.1Ω after test | 40 ± 2°C, 90%~95% R.H. RCWV or max. working voltage whichever is less for 1000 hours with 1.5 hours "ON" and 0.5 hours "OFF" |

Operating temperature range is -55 to +155°C for all sizes except for 01005 size

Operating temperature range for 01005 is -55 to +125°C

Power Derating Curve:



RMCF / RMCP Series

General Purpose Thick Film Standard Power and High-Power Chip Resistor

Stackpole Electronics, Inc.

Resistive Product Solutions

Repetitive Pulse Information

(This information is for reference only and is not guaranteed performance.)


If repetitive pulses are applied to resistors, pulse wave form must be less than “Pulse Limiting Voltage”, “Pulse Limiting Current” or “Pulse Limiting Wattage” calculated by the formula below.

$$V_p = K\sqrt{P \times R \times T / t}$$

$$I_p = K\sqrt{P / R \times T / t}$$

$$P_p = K^2 \times P \times T / t$$

- Where: V_p : Pulse limiting voltage (V)
 I_p : Pulse limiting current (A)
 P_p : Pulse limiting wattage (W)
 P: Power rating (W)
 R: Nominal resistance (ohm)
 T: Repetitive period (sec)
 t: Pulse duration (sec)
 K: Coefficient by resistors type (refer to below matrix)
 [V_r : Rated Voltage (V), I_r : Rated Current (A)]

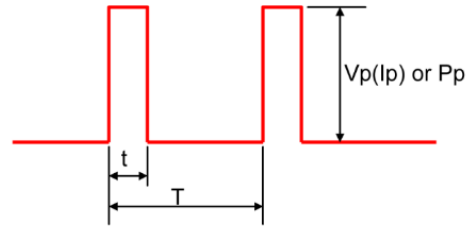

- Note 1: If $T > 10 \rightarrow T = 10$ (sec), $T/t > 1000 \rightarrow T/t = 1000$
 Note 2: If $T > 10$ and $T/t > 1000$, “Pulse Limiting power (Single pulse) is applied
 Note 3: If $V_p < V_r$ ($I_p < I_r$ or $P_p < P$), V_r (I_r , P) is V_p (I_p , P_p)
 Note 4: Pulse limiting voltage (current, wattage) is applied at less than rated ambient temperature. If ambient temperature is more than the rated temperature (70°C), please decrease power rating according to “Power Derating Curve”
 Note 5: Please assure sufficient margin for use period and conditions for “Pulse Limiting Voltage”
 Note 6: If the pulse waveform is not square wave, please judge after transform the waveform into square wave according to the “Waveform Transformation to Square Wave”.

| RMCF Coefficient (K) Matrix | |
|-------------------------------|------|
| Ohmic Value | K |
| $R < 10\Omega$ | 0.50 |
| $10\Omega \leq R < 100\Omega$ | 0.45 |
| $100\Omega \leq R < 1K\Omega$ | 0.35 |
| $1K\Omega \leq R < 10K\Omega$ | 0.25 |
| $10K\Omega \leq R$ | 0.20 |

RMCF / RMCP Series

General Purpose Thick Film Standard Power and High-Power Chip Resistor

Stackpole Electronics, Inc.

Resistive Product Solutions

Waveform Transformation to Square Wave

1. Discharge curve wave with time constant "t" → Square wave



2. Damping oscillation wave with time constant of envelope "t" → Square wave



3. Half-wave rectification wave → Square wave



4. Triangular wave → Square wave



5. Special wave → Square wave



RMCF / RMCP Series

General Purpose Thick Film Standard Power
and High-Power Chip Resistor

Stackpole Electronics, Inc.

Resistive Product Solutions

Recommended Pad Layout



| Type/Code | A | B | C | Unit |
|----------------------|---------------|---------------|---------------|--------------|
| RMCF01005 | 0.008 0.20 | 0.020 0.50 | 0.008 0.20 | inches mm |
| RMCF0201 RMCP0201 | 0.012 0.30 | 0.039 1.00 | 0.016 0.40 | inches mm |
| RMCF0402 RMCP0402 | 0.020 0.50 | 0.059 1.50 | 0.024 0.60 | inches mm |
| RMCF0603 RMCP0603 | 0.031 0.80 | 0.083 2.10 | 0.035 0.90 | inches mm |
| RMCF0805 RMCP0805 | 0.047 1.20 | 0.118 3.00 | 0.051 1.30 | inches mm |
| RMCF1206 RMCP1206 | 0.087 2.20 | 0.165 4.20 | 0.063 1.60 | inches mm |
| RMCF1210 RMCP1210 | 0.087 2.20 | 0.165 4.20 | 0.110 2.80 | inches mm |
| RMCF2010 RMCP2010 | 0.138 3.50 | 0.240 6.10 | 0.110 2.80 | inches mm |
| RMCF2512 RMCP2512 | 0.193 4.90 | 0.315 8.00 | 0.138 3.50 | inches mm |

RMCF / RMCP Series

General Purpose Thick Film Standard Power and High-Power Chip Resistor

Stackpole Electronics, Inc.

Resistive Product Solutions

Recommended Solder Profile

This information is intended as a reference for solder profiles for Stackpole resistive components. These profiles should be compatible with most soldering processes. These are only recommendations. Actual numbers will depend on board density, geometry, packages used, etc., especially those cells labeled with “*”.

100% Matte Tin / RoHS Compliant Terminations

Soldering iron recommended temperatures: 330°C to 350°C with minimum duration.
Maximum number of reflow cycles is 3.

| Wave Soldering | | | |
|-------------------|------------|-------------|------------|
| Description | Maximum | Recommended | Minimum |
| Preheat Time | 80 seconds | 70 seconds | 60 seconds |
| Temperature Diff. | 140°C | 120°C | 100°C |
| Solder Temp. | 260°C | 250°C | 240°C |
| Dwell Time at Max | 10 seconds | 5 seconds | * |
| Ramp DN (°C/sec) | N/A | N/A | N/A |

Temperature Diff. = Difference between final preheat stage and soldering stage.

| Convection IR Reflow | | | |
|----------------------|-------------|-------------|------------|
| Description | Maximum | Recommended | Minimum |
| Ramp Up (°C/sec) | 3°C/sec | 2°C/sec | * |
| Dwell Time > 217°C | 150 seconds | 90 seconds | 60 seconds |
| Solder Temp. | 260°C | 245°C | * |
| Dwell Time at Max. | 30 seconds | 15 seconds | 10 seconds |
| Ramp DN (°C/sec) | 6°C/sec | 3°C/sec | * |



RMCF / RMCP Series

General Purpose Thick Film Standard Power
and High-Power Chip Resistor

Stackpole Electronics, Inc.

Resistive Product Solutions

Packaging (EIA Standard RS-481)

| Reel Specifications | | | | | | | |
|---------------------------|---------------|----------------|---------------|---------------|---------------|---------------|--------|
| | | | | | | | |
| Reel Type | Wa | M | A | B | C | D | Unit |
| 7" reel for 8 mm tape | 0.354 ± 0.020 | 7.008 ± 0.079 | 0.079 ± 0.020 | 0.531 ± 0.020 | 0.827 ± 0.020 | 2.362 ± 0.039 | inches |
| | 9.00 ± 0.50 | 178.00 ± 2.00 | 2.00 ± 0.50 | 13.50 ± 0.50 | 21.00 ± 0.50 | 60.00 ± 1.00 | mm |
| 10" reel for 8 mm tape | 0.394 ± 0.020 | 10.000 ± 0.079 | 0.079 ± 0.020 | 0.531 ± 0.020 | 0.827 ± 0.020 | 3.937 ± 0.039 | inches |
| | 10.00 ± 0.50 | 254.00 ± 2.00 | 2.00 ± 0.50 | 13.50 ± 0.50 | 21.00 ± 0.50 | 100.00 ± 1.00 | mm |

| Packaging Specifications - Paper Tape (sizes 01005 - 1210) | | | | | | | |
|--|--------------------------------------|---------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------|
| | | | | | | | |
| Type/Code | Nominal Typical Full Reel Weight (g) | Tape Width | A | B | W | E | Unit |
| RMCF01005 | 127.3 | 0.315 8.00 | 0.009 ± 0.002 0.24 ± 0.05 | 0.018 ± 0.004 0.45 ± 0.10 | 0.315 ± 0.008 8.00 ± 0.20 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |
| RMCF0201 RMCP0201 | 97.2 | 0.315 8.00 | 0.016 ± 0.006 0.40 ± 0.15 | 0.028 ± 0.006 0.70 ± 0.15 | 0.315 ± 0.008 8.00 ± 0.20 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |
| RMCF0402 RMCP0402 | 94.5 | 0.315 8.00 | 0.028 ± 0.006 0.70 ± 0.15 | 0.047 ± 0.006 1.20 ± 0.15 | 0.315 ± 0.008 8.00 ± 0.20 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |
| RMCF0603 RMCP0603 | 118.3 | 0.315 8.00 | 0.041 ± 0.008 1.05 ± 0.20 | 0.071 ± 0.008 1.80 ± 0.20 | 0.315 ± 0.008 8.00 ± 0.20 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |
| RMCF0805 RMCP0805 | 139.2 | 0.315 8.00 | 0.063 ± 0.010 1.60 ± 0.25 | 0.093 ± 0.010 2.35 ± 0.25 | 0.315 ± 0.008 8.00 ± 0.20 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |
| RMCF1206 RMCP1206 | 151.4 | 0.315 8.00 | 0.077 ± 0.010 1.95 ± 0.25 | 0.140 ± 0.010 3.55 ± 0.25 | 0.315 ± 0.008 8.00 ± 0.20 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |
| RMCF1210 RMCP1210 | 175.7 | 0.315 8.00 | 0.110 ± 0.010 2.80 ± 0.25 | 0.138 ± 0.008 3.50 ± 0.20 | 0.315 ± 0.008 8.00 ± 0.20 | 0.069 ± 0.004 1.75 ± 0.10 | inches mm |

RMCF / RMCP Series

General Purpose Thick Film Standard Power and High-Power Chip Resistor


Stackpole Electronics, Inc.

Resistive Product Solutions

Packaging Specifications - Paper Tape (sizes 01005 - 1210)

| Type/Code | F | T | P | P0 | P1 | DØ | Unit |
|----------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|----------------------------------|--------------|
| RMCF01005 | 0.138 ± 0.002 3.50 ± 0.05 | 0.016 ± 0.004 0.40 ± 0.10 | 0.079 ± 0.004 2.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.004 2.00 ± 0.10 | 0.059 +0.004/-0 1.50 +0.10/-0 | inches mm |
| RMCF0201 RMCP0201 | 0.138 ± 0.002 3.50 ± 0.05 | 0.015 ± 0.006 0.38 ± 0.15 | 0.079 ± 0.004 2.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.004 2.00 ± 0.10 | 0.059 +0.004/-0 1.50 +0.10/-0 | inches mm |
| RMCF0402 RMCP0402 | 0.138 ± 0.002 3.50 ± 0.05 | 0.016 ± 0.008 0.40 ± 0.20 | 0.079 ± 0.004 2.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.004 2.00 ± 0.10 | 0.059 +0.004/-0 1.50 +0.10/-0 | inches mm |
| RMCF0603 RMCP0603 | 0.138 ± 0.002 3.50 ± 0.05 | 0.024 ± 0.004 0.60 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.004 2.00 ± 0.10 | 0.059 +0.004/-0 1.50 +0.10/-0 | inches mm |
| RMCF0805 RMCP0805 | 0.138 ± 0.002 3.50 ± 0.05 | 0.030 ± 0.004 0.75 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.004 2.00 ± 0.10 | 0.059 +0.004/-0 1.50 +0.10/-0 | inches mm |
| RMCF1206 RMCP1206 | 0.138 ± 0.002 3.50 ± 0.05 | 0.030 ± 0.004 0.75 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.004 2.00 ± 0.10 | 0.059 +0.004/-0 1.50 +0.10/-0 | inches mm |
| RMCF1210 RMCP1210 | 0.138 ± 0.002 3.50 ± 0.05 | 0.030 ± 0.004 0.75 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.004 2.00 ± 0.10 | 0.059 +0.004/-0 1.50 +0.10/-0 | inches mm |

Packaging Specifications - Plastic Tape (sizes 2010 and 2512)

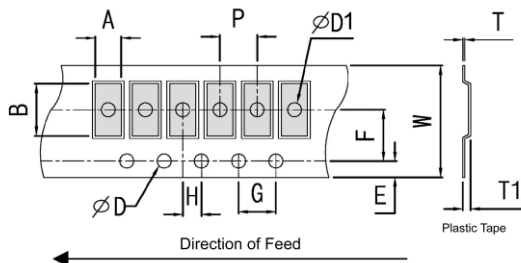

| Type/Code | Nominal Typical Full Reel Weight (g) | Tape Width | A | B | W | E | F | Unit |
|----------------------|--------------------------------------|------------------------------|------------------------------|----------------------------------|-------------------------------|------------------------------|------------------------------|--------------|
| RMCF2010 RMCP2010 | 183.1 | 0.472 12.00 | 0.110 ± 0.008 2.80 ± 0.20 | 0.217 ± 0.012 5.50 ± 0.30 | 0.472 ± 0.008 12.00 ± 0.20 | 0.069 ± 0.004 1.75 ± 0.10 | 0.217 ± 0.002 5.50 ± 0.05 | inches mm |
| RMCF2512 RMCP2512 | 255.3 | 0.472 12.00 | 0.134 ± 0.008 3.40 ± 0.20 | 0.264 ± 0.008 6.70 ± 0.20 | 0.472 ± 0.008 12.00 ± 0.20 | 0.069 ± 0.004 1.75 ± 0.10 | 0.217 ± 0.002 5.50 ± 0.05 | inches mm |
| Type/Code | G | H | T | ØD | ØD1 | T1 | P | Unit |
| RMCF2010 RMCP2010 | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.002 2.00 ± 0.05 | 0.009 ± 0.004 0.23 ± 0.10 | 0.059 +0.004/-0 1.50 +0.10/-0 | 0.059 ± 0.004 1.50 ± 0.10 | 0.035 ± 0.008 0.90 ± 0.20 | 0.157 ± 0.004 4.00 ± 0.10 | inches mm |
| RMCF2512 RMCP2512 | 0.157 ± 0.004 4.00 ± 0.10 | 0.079 ± 0.002 2.00 ± 0.05 | 0.009 ± 0.004 0.23 ± 0.10 | 0.059 +0.004/-0 1.50 +0.10/-0 | 0.059 ± 0.004 1.50 ± 0.10 | 0.035 ± 0.008 0.90 ± 0.20 | 0.157 ± 0.004 4.00 ± 0.10 | inches mm |

RMCF / RMCP Series

General Purpose Thick Film Standard Power and High-Power Chip Resistor

Stackpole Electronics, Inc.
Resistive Product Solutions



The data provided are for reference only. They are typical performance for this product but are not guaranteed. The actual pulse handling of each individual resistor may vary depending on a variety of factors including resistance tolerance and resistance value. Stackpole Electronics, Inc. assumes no liability for the use of this information. Customers should validate the performance of these products in their applications. Contact Stackpole marketing to discuss specific pulse application requirements.

Temperature Measurement of Resistor Surface

Description: The resistor surface generated temperature variation after applied rated voltage.

| Size | 0201 | 0402 | 0603 | 0805 | 1206 | 1210 | 2010 | 2512 |
|-----------------------|------|-------|-------|------|------|------|------|------|
| R-V | 15K | 40.2K | 57.6K | 180K | 182K | 100K | 100K | 75K |
| Rated Power (W) | 1/20 | 1/16 | 1/10 | 1/8 | 1/4 | 1/2 | 3/4 | 1 |
| Max Rated Voltage (V) | 25 | 50 | 75 | 150 | 200 | 200 | 200 | 200 |

Test method: Measure component surface temperature directly after the temperature stabilizes.
Test result: As per table below:



| Size | 0201 | 0402 | 0603 | 0805 | 1206 | 1210 | 2010 | 2512 |
|--------------------|------|------|------|------|------|-------|------|-------|
| Surface Temp. (°C) | 36 | 37 | 46.2 | 50.4 | 70.6 | 110.6 | 141 | 150.4 |

The thermal resistance of the RMCP will be similar to the RMCF. For example, the RMCF2512 and the RMCP2512 will have similar surface temperatures at 1W; the RMCP is designed to withstand higher temperatures associated with high power levels.

RMCF / RMCP Series

General Purpose Thick Film Standard Power and High-Power Chip Resistor

Stackpole Electronics, Inc.
Resistive Product Solutions

Part Marking Instructions

E96 and E24 Values for 0805-2512 (1% tolerances)

The nominal resistance is marked on the surface of the overcoating with the use of **four character markings**.

1. Values <100Ω will use "R" as the decimal holder.



E24 Values for 0805-2512 (5% tolerance, ≤ 0.91Ω)

The nominal resistance is marked on the surface of the overcoating with the use of **four character markings**.


1. Values ≤ 0.91Ω will use "R" as the decimal holder.



E24 Values for 0805-2512 (5% tolerance, ≥ 1Ω)

The nominal resistance is marked on the surface of the overcoating with the use of **three character markings**.



1. Values between 1Ω and 9.1Ω will use "R" as the decimal holder.



E24 Values for 0603

The nominal resistance is marked on the surface of the overcoating with the use of **three character markings**.

1. Values between 0.1Ω and 9.1Ω will use "R" as the decimal holder.
2. Values ≥10Ω will use no decimal holder.
3. 5% tolerance is not underlined. 1% tolerance is underlined.



(Effective date for 1% underline marking is date codes on/or after April 1st 2025)

4. Values that are both E24 and E96 follow E96 marking rules.

E96 Values for 0603 size (1% tolerances)

A two character number is assigned to each standard R-Value (E96) as shown in the chart below. This is followed by one alpha character which is used as a multiplier. Each letter from "Y" - "F" represents a specific multiplier.



| Alpha Character = Multiplier | |
|------------------------------|-------------|
| Y = 0.1 | C = 1000 |
| X = 1 | D = 10000 |
| A = 10 | E = 100000 |
| B = 100 | F = 1000000 |

| Chip Marking | Value |
|--------------|-----------------------|
| 01B = | 10.0 x 100 = 1 KΩ |
| 25C = | 17.8 x 1000 = 17.8 KΩ |
| 93D = | 90.9 x 10000 = 909 KΩ |

| E96 | | | | | | | | | | | |
|-----|---------|----|---------|----|---------|----|---------|----|---------|----|---------|
| # | R-Value | # | R-Value | # | R-Value | # | R-Value | # | R-Value | # | R-Value |
| 01 | 10.0 | 17 | 14.7 | 33 | 21.5 | 49 | 31.6 | 65 | 46.4 | 81 | 68.1 |
| 02 | 10.2 | 18 | 15.0 | 34 | 22.1 | 50 | 32.4 | 66 | 47.5 | 82 | 69.8 |
| 03 | 10.5 | 19 | 15.4 | 35 | 22.6 | 51 | 33.2 | 67 | 48.7 | 83 | 71.5 |
| 04 | 10.7 | 20 | 15.8 | 36 | 23.2 | 52 | 34.0 | 68 | 49.9 | 84 | 73.2 |
| 05 | 11.0 | 21 | 16.2 | 37 | 23.7 | 53 | 34.8 | 69 | 51.1 | 85 | 75.0 |
| 06 | 11.3 | 22 | 16.5 | 38 | 24.3 | 54 | 35.7 | 70 | 52.3 | 86 | 76.8 |
| 07 | 11.5 | 23 | 16.9 | 39 | 24.9 | 55 | 36.5 | 71 | 53.6 | 87 | 78.7 |
| 08 | 11.8 | 24 | 17.4 | 40 | 25.5 | 56 | 37.4 | 72 | 54.9 | 88 | 80.6 |
| 09 | 12.1 | 25 | 17.8 | 41 | 26.1 | 57 | 38.3 | 73 | 56.2 | 89 | 82.5 |
| 10 | 12.4 | 26 | 18.2 | 42 | 26.7 | 58 | 39.2 | 74 | 57.6 | 90 | 84.5 |
| 11 | 12.7 | 27 | 18.7 | 43 | 27.4 | 59 | 40.2 | 75 | 59.0 | 91 | 86.6 |
| 12 | 13.0 | 28 | 19.1 | 44 | 28.0 | 60 | 41.2 | 76 | 60.4 | 92 | 88.7 |
| 13 | 13.3 | 29 | 19.6 | 45 | 28.7 | 61 | 42.2 | 77 | 61.9 | 93 | 90.9 |
| 14 | 13.7 | 30 | 20.0 | 46 | 29.4 | 62 | 43.2 | 78 | 63.4 | 94 | 93.1 |
| 15 | 14.0 | 31 | 20.5 | 47 | 30.1 | 63 | 44.2 | 79 | 64.9 | 95 | 95.3 |
| 16 | 14.3 | 32 | 21.0 | 48 | 30.9 | 64 | 45.3 | 80 | 66.5 | 96 | 97.6 |

Note: 01005, 0201, and 0402 sizes are unmarked.

RMCF / RMCP Series

General Purpose Thick Film Standard Power and High-Power Chip Resistor

Stackpole Electronics, Inc.

Resistive Product Solutions

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union’s directive regarding “Restrictions on Hazardous Substances” (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

| RoHS Compliance Status | | | | | | |
|-------------------------|---|----------------------------|--------------------------------|-----------------------------------|--|---------------------------------------|
| Standard Product Series | Description | Package / Termination Type | Standard Series RoHS Compliant | Lead-Free Termination Composition | Lead-Free Mfg. Effective Date (Std Product Series) | Lead-Free Effective Date Code (YY/WW) |
| RMCF | General Purpose Thick Film Standard Power Chip Resistor | SMD | YES ⁽¹⁾ | 100% Matte Sn over Ni | Jan-04 (Japan) Jan-05 (Taiwan, China) | 04/01 05/01 |
| RMCP | General Purpose Thick Film High-Power Chip Resistor | SMD | YES ⁽¹⁾ | 100% Matte Sn over Ni | Always | Always |

Note (1): RoHS Compliant by means of exemption 7c-l.

“Conflict Metals” Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

Compliance to “REACH”

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy

It is the policy of Stackpole Electronics, Inc. (SEI) to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

RMCF / RMCP Series

General Purpose Thick Film Standard Power and High-Power Chip Resistor

Stackpole Electronics, Inc.

Resistive Product Solutions

How to Order - RMCF

R M C F 0 6 0 3 J T 4 K 7 0

| Product Series | Size | | Tolerance | | | Packaging | | | | Resistance Value |
|----------------|-------|-------|-----------|-----|----------|-----------|---------------------|------------------|----------|--|
| Code | Size | W | Code | Tol | Value | Code | Description | Size | Quantity | Four characters with the multiplier used as the decimal holder. |
| RMCF | 01005 | 0.03 | F | 1% | E96, E24 | T | 7" Reel Paper Tape | 01005 | 10000 | 0.1 ohm = R100 4.70 ohm = 4R70 10.0 Kohm = 10K0 1 Mohm = 1M00 Zero ohm jumper = 0R00 |
| | 0201 | 0.05 | J | 5% | E24 | | | 0201, 0402 | 10000 | |
| | 0402 | 0.063 | Z Jumper | | | | | 0603, 0805, 1206 | 5000 | |
| | 0603 | 0.1 | | | | | 1210 | 4000 | | |
| | 0805 | 0.125 | | | | G | 10" Reel Paper Tape | 2010, 2512 | 4000 | |
| | 1206 | 0.25 | | | | | | 0603, 0805, 1206 | 10000 | |
| | 1210 | 0.5 | | | | | | | | |
| | 2010 | 0.75 | | | | | | | | |
| | 2512 | 1 | | | | | | | | |

How to Order - RMCP

R M C P 0 6 0 3 J T 4 K 7 0

| Product Series | Size | | Tolerance | | | Packaging | | | | Resistance Value |
|----------------|------|-------|-----------|-----|----------|--------------------|--------------------|--------------------------|------------|---|
| Code | Size | W | Code | Tol | Value | Code | Description | Size | Quantity | Four characters with the multiplier used as the decimal holder. |
| RMCP | 0201 | 0.063 | F | 1% | E96, E24 | T | 7" Reel Paper Tape | 0201, 0402 | 10000 | 1 ohm = 1R00 10 Kohm = 10K0 1 Mohm = 1M00 |
| | 0402 | 0.125 | J | 5% | E24 | | | 0603, 0805 1206, 1210 | 5000 | |
| | 0603 | 0.25 | Z Jumper | | | | G | 10" Reel Paper Tape | 2010, 2512 | |
| | 0805 | 0.33 | | | | 0603, 0805 1206 | | | 10000 | |
| | 1206 | 0.5 | | | | | | | | |
| | 1210 | 0.66 | | | | | | | | |
| | 2010 | 1 | | | | | | | | |
| | 2512 | 2 | | | | | | | | |

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we strictly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.