


MLP2520H3R3MT0S1 Datasheet

www.digi-electronics.com

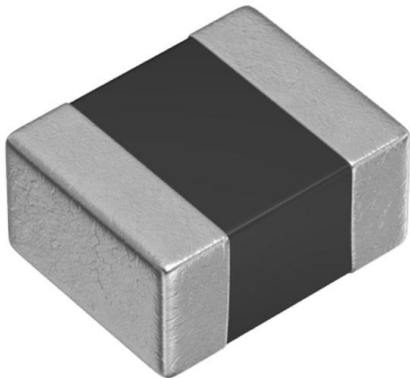

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	MLP2520H3R3MT0S1-DG
Manufacturer	TDK Corporation
Manufacturer Product Number	MLP2520H3R3MT0S1
Description	FIXED IND 3.3UH 1.1A 169MOHM SMD
Detailed Description	3.3 μ H Shielded Multilayer Inductor 1.1 A 169mOhm Max 1008 (2520 Metric)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

MLP2520H3R3MT0S1

Series:

MLP

Type:

Multilayer

Inductance:3.3 μ H**Current Rating (Amps):**

1.1 A

Shielding:

Shielded

Q @ Freq:

-

Ratings:

-

Inductance Frequency - Test:

2 MHz

Package / Case:

1008 (2520 Metric)

Size / Dimension:

0.098" L x 0.079" W (2.50mm x 2.00mm)

Manufacturer:

TDK Corporation

Product Status:

Active

Material - Core:

Ferrite

Tolerance: \pm 20%**Current - Saturation (Isat):**

-

DC Resistance (DCR):

169mOhm Max

Frequency - Self Resonant:

-

Operating Temperature:

-40°C ~ 125°C

Mounting Type:

Surface Mount

Supplier Device Package:

1008 (2520 Metric)

Height - Seated (Max):

0.039" (1.00mm)

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8504.50.4000

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

Inductors for power circuits

Multilayer ferrite

MLP series



MLP2520 type



FEATURES

- A low-loss magnetic material is used so that a low-loss inductor for the power supply circuit can be achieved.
- In addition to the inductance value, product types with various features are available so that they can be compatible with different usages.
 - Wtype : products with low DC resistance and large current.
 - Htype : this product uses a low-loss material and has low DC resistance.
 - * Optimal for when heavy load power efficiency is important.
 - Vtype : as with the H type, this product with a low-loss magnetic material and that has good DC superimposition type characteristics.
 - * Optimal for when light load power efficiency is important.
 - Stype : STD product lineup that includes a wide L value and various sizes.
- Operating temperature range: -40 to +125°C (including self-temperature rise)

APPLICATION

- Smart phones, tablet terminals, digital cameras, video cameras, HDDs, power supply modules, etc.

PART NUMBER CONSTRUCTION

MLP	2520	W	R47	M	T	0S1
Series name	L×W×T dimensions 2.5×2.0 mm	Characteristic type	Inductance (μH)	Height 1.0 mm max. 1.2 mm max.	Packaging style	Internal code

CHARACTERISTICS SPECIFICATION TABLE

Type	Thickness	L	Measuring frequency	DC resistance	Rated current*	Part No.	
	T (mm)max.	(μH) Tolerance	(MHz)	(Ω)±30%	(mA)max.		
Large current	Low resistance	1.0	0.47 ±20%	2	0.033	2900	MLP2520WR47MT0S1
		1.0	0.68 ±20%	2	0.040	2800	MLP2520WR68MT0S1
		1.0	1.00 ±20%	2	0.048	2300	MLP2520W1R0MT0S1
		1.0	1.50 ±20%	2	0.075	1800	MLP2520W1R5MT0S1
		1.0	2.20 ±20%	2	0.160	1200	MLP2520W2R2MT0S1
		1.0	3.30 ±20%	2	0.160	1200	MLP2520W3R3MT0S1
		1.0	4.70 ±20%	2	0.150	1200	MLP2520W4R7MT0S1


 Background red: The products has been stopped production.

* Rated current: current assumed when temperature has risen to 40°C max.

Measurement equipment

Measurement item	Product No.	Manufacturer
L	4294A+16034G	Keysight Technologies
DC resistance	Type-755611	Yokogawa

* Equivalent measurement equipment may be used.

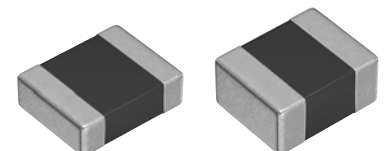

MLP2520 type

■ CHARACTERISTICS SPECIFICATION TABLE

Type	Thickness T (mm)max.	L (μ H) Tolerance	Measuring frequency (MHz)	DC resistance (Ω) \pm 30%	Rated current* (mA)max.	Part No.	
Emphasized low resistance	1.0	0.47 \pm 20%	2	0.044	2100	MLP2520HR47MT0S1	
	1.0	1.00 \pm 20%	2	0.075	1500	MLP2520H1R0MT0S1	
	1.0	2.20 \pm 20%	2	0.090	1300	MLP2520H2R2MT0S1	
	1.0	3.30 \pm 20%	2	0.130	1100	MLP2520H3R3MT0S1	
	1.0	4.70 \pm 20%	2	0.130	1000	MLP2520H4R7MT0S1	
	1.2	1.00 \pm 20%	2	0.070	1600	MLP2520H1R0ST0S1	
	1.2	2.20 \pm 20%	2	0.080	1500	MLP2520H2R2ST0S1	
	1.2	4.70 \pm 20%	2	0.130	1000	MLP2520H4R7ST0S1	
	Low core loss	1.0	0.47 \pm 20%	2	0.060	1700	MLP2520VR47MT0S1
		1.0	1.00 \pm 20%	2	0.100	1300	MLP2520V1R0MT0S1
		1.0	1.50 \pm 20%	2	0.100	1400	MLP2520V1R5MT0S1
		1.0	2.20 \pm 20%	2	0.120	1100	MLP2520V2R2MT0S1
1.0		3.30 \pm 20%	2	0.200	900	MLP2520V3R3MT0S1	
1.0		4.70 \pm 20%	2	0.240	800	MLP2520V4R7MT0S1	
1.2		1.00 \pm 20%	2	0.100	1300	MLP2520V1R0ST0S1	
1.2		1.50 \pm 20%	2	0.100	1400	MLP2520V1R5ST0S1	
1.2		2.20 \pm 20%	2	0.120	1100	MLP2520V2R2ST0S1	
1.2		4.70 \pm 20%	2	0.220	800	MLP2520V4R7ST0S1	
STD product		1.0	1.00 \pm 20%	2	0.085	1500	MLP2520S1R0MT0S1
		1.0	1.50 \pm 20%	2	0.090	1200	MLP2520S1R5MT0S1
	1.0	2.20 \pm 20%	2	0.090	1200	MLP2520S2R2MT0S1	
	1.0	3.30 \pm 20%	2	0.130	1000	MLP2520S3R3MT0S1	
	1.0	4.70 \pm 20%	2	0.130	1000	MLP2520S4R7MT0S1	
	1.0	10.00 \pm 20%	2	0.280	700	MLP2520S100MT0S1	
	1.2	1.20 \pm 20%	2	0.080	1500	MLP2520S1R0ST0S1	
	1.2	2.50 \pm 20%	2	0.110	1200	MLP2520S2R2ST0S1	
	1.2	3.30 \pm 20%	2	0.110	1000	MLP2520S3R3ST0S1	
	1.2	4.70 \pm 20%	2	0.110	1000	MLP2520S4R7ST0S1	
	1.2	10.00 \pm 20%	2	0.280	700	MLP2520S100ST0S1	

 Background red: The products has been stopped production.

* Rated current: current assumed when temperature has risen to 40°C max.


Measurement equipment

Measurement item	Product No.	Manufacturer
L	4294A+16034G	Keysight Technologies
DC resistance	Type-755611	Yokogawa

* Equivalent measurement equipment may be used.

MLP2520 type (W characteristic product, T dimension of the product 1.0mm max.)

L FREQUENCY CHARACTERISTICS

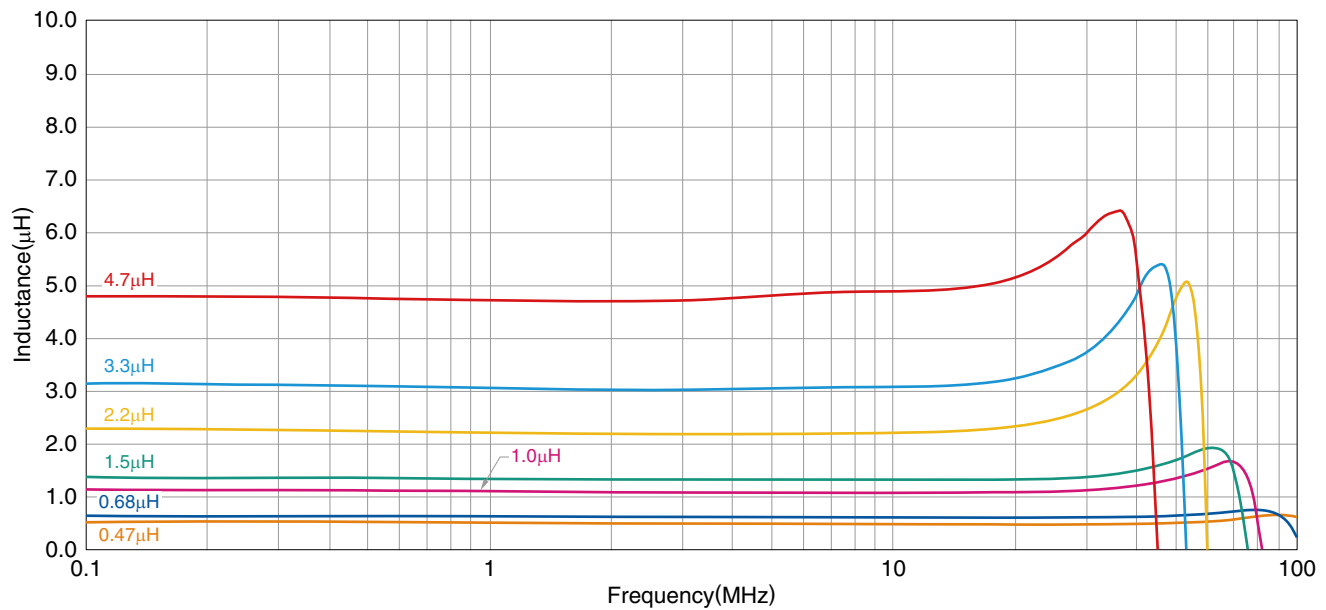


Measurement equipment

Product No.	Manufacturer
4294A+16034G	Keysight Technologies

* Equivalent measurement equipment may be used.

INDUCTANCE VS. DC BIAS CHARACTERISTICS

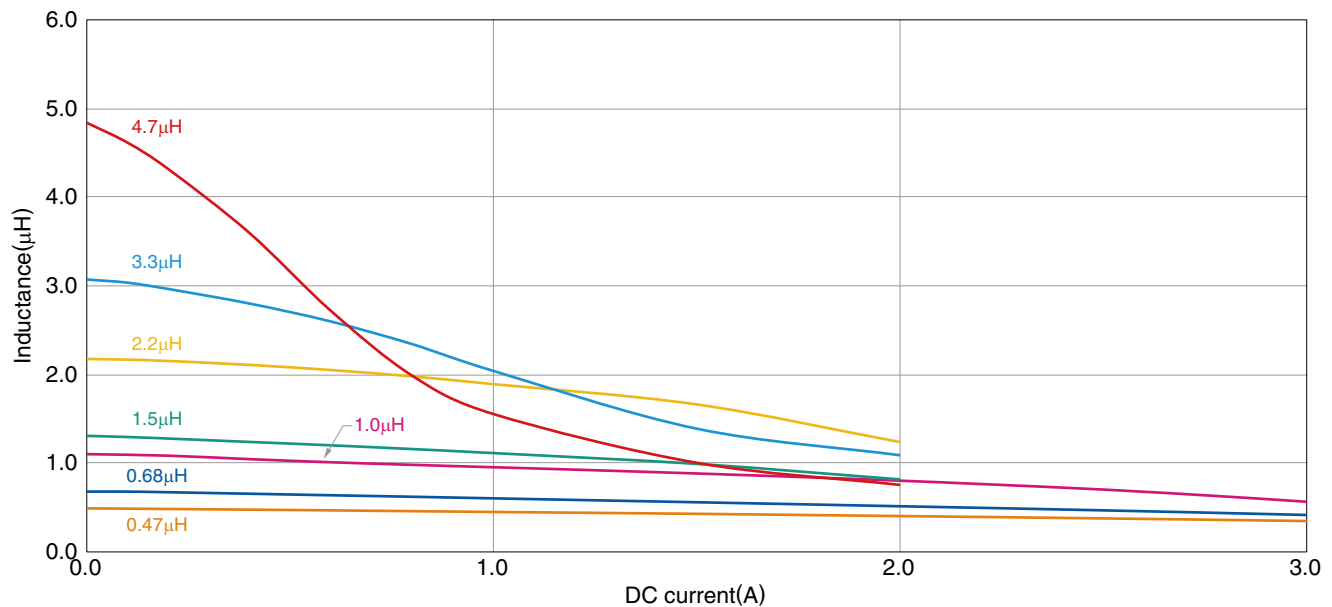


Measurement equipment

Product No.	Manufacturer
4285A+42841A+42842C+42851-61100	Keysight Technologies

* Equivalent measurement equipment may be used.

MLP2520 type (H characteristic product, T dimension of the product 1.0mm max.)

L FREQUENCY CHARACTERISTICS

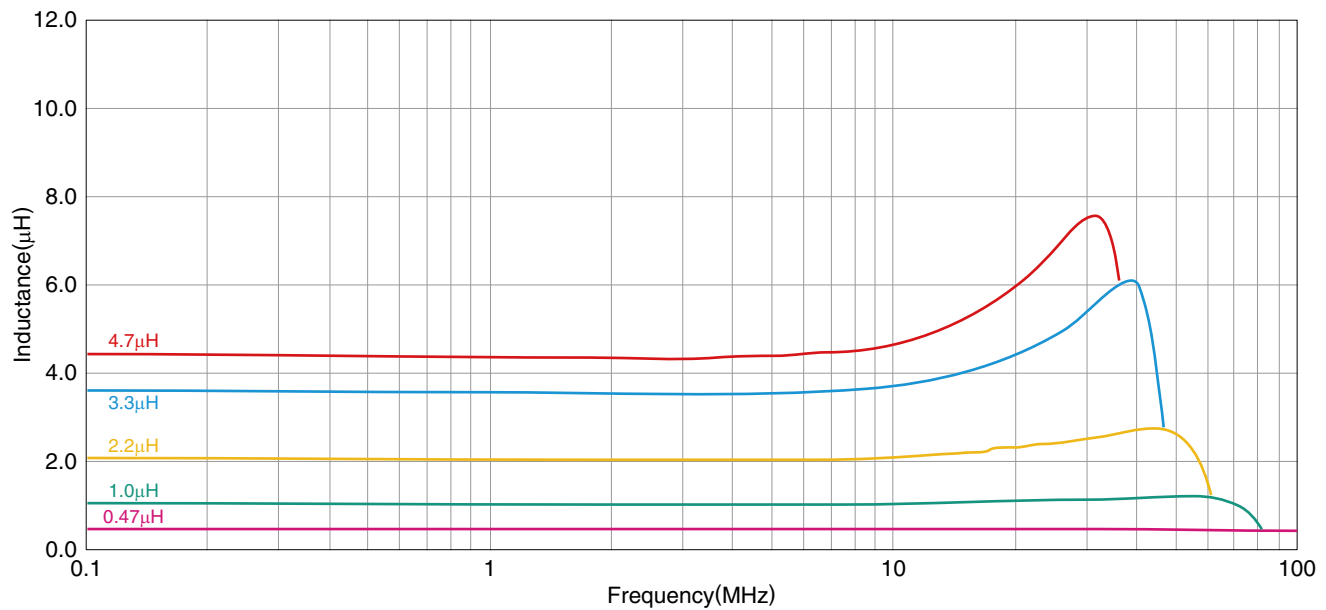


Measurement equipment

Product No.	Manufacturer
4294A+16034G	Keysight Technologies

* Equivalent measurement equipment may be used.

INDUCTANCE VS. DC BIAS CHARACTERISTICS

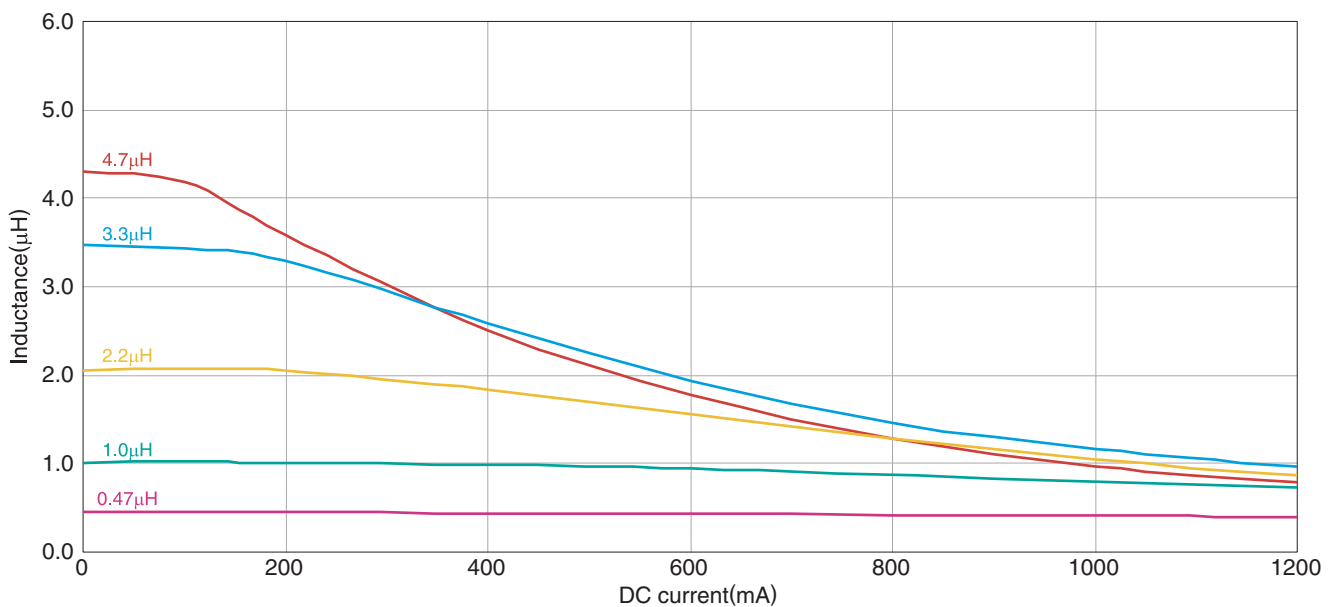


Measurement equipment

Product No.	Manufacturer
4285A+42841A+42842C+42851-61100	Keysight Technologies

* Equivalent measurement equipment may be used.

MLP2520 type (H characteristic product, T dimension of the product 1.2mm max.)

L FREQUENCY CHARACTERISTICS

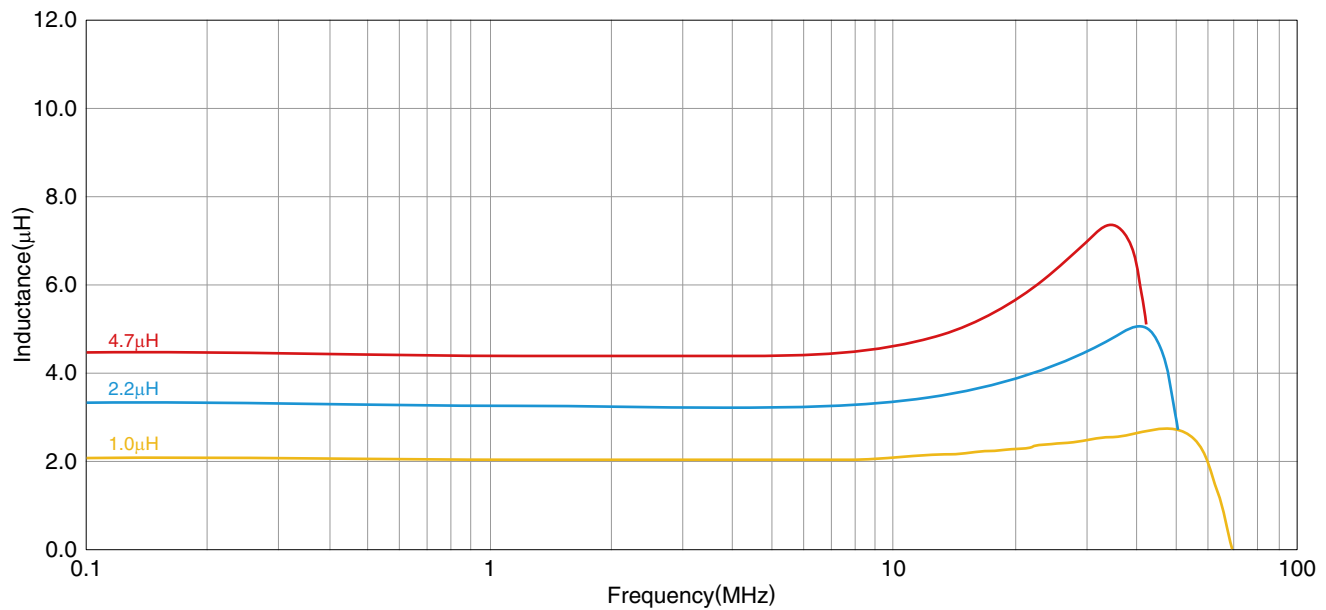


Measurement equipment

Product No.	Manufacturer
4294A+16034G	Keysight Technologies

* Equivalent measurement equipment may be used.

INDUCTANCE VS. DC BIAS CHARACTERISTICS

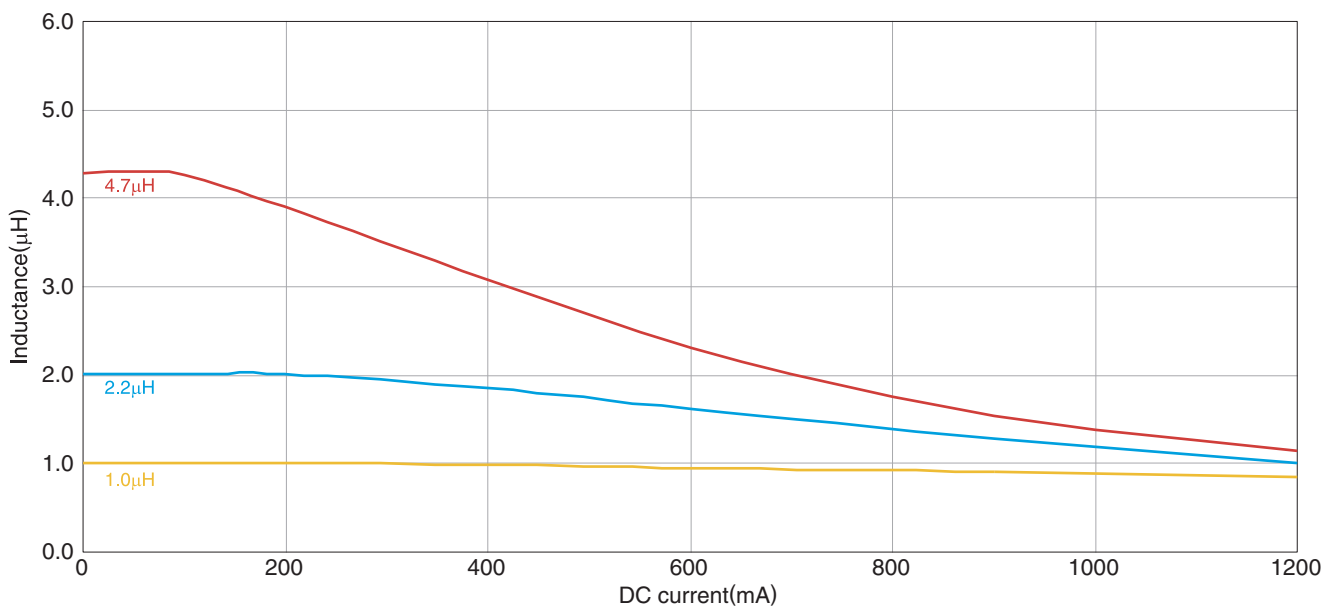


Measurement equipment

Product No.	Manufacturer
4285A+42841A+42842C+42851-61100	Keysight Technologies

* Equivalent measurement equipment may be used.

MLP2520 type (V characteristic product, T dimension of the product 1.0mm max.)

L FREQUENCY CHARACTERISTICS

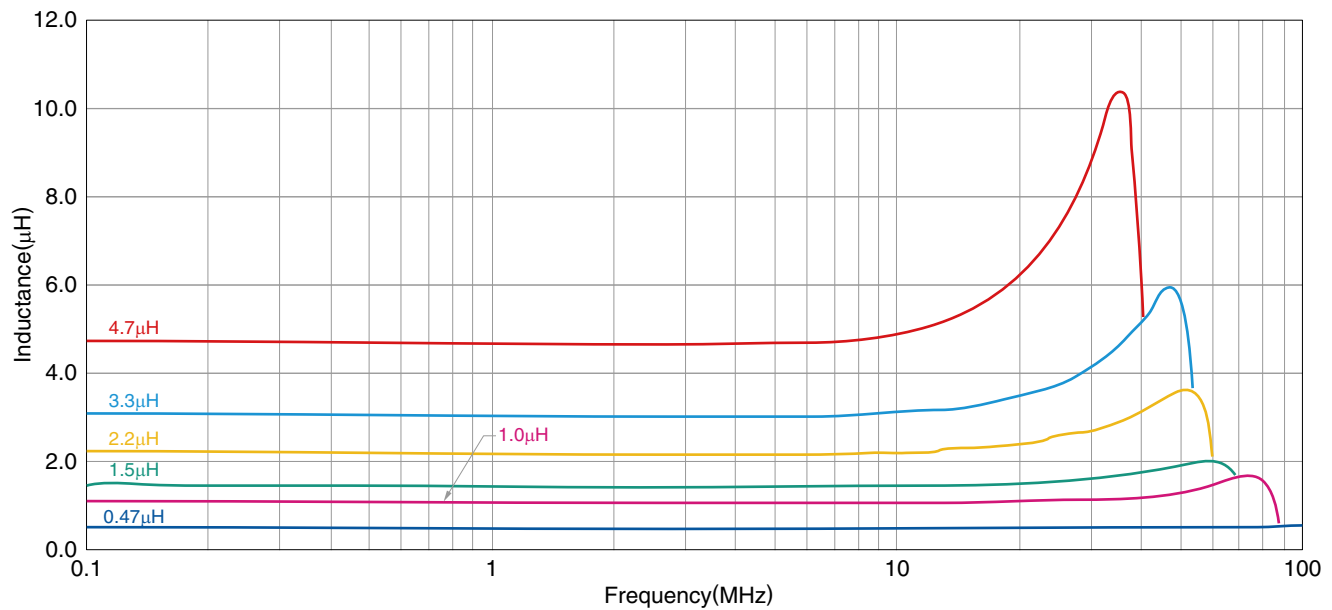


Measurement equipment

Product No.	Manufacturer
4294A+16034G	Keysight Technologies

* Equivalent measurement equipment may be used.

INDUCTANCE VS. DC BIAS CHARACTERISTICS

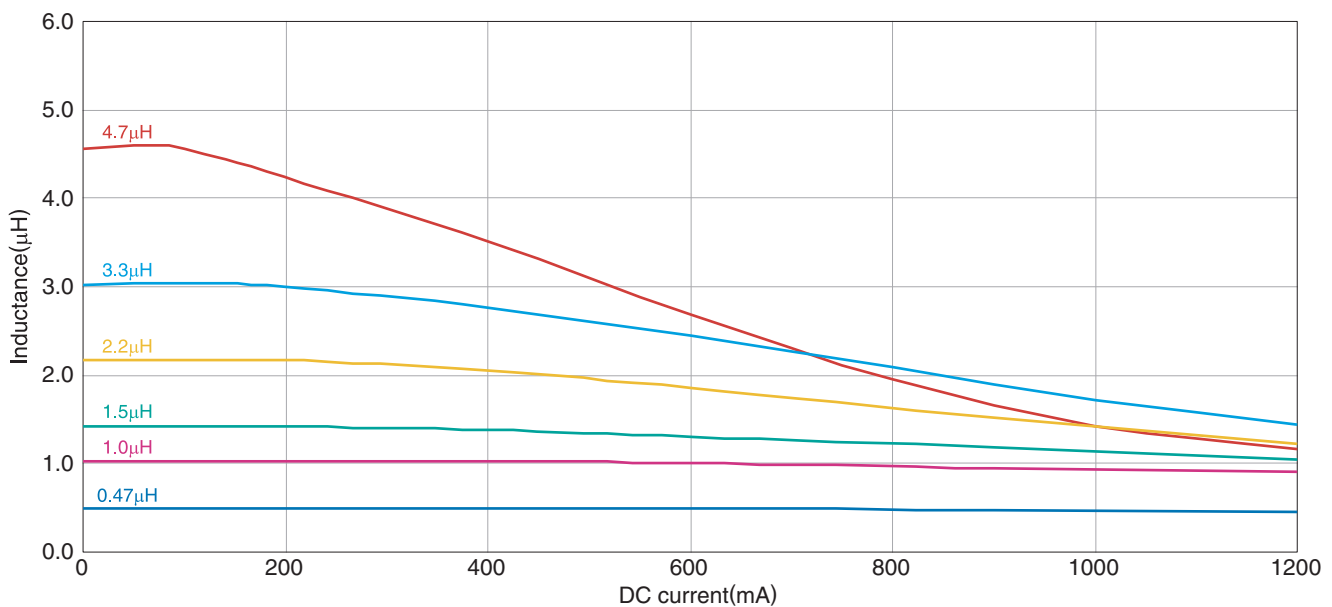


Measurement equipment

Product No.	Manufacturer
4285A+42841A+42842C+42851-61100	Keysight Technologies

* Equivalent measurement equipment may be used.

MLP2520 type (V characteristic product, T dimension of the product 1.2mm max.)

L FREQUENCY CHARACTERISTICS

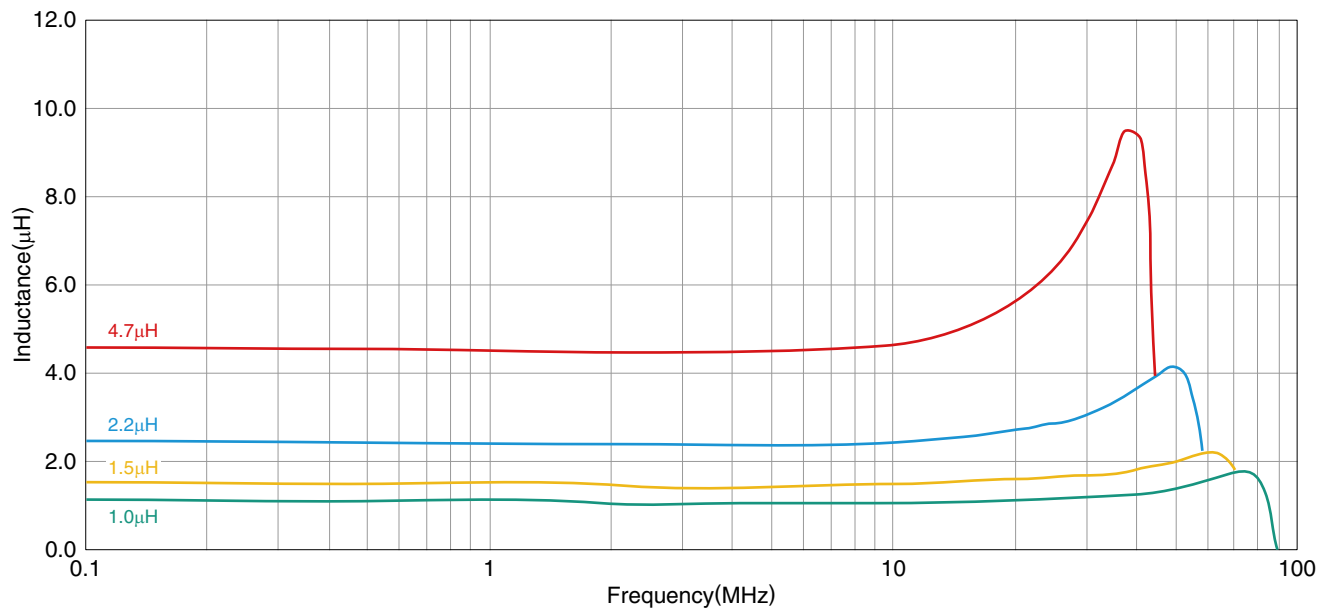


Measurement equipment

Product No.	Manufacturer
4294A+16034G	Keysight Technologies

* Equivalent measurement equipment may be used.

INDUCTANCE VS. DC BIAS CHARACTERISTICS

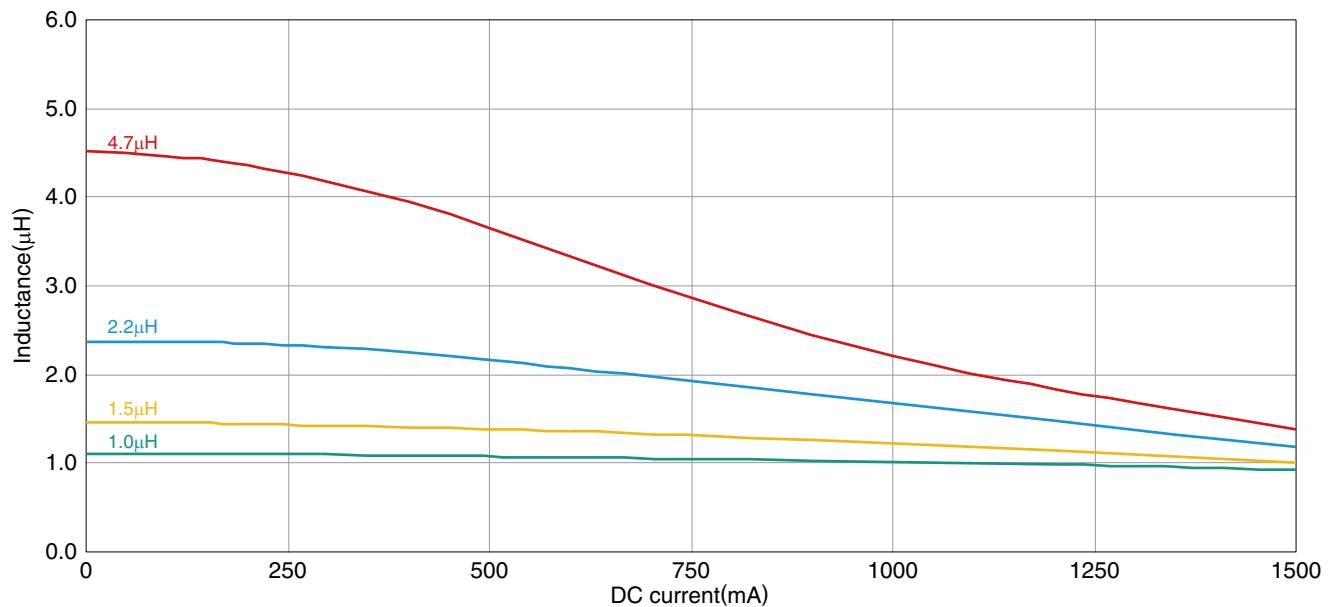


Measurement equipment

Product No.	Manufacturer
4285A+42841A+42842C+42851-61100	Keysight Technologies

* Equivalent measurement equipment may be used.

MLP2520 type (S characteristic product, T dimension of the product 1.0mm max.)

L FREQUENCY CHARACTERISTICS

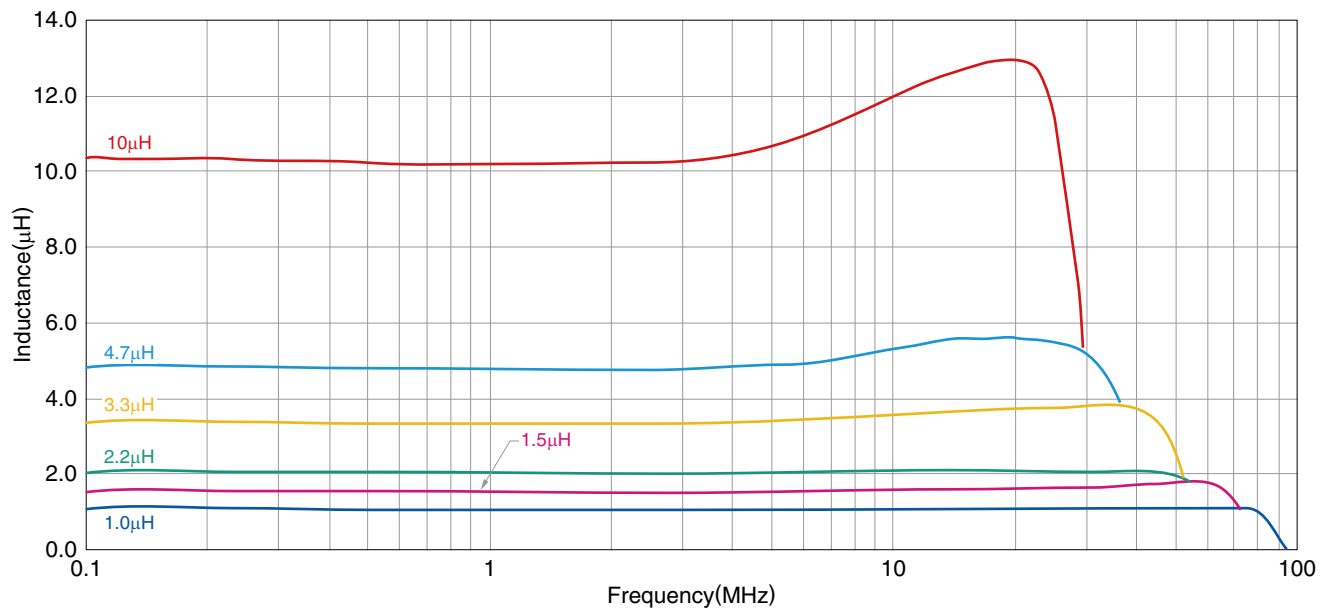


Measurement equipment

Product No.	Manufacturer
4294A+16034G	Keysight Technologies

* Equivalent measurement equipment may be used.

INDUCTANCE VS. DC BIAS CHARACTERISTICS

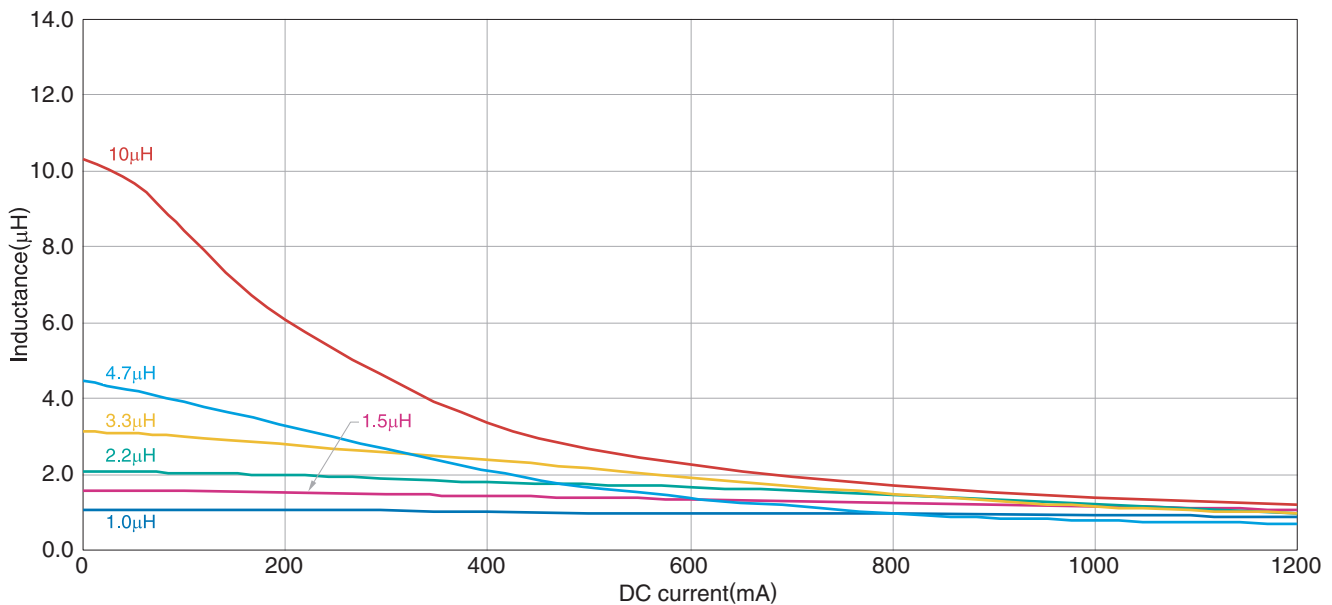


Measurement equipment

Product No.	Manufacturer
4285A+42841A+42842C+42851-61100	Keysight Technologies

* Equivalent measurement equipment may be used.

MLP2520 type (S characteristic product, T dimension of the product 1.2mm max.)

L FREQUENCY CHARACTERISTICS

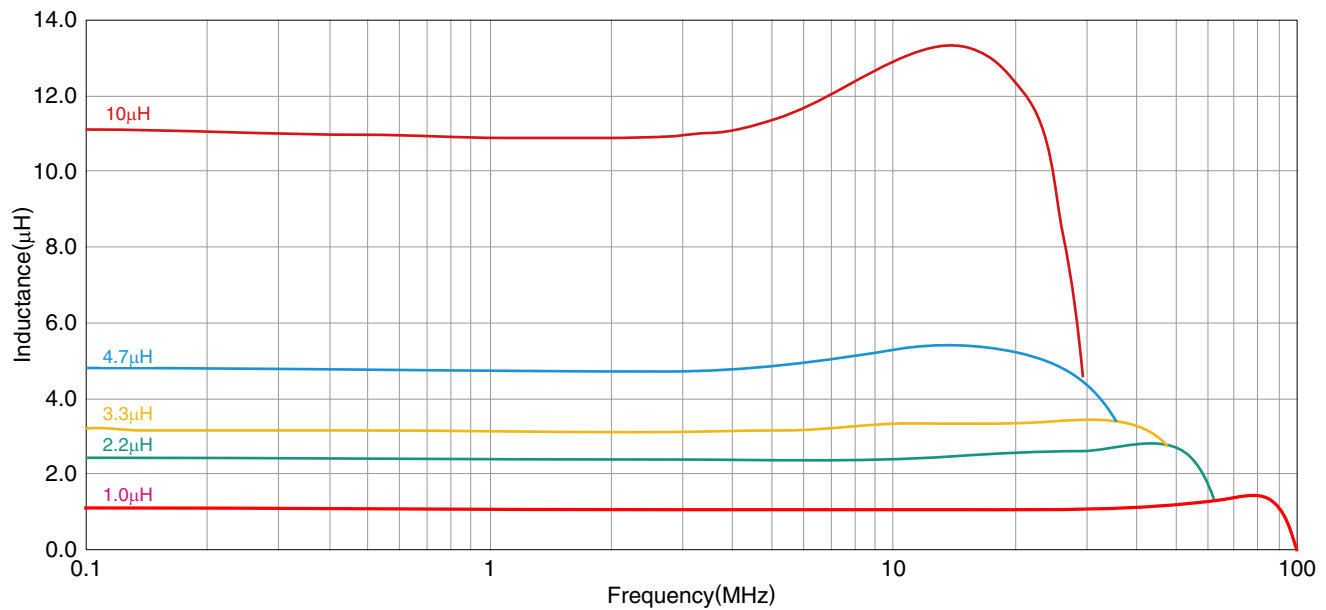


Measurement equipment

Product No.	Manufacturer
4294A+16034G	Keysight Technologies

* Equivalent measurement equipment may be used.

INDUCTANCE VS. DC BIAS CHARACTERISTICS

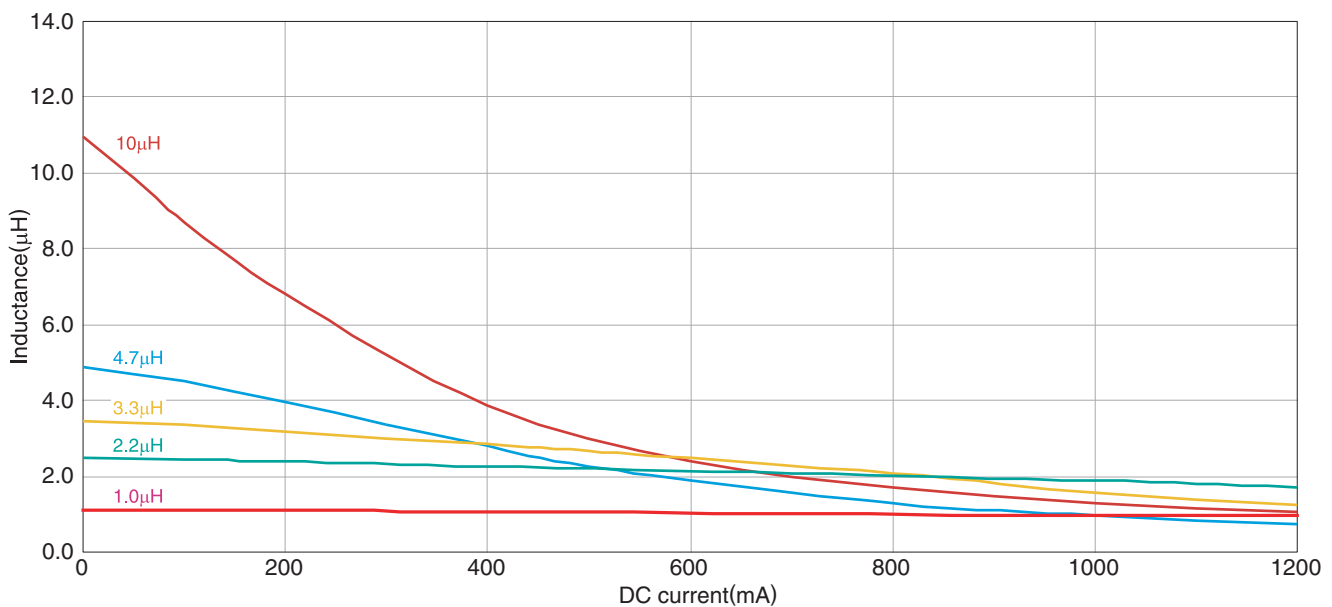

Measurement equipment


Product No.	Manufacturer
4285A+42841A+42842C+42851-61100	Keysight Technologies

* Equivalent measurement equipment may be used.


MLP2520 type

■ SHAPE & DIMENSIONS


□ t=1.0mm max.

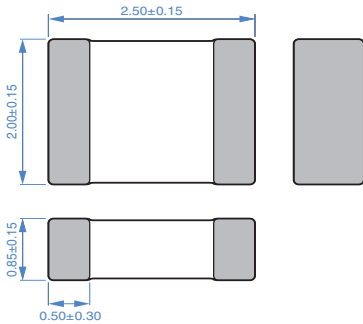


□ t=1.2mm max.

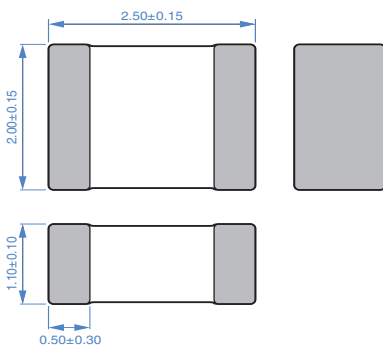

■ RECOMMENDED LAND PATTERN




■ RECOMMENDED REFLOW PROFILE

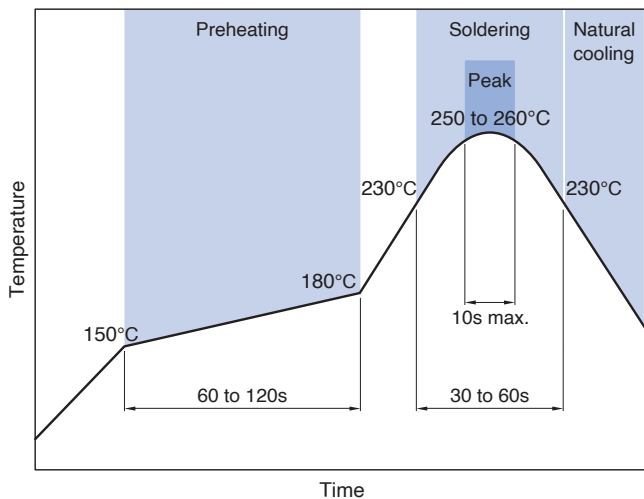


■ PACKAGING STYLE


□ REEL DIMENSIONS

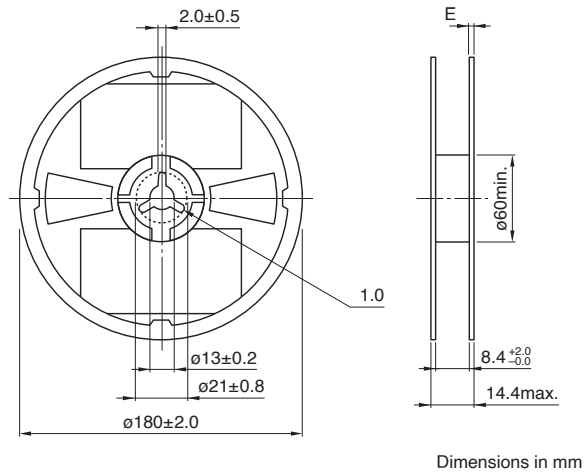

□ TAPE DIMENSIONS

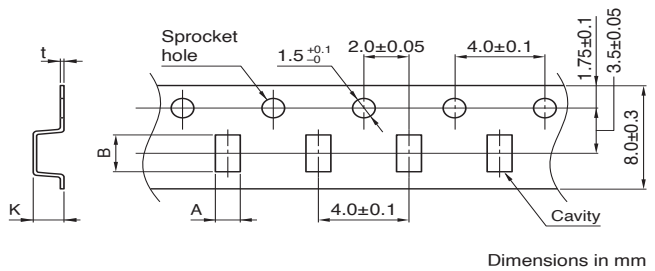

Type	A	B	K	
MLP2520	t=1.0	2.3±0.1	2.7±0.1	1.2 max.
	t=1.2	2.3±0.1	2.7±0.1	1.5 max.

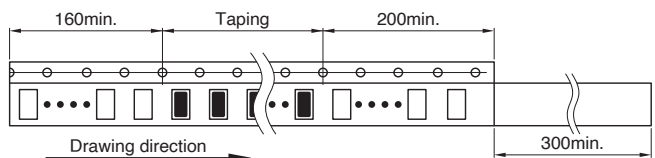

□ PACKAGE QUANTITY

Package quantity	3000 pcs/reel
------------------	---------------

■ TEMPERATURE RANGE, INDIVIDUAL WEIGHT

Type	Operating temperature range *	Storage temperature range **	Individual weight
t=1.0	-40 to +125 °C	-40 to +85 °C	15 mg
t=1.2	-40 to +125 °C	-40 to +85 °C	25 mg

* Operating temperature range includes self-temperature rise.

** The storage temperature range is for after the assembly.

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products

REMINDERS

- The storage period is within 12 months. Be sure to follow the storage conditions (temperature: 5 to 40°C, humidity: 10 to 75% RH or less).
If the storage period elapses, the soldering of the terminal electrodes may deteriorate.
- Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
- Before soldering, be sure to preheat components.
The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.
If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Carefully lay out the coil for the circuit board design of the non-magnetic shield type.
A malfunction may occur due to magnetic interference.
- Use a wrist band to discharge static electricity in your body through the grounding wire.
- Do not expose the products to magnets or magnetic fields.
- Do not use for a purpose outside of the contents regulated in the delivery specifications.
- The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.
The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.
If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.

- | | |
|---|--|
| (1) Aerospace/aviation equipment | (7) Transportation control equipment |
| (2) Transportation equipment (cars, electric trains, ships, etc.) | (8) Public information-processing equipment |
| (3) Medical equipment | (9) Military equipment |
| (4) Power-generation control equipment | (10) Electric heating apparatus, burning equipment |
| (5) Atomic energy-related equipment | (11) Disaster prevention/crime prevention equipment |
| (6) Seabed equipment | (12) Safety equipment |
| | (13) Other applications that are not considered general-purpose applications |

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.