

SS29L RVG Datasheet

www.digi-electronics.com



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	SS29L RVG-DG
Manufacturer	Taiwan Semiconductor Corporation
Manufacturer Product Number	SS29L RVG
Description	DIODE SCHOTTKY 90V 2A SUB SMA
Detailed Description	Diode 90 V 2A Surface Mount Sub SMA

This model SS29L RVG is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

SS29L RVG

Series:

-

Technology:

Schottky

Current - Average Rectified (Io):

2A

Speed:

Fast Recovery =< 500ns, > 200mA (Io)

Capacitance @ Vr, F:

-

Package / Case:

DO-219AB

Operating Temperature - Junction:

-55°C ~ 150°C

Manufacturer:

Taiwan Semiconductor Corporation

Product Status:

Active

Voltage - DC Reverse (Vr) (Max):

90 V

Voltage - Forward (Vf) (Max) @ If:

850 mV @ 2 A

Current - Reverse Leakage @ Vr:

100 µA @ 90 V

Mounting Type:

Surface Mount

Supplier Device Package:

Sub SMA

Base Product Number:

SS29

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8541.10.0080

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

2A, 20V - 150V Schottky Barrier Surface Mount Rectifier

FEATURES

- Low power loss, high efficiency
- Ideal for automated placement
- Guard ring for overvoltage protection
- High surge current capability
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21

APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- DC to DC converters

MECHANICAL DATA

- Case: Sub SMA
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Polarity: Indicated by cathode band
- Weight: 0.019g (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
I_F	2	A
V_{RRM}	20 - 150	V
I_{FSM}	50	A
T_{JMAX}	125, 150	°C
Package	Sub SMA	
Configuration	Single die	



Sub SMA



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)											
PARAMETER	SYMBOL	SS 22L	SS 23L	SS 24L	SS 25L	SS 26L	SS 29L	SS 210L	SS 215L	UNIT	
Marking code on the device		22L	23L	24L	25L	26L	29L	20L	2AL		
Repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	90	100	150	V	
Reverse voltage, total rms value	$V_{R(RMS)}$	14	21	28	35	42	63	70	105	V	
Forward current	I_F	2								A	
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	50								A	
Critical rate of rise of off-state voltage	dv/dt	10,000								V/ μs	
Junction temperature	T_J	- 55 to +125			- 55 to +150					°C	
Storage temperature	T_{STG}	- 55 to +150									°C

THERMAL PERFORMANCE			
PARAMETER	SYMBOL	TYP	UNIT
Junction-to-lead thermal resistance	$R_{\theta JL}$	17	°C/W
Junction-to-ambient thermal resistance	$R_{\theta JA}$	75	°C/W

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)						
PARAMETER		CONDITIONS	SYMBOL	TYP	MAX	UNIT
Forward voltage ⁽¹⁾	SS22L SS23L SS24L	$I_F = 2\text{A}, T_J = 25^\circ\text{C}$	V_F	-	0.50	V
	SS25L SS26L			-	0.70	V
	SS29L SS210L			-	0.85	V
	SS215L			-	0.95	V
Reverse current @ rated V_R ⁽²⁾	SS22L SS23L SS24L SS25L SS26L	$T_J = 25^\circ\text{C}$	I_R	-	400	μA
	SS29L SS210L SS215L			-	100	μA
	SS22L SS23L SS24L	$T_J = 100^\circ\text{C}$		-	15	mA
	SS25L SS26L			-	10	mA
	SS29L SS210L SS215L			-	-	mA
	SS22L SS23L SS24L	$T_J = 125^\circ\text{C}$		-	-	mA
	SS25L SS26L			-	-	mA
	SS29L SS210L SS215L			-	5	mA

Notes:

1. Pulse test with $PW = 0.3\text{ms}$
2. Pulse test with $PW = 30\text{ms}$

ORDERING INFORMATION		
ORDERING CODE⁽¹⁾	PACKAGE	PACKING
SS2xL	Sub SMA	10,000 / Tape & Reel

Notes:

1. "x" defines voltage from 20V(SS22L) to 150V(SS215L)

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

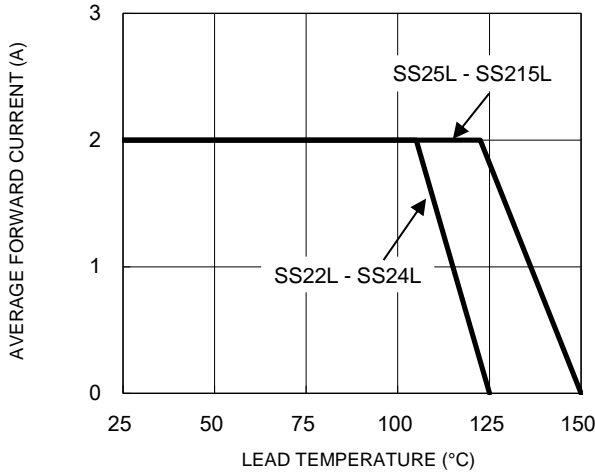


Fig.2 Typical Junction Capacitance

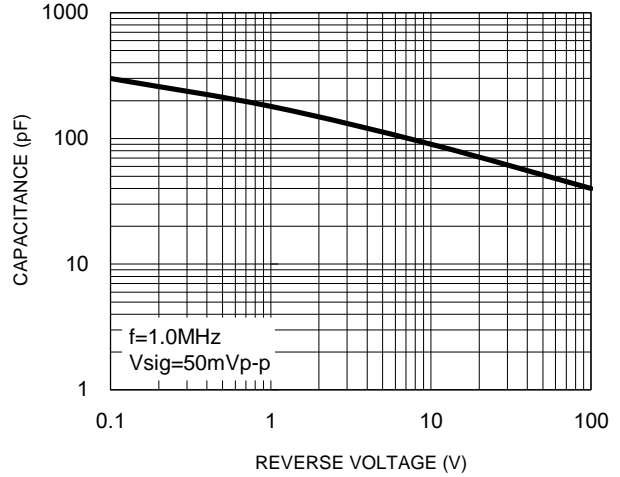


Fig.3 Typical Reverse Characteristics

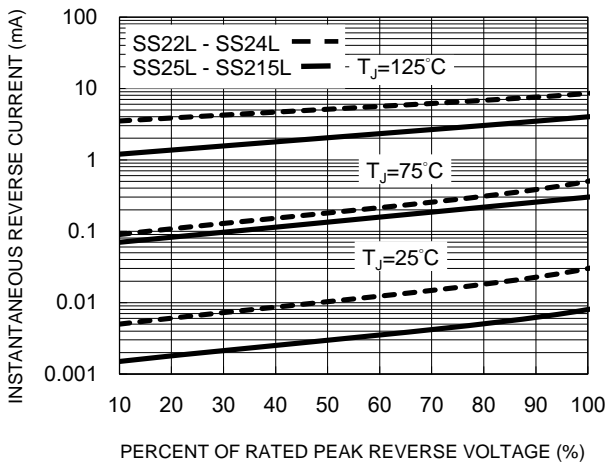


Fig.4 Typical Forward Characteristics



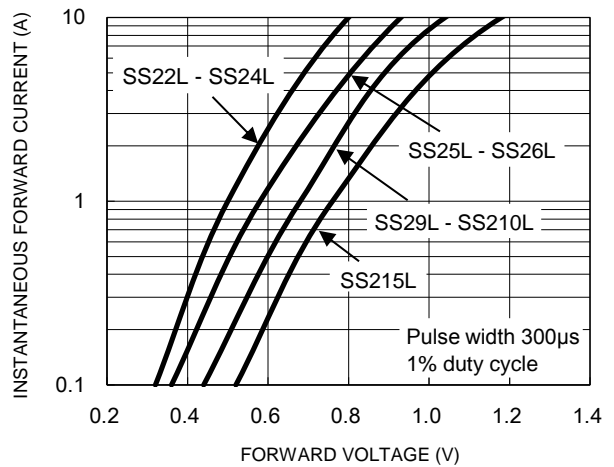



Fig.5 Maximum Non-Repetitive Forward Surge Current

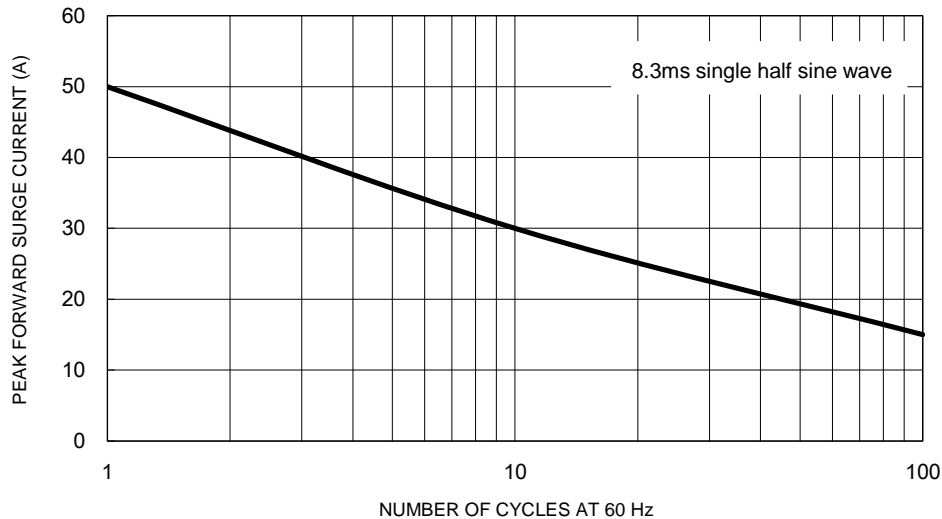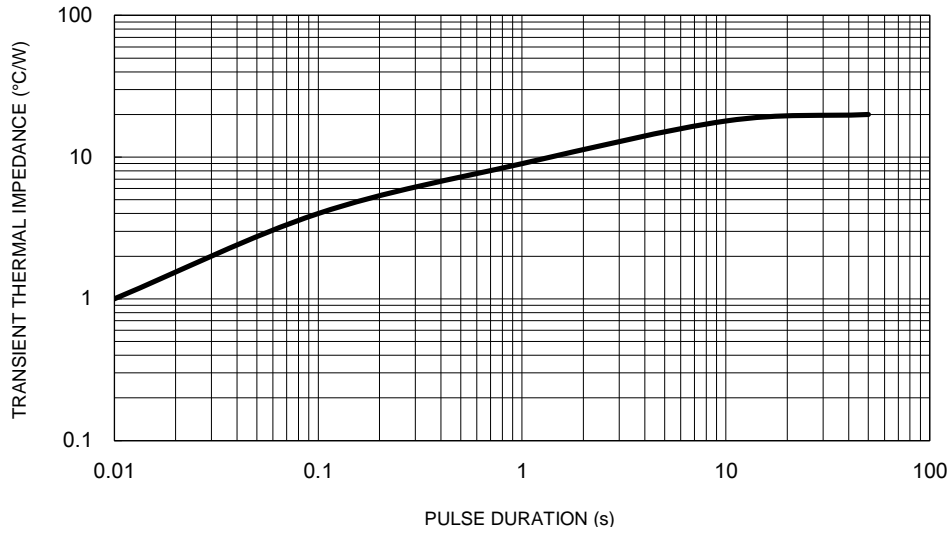

CHARACTERISTICS CURVES $(T_A = 25^\circ\text{C}$ unless otherwise noted)**Fig.6 Typical Transient Thermal Impedance**


PACKAGE OUTLINE DIMENSIONS

Sub SMA

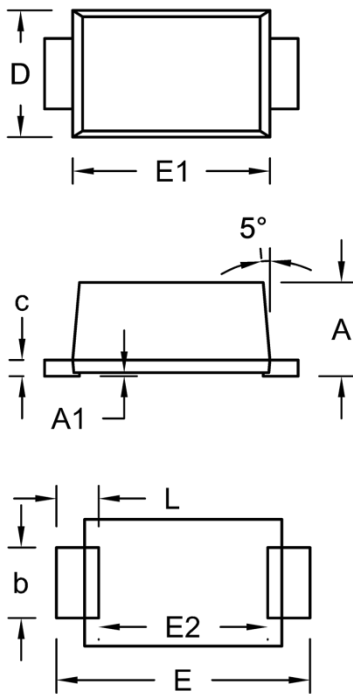

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	1.23	1.43	0.048	0.056
A1	0.00	0.10	0.000	0.004
b	0.80	1.20	0.031	0.047
c	0.16	0.30	0.006	0.012
D	1.70	1.90	0.067	0.075
E	3.40	3.80	0.134	0.150
E1	2.70	2.90	0.106	0.114
E2	2.45	2.60	0.096	0.102
L	0.35	0.85	0.014	0.033

SUGGESTED PAD LAYOUT

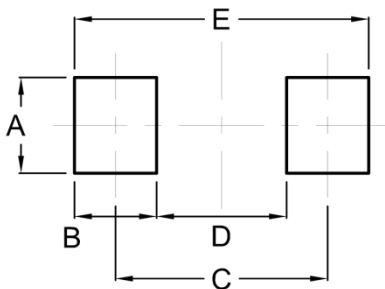

Symbol	Unit (mm)	Unit (inch)
A	1.40	0.055
B	1.20	0.047
C	3.10	0.122
D	1.90	0.075
E	4.30	0.169

MARKING DIAGRAM



P/N = Marking Code
 G = Green Compound
 YW = Date Code
 F = Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.