


# PLED6SW Datasheet

[www.digi-electronics.com](http://www.digi-electronics.com)

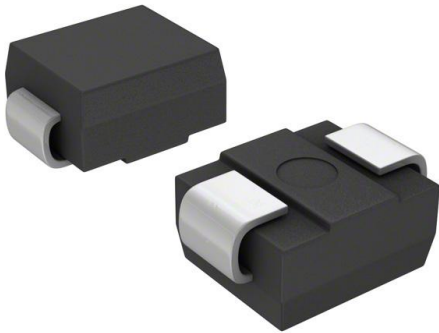

<https://www.DiGi-Electronics.com>

|                              |  |
|------------------------------|--|
| DiGi Electronics Part Number | PLED6SW-DG                                     |
| Manufacturer                 | <a href="#">Littelfuse Inc.</a>                |
| Manufacturer Product Number  | PLED6SW  |
| Description                  | LIGHT PROTECTOR LED SHUNT 6V SMD               |
| Detailed Description         | Lighting Protection LED Shunt 6V Surface Mount |

This model PLED6SW is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

PLED6SW

Series:

PLED®

Voltage - Clamping:

16 V

Technology:

LED Shunt

Applications:

LED Protection

Package / Case:

DO-214AA, SMB

Manufacturer:

Littelfuse Inc.

Product Status:

Obsolete

Voltage:

6V

Number of Circuits:

1

Mounting Type:

Surface Mount

Supplier Device Package:

DO-214AA

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

ECCN:

EAR99

Moisture Sensitivity Level (MSL):

1 (Unlimited)

HTSUS:

8541.30.0080

## PLEDxSW Series - White Body



**OBSOLETE** DATE: 03/26/2020 PCN/ECN# 41325  
REPLACED BY: PLED series



### Description

PLEDxSW Series open LED protectors provide a switching electronic shunt path when an LED in an LED string fails as an open circuit. This ensures that the remaining string of LEDs will continue to function if a single LED does not.


PLEDxSW Series devices were designed to enable higher reliability in indoor LED lighting applications such as advertisement lighting and other applications. Additionally, they are molded from white material to make them less visible in the LED fixture and the white molding also reflects more light to improve overall light engine efficiency.

Compatible with one, two and three watt LEDs that have a nominal 3V forward characteristic, PLEDxSW Series devices are available in SMB surface mount package. The DO-214AA (SMB) low profile package is ideal for dense board applications.

### Agency Approvals

| Agency | Agency File Number |
|--------|--------------------|
|        | E133083            |

### Schematic Symbol

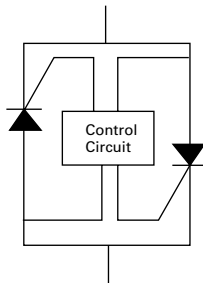


### Features & Benefits

- Fast switching
- Automatically resets after power cycle
- Low profile, small foot print standard DO-214AA package
- Compatible with industrial lighting environments
- Compatible with PWM frequencies up to 30 kHz
- RoHS compliant and halogen-free

### Electrical Characteristics (All parameters are measured at T=25°C unless otherwise noted)

| Part Number | Marking | $V_{BR}$ breakdown |     | $V_{DRM}$ breakdown | $I_H$ | $I_S$ | $I_T @ V_T$ | $V_T @ I_T = 1$ Amp | Critical rate of rise dV/dt |
|-------------|---------|--------------------|-----|---------------------|-------|-------|-------------|---------------------|-----------------------------|
|             |         | Volts              |     | Volts               | mAmps | mAmps | Amps        | Volts               | Volts                       |
|             |         | Min                | Max | Min                 | Min   | Max   | Max         | Max                 | Max                         |
| PLED6SW     | PL6     | 6                  | 16  | 6                   | 5     | 100   | 1.0         | 1.2                 | 250V/μs                     |
| PLED9SW     | PL9     | 9                  | 18  | 9                   |       |       |             |                     |                             |
| PLED13SW    | PL13    | 13                 | 26  | 13                  |       |       |             |                     |                             |
| PLED18SW    | PL18    | 18                 | 33  | 18                  |       |       |             |                     |                             |

### Thermal Considerations

| Package  | Symbol          | Parameter                               | Value  | Unit |
|--|-----------------|---|--|------|
| DO-214AA in White<br> | $T_J$           | Operating Junction Temperature Range    | -40 to +150  | °C   |
|  | $T_S$           | Storage Temperature Range               | -65 to +150  | °C   |
|  | $R_{\theta JA}$ | Thermal Resistance: Junction to Ambient | DO-214AA: 90 <sup>1</sup><br>DO-214AA: 40 <sup>2</sup> | °C/W |

**Notes:**

1) Standard FR-4 PCB with Copper Pads (Recommended Size)

2) Aluminum PCB

Thickness: 1.6mm


Grade: 1-2 W/mK Thermal Conductivity

Trace thickness: 2 oz


Insulation layer thickness: 215  $\mu$ m

Solder Pad Dimensions: 2.0mm x 2.8mm (Recommended Size)


### V-I Characteristics

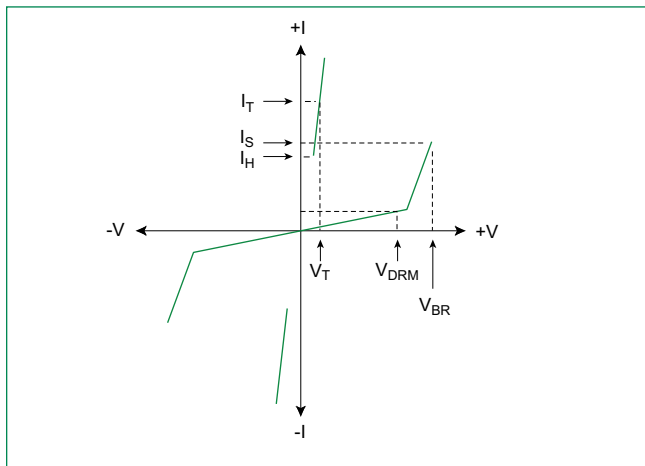


### $V_{BR}$ vs. Junction Temperature

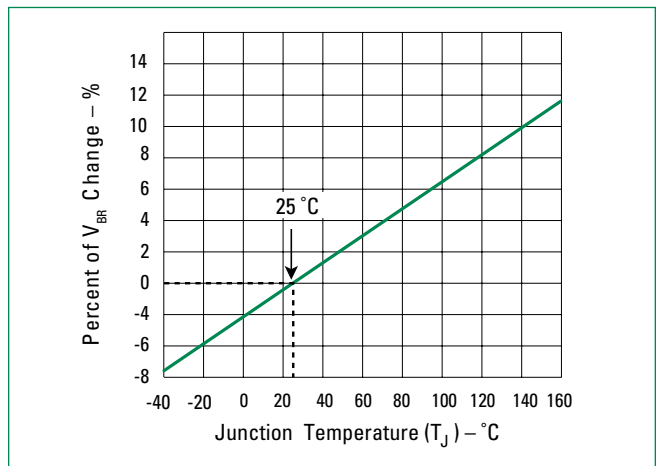


### Normalized DC Holding Current vs. Case Temperature

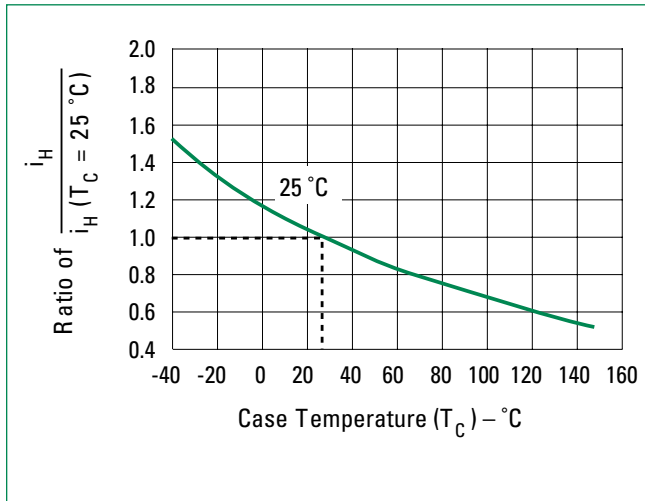


### LED Interference Test Circuit

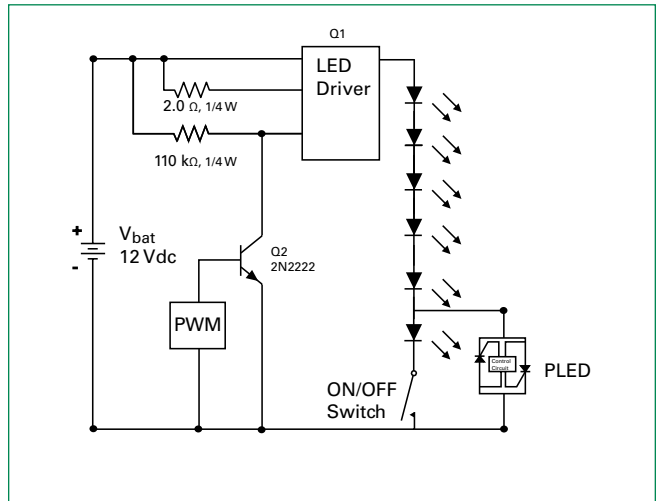

**6 LEDs in Series 50% Duty Cycle 10kHz**

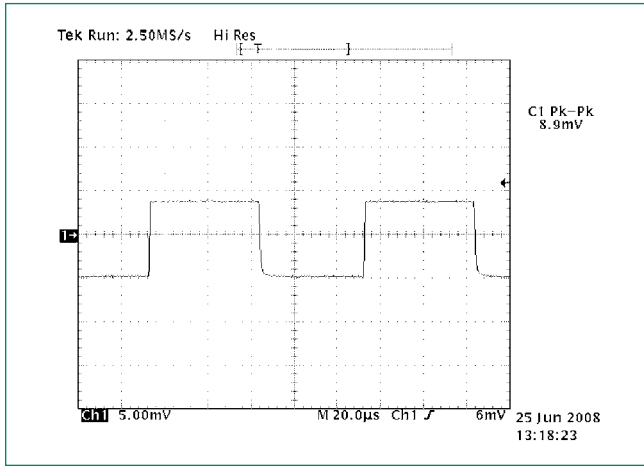


**5 LEDs and 1 PLED in Series 50% Duty Cycle 10kHz**

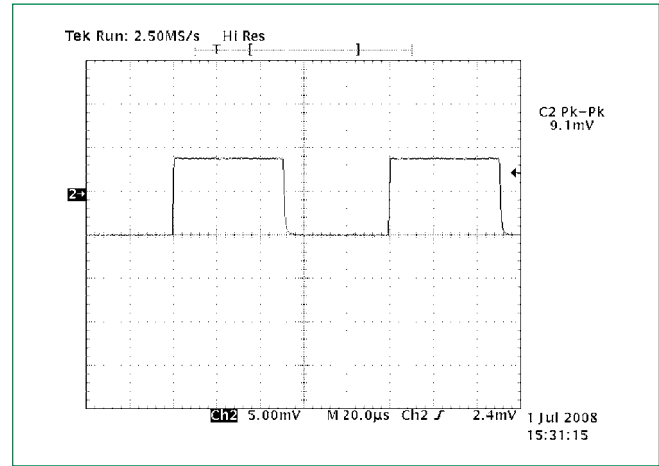


Note: These two graphs show the current magnitude through the LED string with and without the PLED included. There is no noticeable effect on the LED current magnitude when the PLED is included in the circuit as compared to the LED current magnitude when the PLED is not in the circuit. (The conversion factor for the test measurement in the graphs above is 10mA/mV for the Pearson coil measurement, therefore, the current magnitude in the first figure is 10mA\*8.9 = 89mA, while the second figure is 91mA.)

**PLED in the Off-State 10kHz**

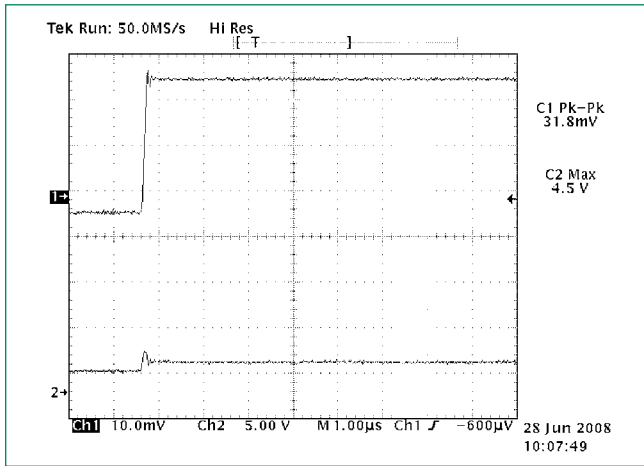

Channel 1: current through LEDs (318 mA)  
Channel 2: voltage across PLED device (4.5 V)


**PLED device zeners and then turns fully on 10kHz**

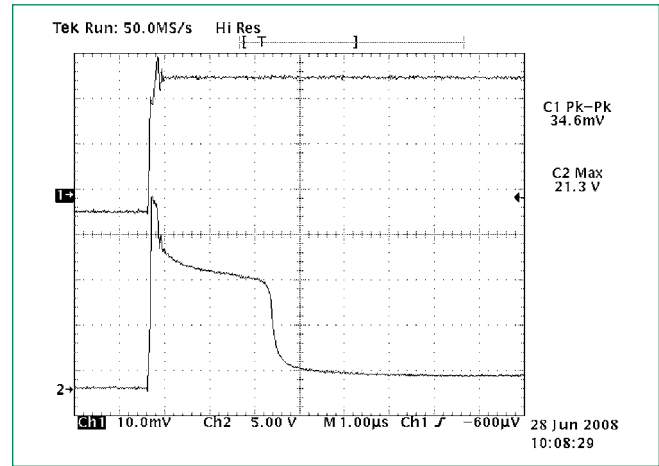

Channel 1: current through LEDs (346 mA) and PLED device once it is fully turned on 2.5 µsec later  
Channel 2: voltage across PLED device (21.3 V before PLED crowbars with 2V drop)

### Soldering Parameters

|  |                                    |                         |
|--|------------------------------------|-------------------------|
| Reflow Condition                                       |                                    | Pb – Free assembly      |
| Pre Heat   | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|  | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|  | - Time (min to max) ( $t_s$ )      | 60 – 180 secs           |
| Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak) |                                    | 3°C/second max          |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                   |                                    | 3°C/second max          |
| Reflow   | - Temperature ( $T_L$ ) (Liquidus) | 217°C                   |
|  | - Temperature ( $t_L$ )            | 60 – 150 seconds        |
| Peak Temperature ( $T_p$ )                             |                                    | 260 <sup>+0/-5</sup> °C |
| Time within 5°C of actual peak Temperature ( $t_p$ )   |                                    | 30 seconds              |
| Ramp-down Rate   |                                    | 6°C/second max          |
| Time 25°C to peak Temperature ( $T_p$ )                |                                    | 8 minutes max           |
| Do not exceed  |                                    | 260°C                   |

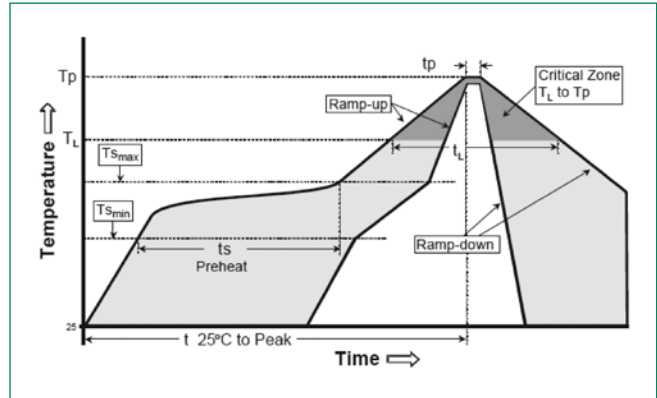


### Physical Specifications

|                          |   |
|--------------------------|---|
| <b>Terminal Material</b> | Copper Alloy  |
| <b>Terminal Finish</b>   | 100% Matte Tin Plated   |
| <b>Body Material</b>     | UL recognized epoxy meeting flammability classification 94V-0 |

### Environmental Specifications


|  |  |
|--|--|
| <b>High Temperature Voltage Blocking</b> | MIL-STD-750: Method 1040, Condition A<br>80% min $V_{DRM}$ (VAC-peak), 150°C,<br>504 hours |
| <b>Temperature Cycling</b>               | MIL-STD-750: Method 1051<br>-65°C to 150°C, 15-minute dwell,<br>100 cycles                 |
| <b>Biased Temperature &amp; Humidity</b> | EIA/JEDEC: JESD22-A101<br>80% $V_{DRM}$ , 85°C, 85%RH, 1008 hours                          |
| <b>High Temperature Storage</b>          | MIL-STD-750: Method 1031<br>150°C, 1008 hours  |
| <b>Low Temperature Storage</b>           | -65°C, 1008 hours  |
| <b>Thermal Shock</b>                     | MIL-STD-750: Method 1056<br>0°C to 100°C, 5-minute dwell,<br>10-second transfer, 10 cycles |
| <b>Resistance to Solder Heat</b>         | MIL-STD-750: Method 2031<br>260°C, 10 seconds  |

### Part Numbering System

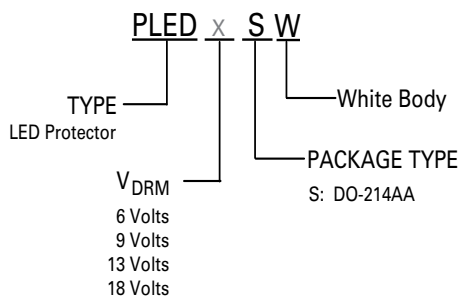

### Part Marking System


DO-214AA



### Packaging

| Package | Description | Packaging Quantity | Industry Standard |
|---------|-------------|--------------------|-------------------|
| S       | DO-214AA    | 2500               | EIA-481-1         |

**Dimensions - DO-214 AA Package**

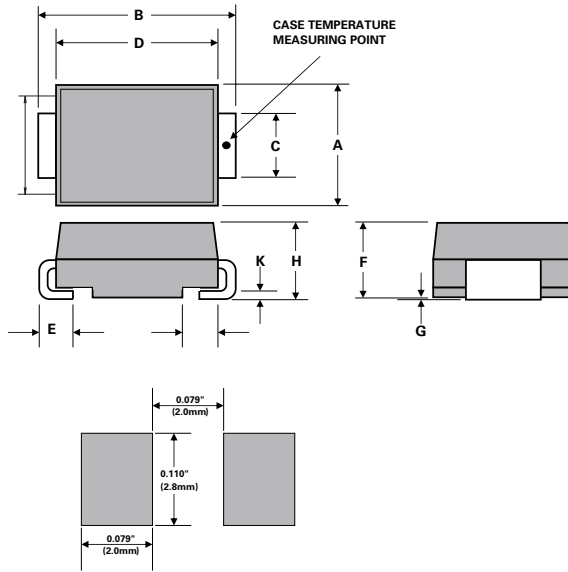


| Dimensions | Inches |       | Millimeters |      |
|------------|--------|-------|-------------|------|
|            | Min    | Max   | Min         | Max  |
| A          | 0.130  | 0.156 | 3.30        | 3.95 |
| B          | 0.201  | 0.220 | 5.10        | 5.60 |
| C          | 0.077  | 0.087 | 1.95        | 2.20 |
| D          | 0.159  | 0.181 | 4.05        | 4.60 |
| E          | 0.030  | 0.063 | 0.75        | 1.60 |
| F          | 0.075  | 0.096 | 1.90        | 2.45 |
| G          | 0.002  | 0.008 | 0.05        | 0.20 |
| H          | 0.077  | 0.104 | 1.95        | 2.65 |
| K          | 0.006  | 0.016 | 0.15        | 0.41 |

Recommended solder pad layout  
(Reference Only)

**DO-214AA Embossed Carrier Reel Pack (RP)**

Meets all EIA-481-1 Standards

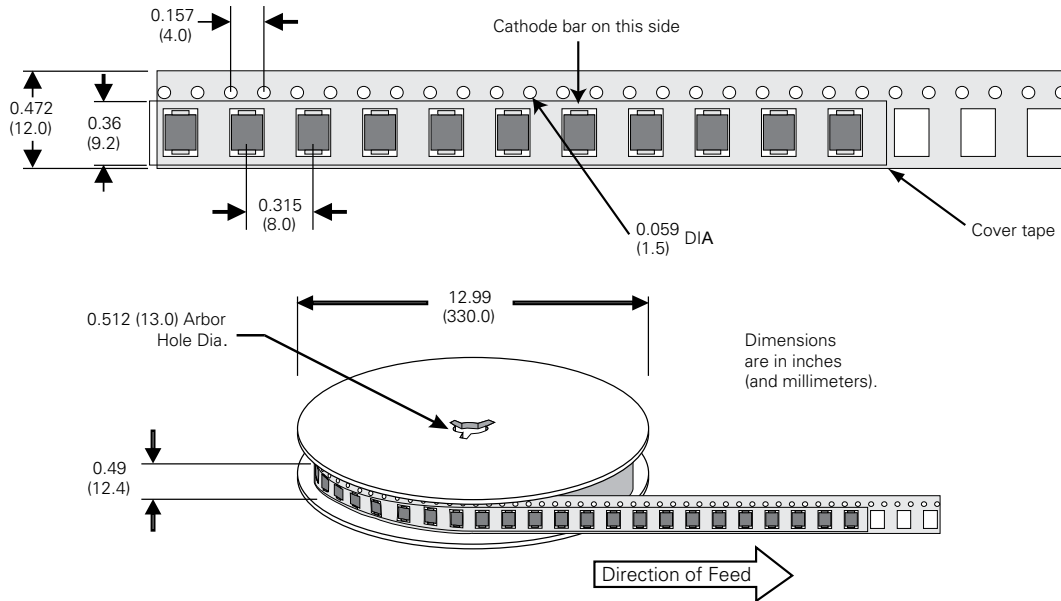

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.