

MF52F104F4150 Datasheet



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	MF52F104F4150-DG
Manufacturer	Cantherm
Manufacturer Product Number	MF52F104F4150
Description	THERM NTC 100KOHM 4150K BEAD
Detailed Description	NTC Thermistor 100k Bead

This model MF52F104F4150 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

MF52F104F4150

Series:

MF52

Resistance in Ohms @ 25°C:

100k

B Value Tolerance:

±1%

B25/50:

4150K

B25/85:

-

Operating Temperature:

-55°C ~ 125°C

Length - Lead Wire:

-

Package / Case:

Bead

Manufacturer:

Cantherm

Product Status:

Active

Resistance Tolerance:

±1%

B0/50:

-

B25/75:

-

B25/100:

-

Power - Max:

50 mW

Mounting Type:

Through Hole

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8533.40.8070

Moisture Sensitivity Level (MSL):

Not Applicable

ECCN:

EAR99

MF52



CANTHERM

Supplying high-quality bimetal and thermal sensor products.




**Pearl-Shaped Precision
NTC Thermistor
for Temperature Measurement**

MF52




Pearl-Shaped Precision NTC Thermistor for Temperature Measurement. The MF52 series is ethoxyline resin coated. The small size is made possible by new materials and manufacturing methods which provide the benefit of close tolerances and fast response. MF52 thermistors are available with 5 lead styles in standard or custom lengths.

Dimensions (mm)

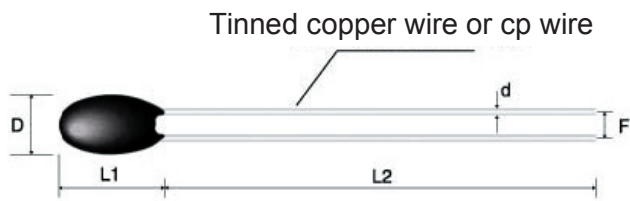


A: Tin. Ag. nickel plated cu wire

Code	D max	L ₁ max	L ₂ min	d +/- 0.05	F +/- 0.5
A1	2.5	4.0	25	0.3	1.7
A2	3	4.5	25	0.45	2.2

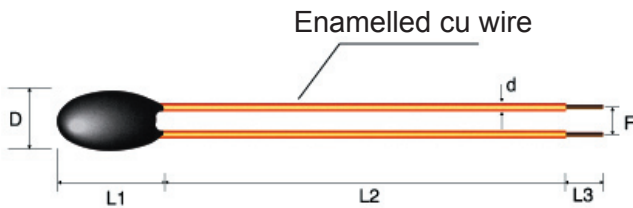

B: Enamelled cu wire

Code	D max	L ₁ max	L ₂ min	L ₃ +/- 1	d +/- 0.05
B1	2	3.5	Customer Specified	3	0.2
B2	3	4	Customer Specified	3	0.3

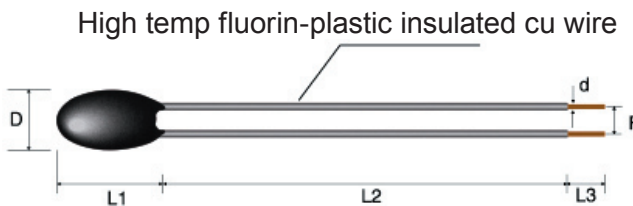

C: High temp fluorin-plastic wire


Code	D max	L ₁ max	L ₂ min	L ₃ +/- 1	d +/- 0.05
C1	3	7.5	Customer Specified	5	0.26
C2	4	7.5	Customer Specified	5	0.32

Application

- Heating, Ventilation & Air Conditioning
- Temperature Regulation and Measurement
- Electronic Thermometers
- Liquid Level Sensing
- Automotive Electronics
- Medical Equipment and Apparatus
- Battery Packs and Portable Electronics


Characteristics

- Small Size and fast response
- Available tolerances: $\pm 1\%$, $\pm 2\%$, $\pm 3\%$, $\pm 5\%$ and $\pm 10\%$
- Long-term Stability and Reliability
- Excellent Tolerance and Interchangeability
- Available in all popular resistance values
- Dissipation Constant $\geq 2.0\text{mW}/^\circ\text{C}$
- Time Constant of ≤ 7 seconds in still air
- Available in custom probes

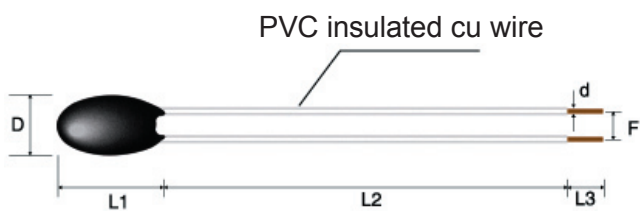


D: PVC wire

Code	D max	L ₁ max	L ₂ min	L ₃ +/- 1	d +/- 0.05
D1	3	7.5	Customer Specified	5	0.26
D2	4	7.5	Customer Specified	5	0.32

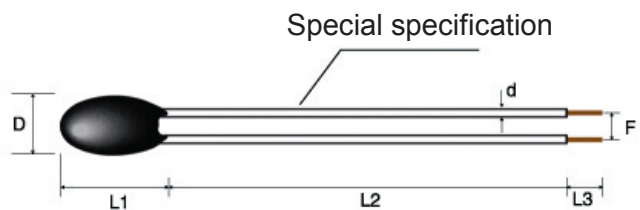

E: Lead and head according to specification


Code	D max	L ₁ max	L ₂ min	L ₃ +/- 1	d +/- 0.05
E1	Customer Specified	Customer Specified	Customer Specified	5	Customer Specified
E2	Customer Specified	Customer Specified	Customer Specified	5	Customer Specified

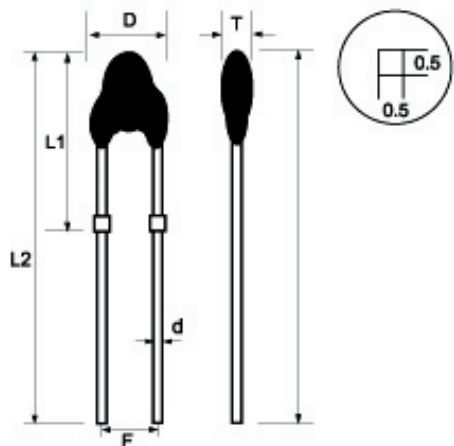

F: Tinned lead-frame style

Code	D max	L ₁ max	L ₂ +/- 1.5	d max	F +/- 0.5	T max
F	3.8	9.5	17	0.5	2.5	3.5

Specification

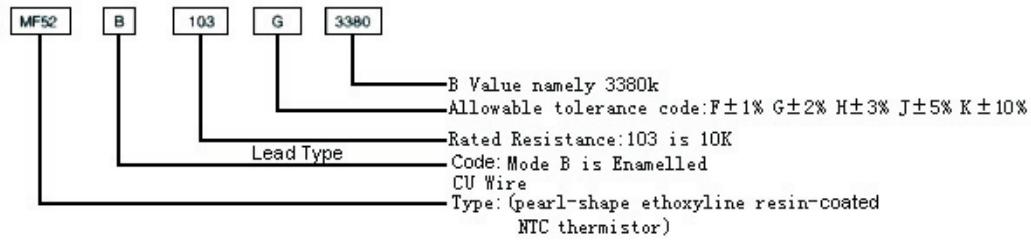

Main Techno-Parameter

Part No.	Rated Resistance R ₂₅ (KΩ)	B Value (25/50°C) (K)	Rated Power(mw)	Dissi. Coef. (mW/ °C)	Thermal time Constant(S)	Operating Temp.(°C)
MF52□□□3100	0.1-20	3100	≤ 50	≥ 2.0 In Still Air	≤ 7 In Still Air	-55° - +125°C
MF52□□□3270	0.2-20	3270				
MF52□□□3380	0.5-50	3380				
MF52□□□3470	0.5-50	3470				
MF52□□□3600	1-100	3600				
MF52□□□3950	5-100	3950				
MF52□□□4000	5-100	4000				
MF52□□□4050	5-200	4050				
MF52□□□4150	10-250	4150				
MF52□□□4300	20-1000	4300				
MF52□□□4500	20-1000	4500				

Remark:

* B Value (25/50C) error is ±1% for components with rated resistance tolerance of ±1% and ±2% for all others.

Notice:

* The two ends of the lead wire cannot endure too big pull because of the small size and soldered spot in series of MF52.

* Solder at least 5mm from the bottom of wire.



UL 1434
(File E240991)



CQC
(File 07001019009)

* Specifications are subject to change without notice.



CANTHERM

Supplying high-quality bimetal and thermal sensor products.

8415 Mountain Sights Avenue • Montreal (Quebec), H4P 2B8, Canada

Tel: (514) 739-3274 • 1-800-561-7207 • Fax: (514) 739-2902 • E-mail: sales@cantherm.com

Website: www.cantherm.com | Division of Microtherm

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.